

# Valve Mounted Cylinder

## Double Acting, Single Rod

# CVJ5 Series

ø10, ø16

### How to Order

**Mounting type**

B	Basic type
L	Axial foot type
F	Rod side flange type

**Bore size**

ø10	15, 30, 45, 60
ø16	15, 30, 45, 60

**Stroke (mm)**

10	10 mm
16	16 mm

**Electrical entry**

G	Grommet
L	L plug connector
M	M plug connector

**Light/Surge voltage suppressor**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
R	With surge voltage suppressor (No polarity)
U	With light/surge voltage suppressor (No polarity)

\* Type "R", "U": DC only  
\* In the case of AC, since the rectifier prevents the production of surge voltage, there is no type "S".

**With auto switch** **CVJ5 L 16 - 60 - 5 L -**

**With auto switch** **CDVJ5 L 16 - 60 - 5 L - M9BW - C -**

**With auto switch** (Built-in magnet)

**Auto switch mounting bracket** <sup>(Note)</sup>

Note) This symbol is indicated when the D-A9□ or M9□ type auto switch is specified. This mounting bracket does not apply to other auto switches (D-C7□ and H7□, etc.) (Nil)

**Built-in Magnet Cylinder Model**

Suffix the symbol "A" (Rail mounting type) or "B" (Band mounting type) to the end of the w/ auto switch cylinder part number.

Example	Rail mounting type	CDVJ5B16-60-A
	Band mounting type	CDVJ5B10-45-B

**Solenoid valve voltage**

DC specifications		AC specifications (50/60 Hz)	
S	24 VDC	1	100 VAC
6	12 VDC	2	200 VAC
V	6 VDC	3	110 VAC (115 VAC)
S	5 VDC	4	220 VAC (230 VAC)
R	3 VDC		

**Auto switch**

Magnet installed even without auto switch

Symbol	Auto switch mounting
A	Rail mounting type
B	Band mounting type

**Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

\* For the applicable auto switch model, refer to the table below.

**Made to Order**  
Refer to page 751 for details.

### Applicable Auto Switches/Refer to pages 941 to 1067 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model				Lead wire length (m)					Pre-wired connector	Applicable load	
					DC	AC	Band mounting		Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)			
							Perpendicular	In-line	Perpendicular	In-line								
Solid state auto switch	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	—	—	●	●	○	○	○	IC circuit	
								—	—	F7NV	F79	●	●	○	○	○		
				M9PV				M9P	—	—	●	●	○	○	○			
		—		—				F7PV	F7P	●	●	○	○	○				
		M9BV		M9B				—	—	●	●	○	○	○				
		—		—				F7BV	J79	●	●	○	○	○				
	Water resistant (2-color indicator)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NWV	M9NW	—	—	●	●	○	○	○	IC circuit	
								—	—	F7NWV	F79W	●	●	○	○	○		
				M9PWV				M9PW	—	—	●	●	○	○	○			
		—		—				F7PW	—	●	●	○	○	○				
		M9BWW		M9BW				—	—	●	●	○	○	○				
		—		—				F7BWW	J79W	●	●	○	○	○				
Reed auto switch	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN equivalent)	24 V	5 V, 12 V	—	A96V	A96	—	—	●	●	○	○	○	IC circuit	
								—	—	A76H	—	●	●	○	○	○		
				—				—	A72H	—	●	●	○	○	○			
		—		—				A93V <sup>*2</sup>	A93	A73	A73H	●	●	○	○	○		
		—		—				A90V	A90	A80	A80H	●	●	○	○	○		
		—		—				C73C	A73C	—	—	●	●	○	○	○		
	Water resistant (2-color indicator)	Grommet	Yes	2-wire	24 V	12 V	100 V or less	A90V	A90	A80	A80H	●	●	○	○	○	IC circuit	
								—	—	C73C	A73C	—	—	●	●	○		○
				—				—	C80C	A80C	—	—	●	●	○	○		○
		—		—				—	A79W	—	—	●	●	○	○	○		
		—		—				—	—	—	—	●	●	○	○	○		
		—		—				—	—	—	—	●	●	○	○	○		

\* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW  
1 m..... M (Example) M9NWM  
3 m..... L (Example) M9NWL  
5 m..... Z (Example) M9NZZ

\* Since there are other applicable auto switches than listed, refer to page 759 for details.  
\* For details about auto switches with pre-wired connector, refer to pages 1014 and 1015.

\* Solid state auto switches marked with "○" are produced upon receipt of order.  
\* D-A9□/M9□/A7□/A8□/F7□/J7□ auto switches are shipped together (not assembled). (For D-A9□/M9□, only auto switch mounting brackets are assembled before shipped.)  
\* D-C7□/C80□/H7□ auto switches are assembled at the time of shipment.  
\* Order auto switch mounting brackets separately when D-A9□(V)/M9□(V)/M9□(W(V))/M9□(A(V)) are mounted on ø10 and ø16 of the rail mounting type. Refer to page 759 for details.  
\* 1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.  
\* 2 1 m type lead wire is only applicable to D-A93.

# Valve Mounted Cylinder **CVJ5 Series**


Operation type can be changed to rod extended when energized or rod retracted when energized.

An auto switch cylinder with the switch installed can also be manufactured.



### Symbol

Double acting/Single rod, Rubber bumper



### Made to Order Specifications

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape

### Specifications

Bore size (mm)	ø10	ø16
Action	Double acting, Single rod	
Fluid	Air	
Proof pressure	1.05 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.15 MPa	
Ambient and fluid temperature	-10 to 50°C (No freezing)	
Cushion	Rubber bumper	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	+1.0 0	
Port size	M5 x 0.8	
Mounting	Basic type, Axial foot type, Rod side flange type	
Piston speed	50 to 750 mm/s	50 to 150 mm/s
Allowable kinetic energy	0.035J	0.090J

### Solenoid Valve Specifications

Applicable solenoid valve model		SYJ3190	
Electrical entry		Grommet (G), L plug connector (L), M plug connector (M)	
Coil rated voltage (V)	DC	24, 12, 6, 5, 3	
	AC 50/60 Hz	100, 110, 200, 220	
Effective area of valve (Cv factor)		1.8 mm <sup>2</sup> (0.1)	
Allowable voltage		±10% of the rated voltage*	
Power consumption (W)	DC	Standard	0.35 (With indicator light: 0.4)
	AC	100 V	0.78 (With indicator light: 0.81)
110 V [115 V]		0.86 (With indicator light: 0.89) [0.94 (With indicator light: 0.97)]	
200 V		1.18 (With indicator light: 1.22)	
220 V [230 V]		1.30 (With indicator light: 1.34) [1.42 (With indicator light: 1.46)]	
Surge voltage suppressor		Diode (Varistor for the non-polar type)	
Indicator light		LED	

- \* 110 VAC and 115 VAC types and 220 VAC and 230 VAC types are common respectively.
- \* For 115 VAC and 230 VAC, allowable voltage fluctuation is -15 to +5 % of the rated voltage.
- \* For S and Z, the voltage will drop due to the internal circuit. Allowable voltage fluctuation must be in the range below.
- Types S, Z 24 VDC: -7 to 10 %, 12 VDC: -4 to 10 %

### Standard Stroke

Bore size (mm)	Standard stroke (mm)
10	15, 30, 45, 60
16	15, 30, 45, 60

- \* If types for more than the strokes indicated in the table above (61 strokes) are required, please ask SMC.

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

-X□

# CVJ5 Series

## Mounting Type and Accessory For details, refer to page 755.

Mounting		Basic type	Axial foot type	Rod side flange type
Standard equipment	Mounting nut	●	●	●
	Rod end nut	●	●	●
Option	Single knuckle joint	○	○	○
	Double knuckle joint (With pin)*	○	○	○

\* Knuckle pin and retaining ring are shipped together. ●---Supplied with the product. ○---Please order separately.

## Weight (g)

Bore size (mm)		10	16
Basic weight*		71	99
Additional weight per each 15 mm of stroke		6.5	9.5
Mounting bracket weight	Axial foot type	7	19
	Rod side flange type	5	13

\* Mounting nut and rod end nut are included in the basic weight.

Calculation: (Example) **CVJ5L10-45-1G**

- Basic weight.....71 (g) (ø10)
  - Additional weight .....6.5/15 stroke
  - Cylinder stroked .....45 stroke
  - Weight of bracket .....7 (g) (Axial foot type)
- 71 + 6.5/15 x 45 + 7 = 97.5 g

## Mounting Bracket Part No.

Mounting bracket	Bore size (mm)	
	10	16
Foot	CJ-L010B	CJ-L016B
Flange	CJ-F010B	CJ-F016B

## Accessory (Option)


Refer to page 755 for part numbers and dimensions of the single knuckle joint, double knuckle joint, knuckle pin, mounting nut, and rod end nut.

## Changing between Rod Extended when Energized and Rod Retracted when Energized


<Step>

**This procedure is for changing the rod extended when energized to the rod retracted when energized.**


- Using a screwdriver, loosen the two small round head screws, and remove the plate and the solenoid valve. At this time, instead of removing the plate and the solenoid valve separately, remove them together, with the round head screws remaining inserted.



- Turn the pipe gasket at 180° and mount, showing the letter "B".




- Install the solenoid valve and the plate, and tighten the small round head screws, with a screw driver. After tightening, press the manual button on the solenoid valve, check for any air leaks, and verify the operating conditions. When the cylinder is viewed from above, the position of the gasket is as shown in the figure below.



## Manual Operation

Manual operation is possible by pushing the manual button indicated with the arrow.



## Specific Product Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, pages 3 to 12 for Actuator and Auto Switch Precautions, and 3/4/5 Port Solenoid Valve Precautions in Best Pneumatics No. 1-1.

## Handling Precautions

### Caution

- During installation, secure the rod cover and tighten the mounting nut or the rod cover body by applying an appropriate tightening force.

If the head cover is secured or the head cover is tightened, the cover may rotate, leading to the deviation.

- Tighten the mounting screws with an appropriate tightening torque within the range given below.

ø6: 2.1 to 2.5 N·m, ø10: 5.9 to 6.4 N·m

ø16: 10.8 to 11.8 N·m

- To remove and install the retaining ring for the knuckle pin or the clevis pin, use an appropriate pair of pliers (tool for installing a type C retaining ring).

In particular, use a pair of ultra-mini pliers for removing and installing the retaining rings on the ø10 cylinder.

- For the auto switch mounting rail, do not remove the pre-equipped rail.

Since the mounting thread is drilled through inside the cylinder, it may cause air leakage.

### Warning

- Confirm the specifications.


Products in this catalog are designed to be used for compressed air systems. If not operated within the designated pressure or temperature, it may damage the products or cause malfunction. (Refer to specifications.)

- Energizing continuously for a long period of time

When the valve is continuously energized for a long period of time, the performance may deteriorate, shorten the service life or effect peripheral equipment adversely since temperature rises when coils generate heat.

# Valve Mounted Cylinder **CVJ5 Series**

**Construction/(Not able to disassemble.)**

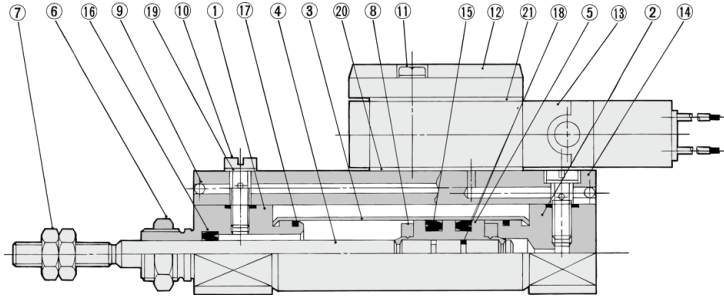

## Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear anodized
2	Head cover	Aluminum alloy	Clear anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston	Aluminum alloy	Chromated
6	Mounting nut	Brass	Nickel plated
7	Rod end nut	Rolled steel	Zinc chromated
8	Bumper	Urethane	
9	Steel ball	Carbon steel	
10	Stud	Brass	Electroless nickel plated
11	Phillips screw	Rolled steel	Zinc chromated

No.	Description	Material	Note
12	Plate	Zinc alloy	
13	Solenoid valve	—	* Refer to the note below.
14	Pipe	Aluminum alloy	Clear anodized
15	Piston seal	NBR	
16	Rod seal	NBR	
17	Tube gasket	NBR	
18	Piston gasket	NBR	
19	Gasket	NBR + Stainless steel 304	
20	Pipe gasket	NBR	
21	Plate gasket	NBR	


\* How to order solenoid valves

SYJ3190 - □ □ □ □

Rated voltage ↓ □ □ □ □  
 ↓ Light/surge voltage suppressor  
 ↓ Electrical entry

## Basic Type (B)

### CVJ5

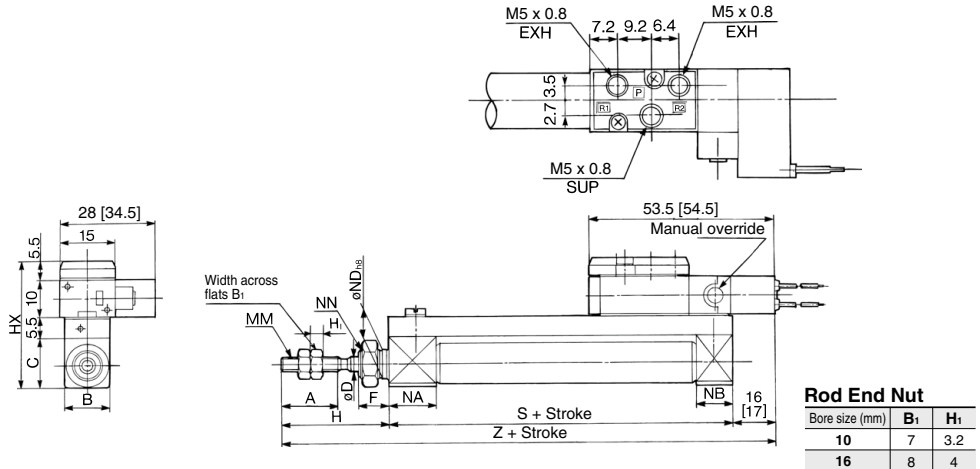

\* [ ]: Denotes the values of AC.

Bore size	A	B	C	D	F	H	HX	MM	NA	NB	ND	NN	S	Z
10	15	12	14	4	8	28	35	M4 x 0.7	12.5	9.5	8 <sup>0</sup> <sub>-0.022</sub>	M8 x 1	46	90 [91]
16	15	18	20	5	8	28	41	M5 x 0.8	12.5	9.5	10 <sup>0</sup> <sub>-0.022</sub>	M10 x 1	47	91 [92]

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□


-X□



# CVJ5 Series

## Axial Foot Type (L)

CVJ5L

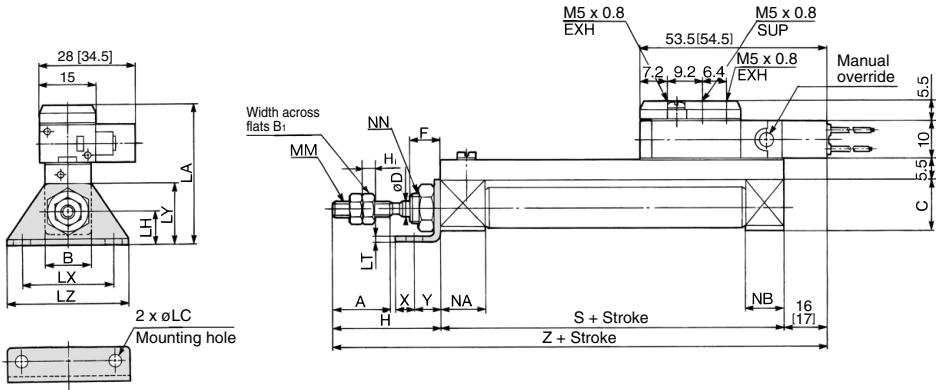

### Rod End Nut


Bore size (mm)	B <sub>1</sub>	H <sub>1</sub>
10	7	3.2
16	8	4

\* [ ]: Denotes the values of AC.

Bore size	A	B	C	D	F	H	LA	LC	LH	LT	LX	LY	LZ	MM	NA	NB	NN	S	X	Y	Z
10	15	12	14	4	8	28	38	4.5	9	1.6	24	16.5	32	M4 x 0.7	12.5	9.5	M8 x 1	46	5	7	90 [91]
16	15	18	20	5	8	28	46	5.5	14	2.3	33	25	42	M5 x 0.8	12.5	9.5	M10 x 1	47	6	9	91 [92]

## Rod Side Flange Type (F)

CVJ5F

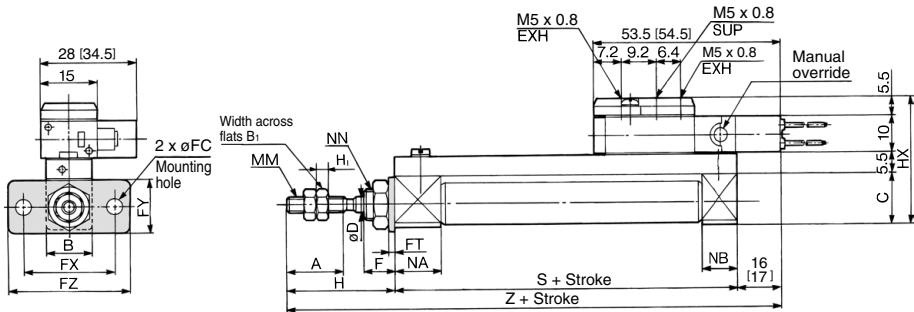

### Rod End Nut

Bore size (mm)	B <sub>1</sub>	H <sub>1</sub>
10	7	3.2
16	8	4


\* [ ]: Denotes the values of AC.

Bore size	A	B	C	D	F	FC	FT	FX	FY	FZ	H	HX	MM	NA	NB	NN	S	X	Y	Z
10	15	12	14	4	8	4.5	1.6	24	14	32	28	35	M4 x 0.7	12.5	9.5	M8 x 1	46	5	7	90 [91]
16	15	18	20	5	8	5.5	2.3	33	20	42	28	41	M5 x 0.8	12.5	9.5	M10 x 1	47	6	9	91 [92]

# CVJ5 Series Accessory Dimensions

## Single Knuckle Joint

(mm)




Material: Rolled steel

Part no.	Applicable bore size	A <sub>1</sub>	L <sub>1</sub>	MM	ND <sup>H10</sup>	NX	R <sub>1</sub>	U <sub>1</sub>
I-J010B	10	8	21	M4 x 0.7	3.3 <sup>+0.048</sup> <sub>0</sub>	3.1	8	9
I-J016B	16	8	25	M5 x 0.8	5 <sup>+0.048</sup> <sub>0</sub>	6.4	12	14

## Double Knuckle Joint

(mm)




Material: Rolled steel

Part no.	Applicable bore size	A <sub>1</sub>	L	L <sub>1</sub>	MM	ND <sub>09</sub>	ND <sup>H10</sup>	NX	R <sub>1</sub>	U <sub>1</sub>
Y-J010B	10	8	16.2	21	M4 x 0.7	3.3 <sup>+0.030</sup> <sub>-0.060</sub>	3.3 <sup>+0.048</sup> <sub>0</sub>	3.2	8	10
Y-J016B	16	11	16.6	21	M5 x 0.8	5 <sup>+0.030</sup> <sub>-0.060</sub>	5 <sup>+0.048</sup> <sub>0</sub>	6.5	12	10

\* Knuckle pin and retaining ring are shipped together.

## Rod End Nut

(mm)




Material: Iron

Part no.	Applicable bore size	B	C	d	H
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

## Knuckle Pin

(mm)




Material: Stainless steel

Part no.	Applicable bore size	Dd9	d	L	L <sub>1</sub>	m	t	Applicable retaining ring
IY-J010	10	3.3 <sup>-0.030</sup> <sub>-0.060</sub>	3	16.2	12.2	1.7	0.3	Type C 3.2
IY-J015	16	5 <sup>-0.030</sup> <sub>-0.060</sub>	4.8	16.6	12.2	1.5	0.7	Type C 5

\* Retaining rings are included.

## Mounting Nut

(mm)



Material: Brass

Part no.	Applicable bore size	B	C	d	H
SNJ-010B	10	11	12.7	M8 x 1.0	4
SNJ-016B	16	14	16.2	M10 x 1.0	4

CVQ

CVQM

CVJ

CVM

CV3

CVS1

MVGQ

D-

-X


# Auto Switch Mounting 1

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height

### Reed auto switch


#### <Band mounting>

##### D-A9□




( ) : For D-A96 type  
A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.

##### D-C7□/C80




##### D-C73C□/C80C




#### <Rail mounting>

##### D-A9□

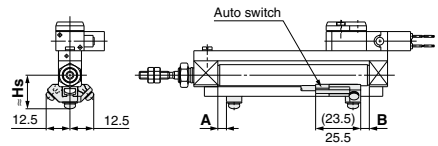


( ) : For D-A96 type


##### D-A9□V

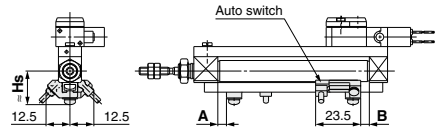


##### D-A7□/A80

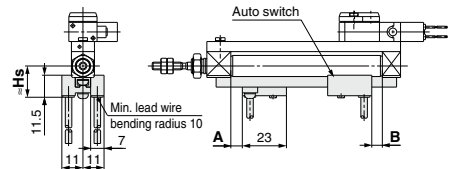


##### D-A7□H/A80H

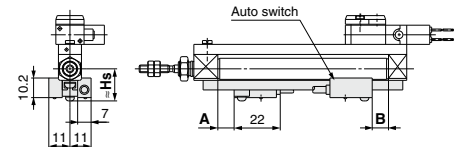

##### D-A73C/A80C

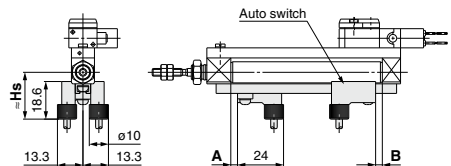

##### D-A79W

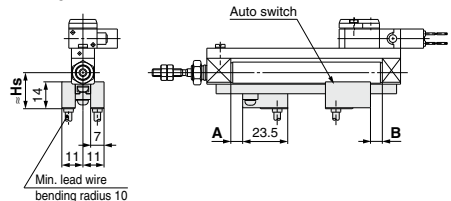


**Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height**


**Solid state auto switch**

**<Band mounting>**


D-M9□  
D-M9□W



D-H7□  
D-H7□W  
D-H7NF




D-H7C




**<Rail mounting>**


D-M9□  
D-M9□W




D-M9□V  
D-M9□WV




D-F7□/J79  
D-F7□W/J79W  
D-F79F

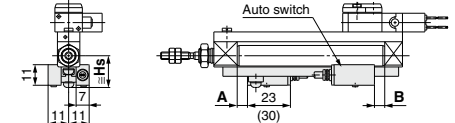

D-F7□V/F7□WV

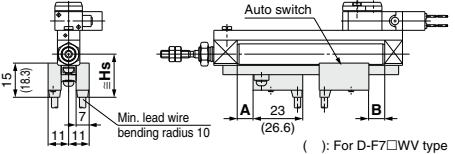

D-J79C

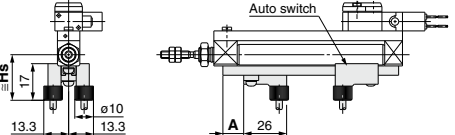

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

**Auto Switch Proper Mounting Position**

Auto switch model	Band mounting						Rail mounting													
	D-A9□ D-A9□V		D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□A D-M9□AW		D-C7□ D-C80 D-C73C D-C80C		D-H7□ D-H7C D-H7NF D-H7□W		D-A9□ D-A9□V		D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□AV		D-A7□ D-A80		D-A7□/H/A80H D-A73C/A80C D-F7□/J79 D-F7□W/J79W D-F7□V/F7□WV D-F79F/J79C		D-F7NT		D-A79W	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
<b>10</b>	2	2	6	6	2.5	2.5	1.5	1.5	0.5	0.5	4.5	4.5	3	3	3.5	3.5	8.5	8.5	0.5	0.5
<b>16</b>	2.5	2.5	6.5	6.5	3	3	2	2	1	1	4	4	3.5	3.5	4	4	9	9	1	1

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

**Auto Switch Mounting Height**

Auto switch model	Band mounting					Rail mounting									
	D-A9□ D-M9□ D-M9□W D-M9□A	D-M9□V D-M9□WV D-A9□V	D-C7□/C80 D-H7□/H7□W D-H7NF	D-C73C D-C80C	D-H7C	D-A9□/A9□V D-M9□/M9□V D-M9□W D-M9□WV	D-A7□ D-A80	D-A7□/H/A80H D-F7□/J79 D-F7□W/J79W D-F79F	D-A73C D-A80C	D-F7□V D-F7□WV	D-J79C	D-A79W			
Bore size (mm)	Hs	Hs	Hs	Hs	Hs	Hs	Hs	Hs	Hs	Hs	Hs	Hs			
<b>10</b>	17	18	17	19.5	20	17.5	16.5	17.5	23.5	20	23	19			
<b>16</b>	20.5	21	20.5	23	23.5	21	19.5	20.5	26.5	23	26	22			

D-□



-X□

## Minimum Auto Switch Mounting Stroke

		(mm)				
Auto switch mounting	Auto switch model	No. of auto switches mounted				
		1	2		n (n: No. of auto switches)	
			Different surfaces	Same surface	Different surfaces	Same surface
Band mounting	D-M9□/M9□W D-A9□/M9□A	10	15 <small>Note 1)</small>	45 <small>Note 1)</small>	$15 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	$45 + 15 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
	D-M9□V	5	15 <small>Note 1)</small>	35	$15 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	$35 + 25 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
	D-M9□WV D-M9□AV	10	15 <small>Note 1)</small>	35	$15 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	$35 + 25 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
	D-A9□V	5	10	35	$10 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	$35 + 25 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
	D-C7□ D-C80	10	15	50	$15 + 40 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	$50 + 20 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
	D-H7□ D-H7□W D-H7NF	10	15	60	$15 + 45 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	$60 + 22.5 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
	D-C73C D-C80C D-H7C	10	15	65 <small>Note 2)</small>	$15 + 50 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	$50 + 27.5 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
	Rail mounting	D-M9□V	5	—	5	—
D-A9□V		5	—	10	—	$10 + 15 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-M9□ D-A9□		10	—	10	—	$15 + 15 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-M9□WV D-M9□AV		10	—	15	—	$15 + 15 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-M9□W		15	—	15	—	$20 + 15 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-M9□A		15	—	20	—	$20 + 15 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-A7□/A80 D-A7□H/A80H D-A73C/A80C		5	—	10	—	$15 + 10 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-A7□H D-A80H		5	—	10	—	$15 + 15 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-A79W		10	—	15	—	$10 + 15 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-F7□ D-J79		5	—	5	—	$15 + 15 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-F7□V D-J79C		5	—	5	—	$10 + 10 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-F7□W/J79W D-F79F/F7NT		10	—	15	—	$15 + 20 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>
D-F7□WV		10	—	15	—	$10 + 15 (n-2)$ <small>(n = 4, 6...)</small> <small>Note 5)</small>

Note 4) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.  
 Note 5) When "n" is an even number, an even number that is one larger than this odd number is used for the calculation.  
 However, the minimum even number is 4. So, 4 is used for the calculation when "n" is 1 to 3.


Note 1) Auto switch mounting (The adjustment as shown in the figures below is required with the following stroke ranges.)

Auto switch model	With 2 auto switches	
	Different surfaces <small>Note 1)</small>	Same surface <small>Note 1)</small>
	 <p>The proper auto switch mounting position is 5.5 mm inward from the switch holder edge.</p>	 <p>The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with each other.</p>
D-A93	—	45 to less than 50 stroke
D-M9□ D-M9□W	15 to less than 20 stroke	45 to less than 55 stroke

Note 2) For the CDVJ5 series, note that 65 strokes cannot be manufactured.

Note 3) The dimension stated in ( ) shows the minimum stroke for the auto switch mounting when the auto switch does not project from the end surface of the cylinder body and hinder the lead wire bending space. (Refer to the figure below.)

These contents apply to the rail mounting with one or two auto switches.



## Operating Range

Auto switch model	Bore size (mm)	
	10	16
<b>D-A9□(V)</b>	6	7
<b>D-M9□(V)</b>	2.5	3
<b>D-M9□W(V)/M9□A(V)</b>		
<b>D-C7□/C80/C73C/C80C</b>	7	7
<b>D-H7□/H7□W/H7NF</b>	4	4
<b>D-H7C</b>	8	9

\* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approximately ±30% dispersion). It may vary substantially depending on an ambient environment.

Auto switch model	Bore size (mm)	
	10	16
<b>D-A9□/A9□V</b>	6	6.5
<b>D-M9□/M9□V</b>	3	3.5
<b>D-M9□W/M9□WV</b>		
<b>D-M9□A/M9□AV</b>	8	9
<b>D-A7□/A80/A7H/A80H/A73C/A80C</b>		
<b>D-A79W</b>		
<b>D-F7□/J79/F7□W/J79W</b>	5	5
<b>D-F7□V/F7□WV/F79F/J79C</b>		
<b>D-F7NT</b>		

## Auto Switch Mounting Bracket: Part No.

Auto switch mounting	Auto switch model	Bore size (mm)	
		ø10	ø16
Band mounting	<b>D-M9□</b> <b>D-M9□V</b> <b>D-M9□W</b> <b>D-M9□WV</b> <b>D-A9□</b> <b>D-A9□V</b>	BJ6-010 Note 1)	BJ6-016 Note 1)
	<b>D-M9□A</b> <b>D-M9□AV</b>	BJ6-010S Note 2)	BJ6-016S Note 2)
Band mounting	<p>(1) BJ2-□□□ is a set of "a" and "b".                      (2) BJ2-1 is a set of "c" and "d".                      BJ4-1 (Switch bracket: White)                      BJ5-1 (Switch bracket: Transparent)</p>	BJ2-010	BJ2-016
		<b>D-C7□/C80</b> <b>D-C73C/C80C</b> <b>D-H7□/H7□W</b> <b>D-H7NF</b>	BJ2-010
Rail mounting	<b>D-A9□</b> <b>D-A9□V</b> <b>D-M9□</b> <b>D-M9□V</b> <b>D-M9□W</b> <b>D-M9□WV</b> <b>D-M9□A</b> <b>D-M9□AV</b>	BQ2-012 Note 5)	BQ2-012 Note 5)

Note 1) Set part number which includes the auto switch mounting band (BJ2-□□□) and the holder kit (BJ5-1/Switch bracket: Transparent). Since the switch bracket (made from nylon) are affected in an environment where alcohol, chloroform, methylamines, hydrochloric acid or sulfuric acid is splashed over, so it cannot be used. Please consult SMC regarding other chemicals.

Note 2) Set part number which includes the auto switch mounting band (BJ2-□□□S) and the holder kit (BJ4-1/Switch bracket: White).

Note 3) For the D-M9□A (V) type auto switch, do not install the switch bracket on the indicator light.

Note 4) Only auto switch mounting brackets are assembled when cylinders are shipped.

Note 5) When a compact auto switch is mounted on the rail mounting type, the auto switch mounting brackets on the left are required. Order them separately from cylinders.

Example order: CDJ2B10-60-A ..... 1 unit  
 D-M9BWV ..... 2 pcs.  
 BQ2-012 ..... 2 pcs.

**Besides the models listed in How to Order, the following auto switches are applicable. Refer to pages 941 to 1067 for detailed specifications.**

Auto switch type	Part no.	Electrical entry (Fetching direction)	Features
Reed	D-C73, C76	Grommet (In-let)	—
	D-C80		Without indicator light
Solid state	D-H7A1, H7A2, H7B		—
	D-H7NW, H7PW, H7BW		Diagnostic indication (2-color)

\* For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1014 and 1015 for details.

\* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H types) are also available. Refer to page 959 for details.

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

-X□

# Valve Mounted Cylinder

## Single Acting, Spring Return/Extend

# CVJ3 Series

ø10, ø16

### How to Order

**Stroke (mm)**

ø10	15, 30, 45, 60
ø16	15, 30, 45, 60

**Mounting type**

B	Basic type
L	Axial foot type
F	Rod side flange type

**Bore size**

10	10 mm
16	16 mm

**Electrical entry**

G	Grommet
L	L plug connector
M	M plug connector

**Light/Surge voltage suppressor**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
R	With surge voltage suppressor (No polarity)
U	With light/surge voltage suppressor (No polarity)

\* Type "R", "U": DC only  
\* In the case of AC, since the rectifier prevents the production of surge voltage, there is no type "S".

**CVJ3 L 16 - 60 S - 5 L**

**With auto switch CDVJ3 L 16 - 60 S - 5 L - M9BW - C**

**With auto switch (Built-in magnet)**

**Action**

S	Single acting, Spring return
T	Single acting, Spring extend

**Solenoid valve voltage**

DC specifications		AC specifications (50/60 Hz)	
5	24 VDC	1	100 VAC
6	12 VDC	2	200 VAC
V	6 VDC	3	110 VAC (115 VAC)
S	5 VDC	4	220 VAC (230 VAC)
R	3 VDC		

**Built-in Magnet Cylinder Model**

Suffix the symbol "-B" (Band mounting type) or "-A" (Rail mounting type) to the end of the w/ auto switch cylinder part number.

Example: Band mounting type CDVJ3B10-45-B  
Rail mounting type CDVJ3B16-60-A

**Auto switch**

Magnet installed even without auto switch

Symbol	Auto switch mounting
A	Rail mounting type
B	Band mounting type

**Auto switch mounting bracket** (Note)

Note) This symbol is indicated when the D-A9□ or M9□ type auto switch is specified. This mounting bracket does not apply to other auto switches (D-C7□ and H7□, etc.) (Nil)

**Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

**Made to Order**  
Refer to page 761 for details.

### Applicable Auto Switch/Refer to pages 941 to 1067 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model				Lead wire length (m)					Pre-wired connector	Applicable load	
					DC	AC	Band mounting		Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)			
							Perpendicular	In-line	Perpendicular	In-line								
Solid state auto switch	—	Grommet	—	3-wire (NPN)	5 V, 12 V	—	M9NV	M9N	—	—	●	●	●	○	—	○	IC circuit	
							—	—	F7NV	F7N	—	—	—	—	—	—		
				M9PV			M9P	—	—	●	●	●	○	—	○			
		—		—			F7PV	F7P	—	—	—	—	—	—				
		M9BV		M9B			—	—	●	●	●	○	—	○				
		—		—			H7C	J79C	—	—	●	—	●	—	—			
	Diagnostic indication (2-color indicator)	—	Connector	24 V	3-wire (NPN)	5 V, 12 V	—	M9NWV	M9NW	—	—	●	●	●	○	—	○	IC circuit
								—	—	F7NWV	F79W	—	—	—	—	—	—	
					M9PWV			M9PW	—	—	●	●	●	○	—	○		
		—	—		F7PW			—	—	—	—	—	—	—				
		M9BWW	M9BW		—			—	●	●	●	○	—	○				
		—	—		F7BWW			J79W	—	—	●	—	●	—	—			
Water resistant (2-color indicator)	—	Grommet	24 V	3-wire (NPN)	5 V, 12 V	—	M9NAV <sup>*1</sup>	M9NA <sup>*1</sup>	—	—	○	○	○	—	○	IC circuit		
							M9PAV <sup>*1</sup>	M9PA <sup>*1</sup>	—	—	○	○	●	—	○		—	
				M9BAV <sup>*1</sup>			M9BA <sup>*1</sup>	—	—	○	○	○	○	—	—			
	—	—		H7NF			—	—	—	—	—	—	—					
	—	—		F79F			—	—	—	—	—	—	—					
	—	—		A96V			A96	—	—	●	—	—	—	—				
Read auto switch	—	Grommet	24 V	2-wire	12 V	—	A93V <sup>*2</sup>	A93	A73	A73H	●	●	●	—	—	IC circuit		
							A90V	A90	A80	A80H	●	●	●	—	—			
				—			—	C73C	A73C	—	—	—	—	—	—			
	—	—		C80C			A80C	—	—	—	—	—	—					
	—	—		—			—	—	—	—	—	—	—					
	—	—		A79W			—	—	—	●	—	●	—	—				
Diagnostic indication (2-color indicator)	—	Connector	24 V	2-wire	24 V or less	—	—	—	—	—	●	●	●	—	—	IC circuit		
							—	—	—	—	—	—	—	—	—			
				—			—	—	—	—	—	—	—	—	—			
	—	—		—			—	—	—	—	—	—	—					
	—	—		—			—	—	—	—	—	—	—					
	—	—		—			—	—	—	—	—	—	—					

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Consult with SMC regarding water resistant types with the above model numbers.

\*2 1 m type lead wire is only applicable to D-A93.

\* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW  
1 m..... M (Example) M9NWM  
3 m..... L (Example) M9NWL  
5 m..... Z (Example) M9NWZ

\* Solid state auto switches marked with "C" are produced upon receipt of order.

\* D-A9□/M9□/A7□/A80□/F7□/J7□ auto switches are shipped together (not assembled). (For D-A9□/M9□, only auto switch mounting brackets are assembled before shipped.)

\* D-C7□/C80□/H7□ auto switches are assembled at the time of shipment.

\* Order auto switch mounting brackets separately when D-A9□(V)/M9□(V)/M9□W(V)/M9□A(V) are mounted on ø10 and ø16 of the rail mounting type. Refer to page 770 for details.


# Valve Mounted Cylinder **CVJ3 Series**

An auto switch cylinder with the switch installed can also be manufactured.




## Symbol

Single acting:  
Spring return, Rubber bumper



Single acting:  
Spring extend, Rubber bumper



**Made to Order** **Made to Order Specifications**  
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape

## Specifications

Bore size (mm)	ø10	ø16
Action	Single acting, Single rod, Spring return/Spring extend	
Fluid	Air	
Proof pressure	1.05 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.15 MPa	
Ambient and fluid temperature	-10 to 50°C (No freezing)	
Cushion	Rubber bumper	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	$+1.0$ 0	
Port size	M5 x 0.8	
Mounting	Basic type, Axial foot type, Rod side flange type	
Piston speed	50 to 750 mm/s	50 to 350 mm/s
Allowable kinetic energy	0.035 J	0.090 J

## Solenoid Valve Specifications

Applicable solenoid valve model		SYJ319	
Electrical entry		Grommet (G), L plug connector (L), M plug connector (M)	
Coil rated voltage (V)	DC	24, 12, 6, 5, 3	
	AC 50/60 Hz	100, 110, 200, 220	
Effective area of valve (Cv factor)		1.8 mm <sup>2</sup> (0.1)	
Allowable voltage		±10% of the rated voltage*	
Power consumption (W)	DC	Standard	
	Standard	0.35 (With indicator light: 0.4)	
Apparent power (VA)*	AC	100 V	0.78 (With indicator light: 0.81)
		110 V [115 V]	0.86 (With indicator light: 0.89) [0.94 (With indicator light: 0.97)]
		200 V	1.18 (With indicator light: 1.22)
		220 V [230 V]	1.30 (With indicator light: 1.34) [1.42 (With indicator light: 1.46)]
Surge voltage suppressor		Diode (Varistor for the non-polar type)	
Indicator light		LED	

\* 110 VAC and 115 VAC types and 220 VAC and 230 VAC types are common respectively.  
\* For 115 VAC and 230 VAC, allowable voltage fluctuation is -15 to +5% of the rated voltage.  
\* For S and Z, the voltage will drop due to the internal circuit. Allowable voltage fluctuation must be in the range below.  
Types S, Z 24 VDC: -7 to 10%, 12 VDC: -4 to 10%

## Standard Stroke

(mm)

Bore size (mm)	Standard stroke
10	15, 30, 45, 60
16	15, 30, 45, 60

## Spring Back Force

(N)

Bore size (mm)	Retracted side	Extended side
10	6.9	3.5
16	14.2	6.9

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

-X□



# CVJ3 Series

## Mounting Type and Accessory/For details, refer to page 755.

	Mounting	Basic type	Axial foot type	Rod side flange type
Standard equipment	Mounting nut	●	●	●
	Rod end nut	●	●	●
Option	Single knuckle joint	○	○	○
	Double knuckle joint (With pin)*	○	○	○

\* Knuckle pin and retaining ring are shipped together. ●---Supplied with the product. ○---Please order separately.

## Accessory

Accessories of the CVJ3 series are the same specifications as those of the CVJ5 series. Refer to page 755.

## Mounting Bracket Part No.

Mounting bracket	Bore size (mm)	
	10	16
Foot	CJ-L010B	CJ-L016B
Flange	CJ-F010B	CJ-F016B

## Accessory (Option)

Refer to page 755 for part numbers and dimensions of the single knuckle joint, double knuckle joint, knuckle pin, mounting nut, and rod end nut.

## Weight

### Spring Return

		Bore size (mm)	
		10	16
Basic weight*	15 stroke	79	116
	30 stroke	87	135
	45 stroke	97	159
	60 stroke	109	184
Mounting bracket weight	Axial foot type	7	19
	Rod side flange type	5	13

\* Mounting nut and rod end nut are included in the basic weight.

Calculation: (Example) **CVJ3L10-45T**

- Basic weight ..... 97 (g) (ø10-45 stroke)
- Mounting bracket weight ..... 7 (g) (Axial foot type)
- 97 + 7 = 104 g

### Spring Extend

		Bore size (mm)	
		10	16
Basic weight*	15 Stroke	75	111
	30 Stroke	82	129
	45 Stroke	93	151
	60 Stroke	103	175
Mounting bracket weight	Axial foot type	7	19
	Rod side flange type	5	13


\* Mounting nut and rod end nut are included in the basic weight.

Calculation: (Example) **CVJ3L10-45T**

- Basic weight ..... 93 (g) (ø10-45 stroke)
- Mounting bracket weight ..... 7 (g) (Axial foot type)
- 93 + 7 = 100 g

## Manual Operation

Manual operation is possible by pushing the manual button indicated with the arrow.



## Specific Product Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, pages 3 to 12 for Actuator and Auto Switch Precautions, and 3/4/5 Port Solenoid Valve Precautions in Best Pneumatics No. 1-1.

## Handling Precautions

### Caution

1. During installation, secure the rod cover and tighten the mounting nut or the rod cover body by applying an appropriate tightening force.

If the head cover is secured or the head cover is tightened, the cover may rotate, leading to the deviation.

2. Tighten the mounting screws with an appropriate tightening torque within the range given below.

ø6: 2.1 to 2.5 N·m, ø10: 5.9 to 6.4 N·m  
ø16: 10.8 to 11.8 N·m

3. Do not operate the single acting cylinder in such a way that a load would be applied when retracting the piston rod of the spring return type or extending the piston rod of the spring extend type.

The spring that is built into the cylinder provides only enough force to retract the piston rod. If a load is applied, the piston rod will not be able to retract to the stroke end.

4. For the single acting cylinder, a breather hole is provided in the cover surface. Do not block this hole during installation.

This may cause malfunction.

5. To remove and install the retaining ring for the knuckle pin or the clevis pin, use an appropriate pair of pliers (tool for installing a type C retaining ring).

In particular, use a pair of ultra-mini pliers for removing and installing the retaining rings on the ø10 cylinder.

6. For the auto switch mounting rail, do not remove the pre-equipped rail.

Since the mounting thread is drilled through inside the cylinder, it may cause air leakage.

### Warning

1. Confirm the specifications.


Products in this catalog are designed to be used for compressed air systems. If not operated within the designated pressure or temperature, it may damage the products or cause malfunction. (Refer to specifications.)

2. Energizing continuously for a long period of time


When the valve is continuously energized for a long period of time, the performance may deteriorate, shorten the service life or effect peripheral equipment adversely since temperature rises when coils generate heat.

## Construction/Component Parts

### Single acting, Spring return

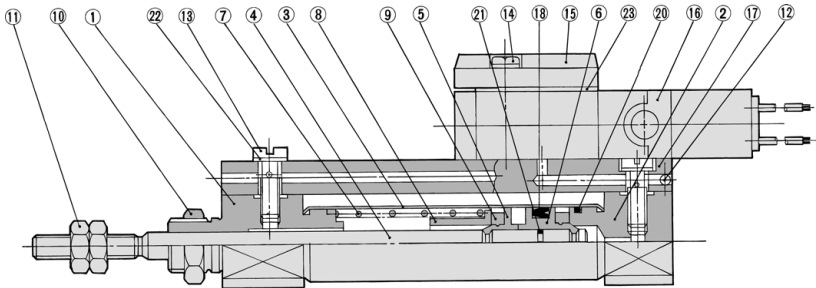

### Single acting, Spring extend

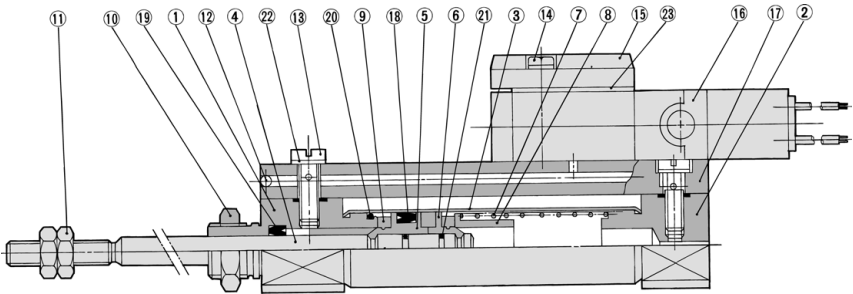

## Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear anodized
2	Head cover	Aluminum alloy	Clear anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston A	Aluminum alloy	Chromated
6	Piston B	Aluminum alloy	Chromated
7	Return spring	Piano wire	
8	Spring seat	Brass	
9	Bumper	Urethane	
10	Mounting nut	Brass	Nickel plated
11	Rod end nut	Rolled steel	Zinc chromated
12	Steel ball	Carbon steel	

No.	Description	Material	Note
13	Stud	Brass	Electroless nickel plated
14	Phillips screw	Rolled steel	Nickel plated
15	Plate	Zinc alloy	
16	Solenoid valve	—	Refer to "How to Order" below.*
17	Pipe	Aluminum alloy	Clear anodized
18	Piston seal	NBR	
19	Rod seal	NBR	
20	Tube gasket	NBR	
21	Piston gasket	NBR	
22	Gasket	NBR + Stainless steel 304	
23	Plate gasket	NBR	

\* How to Order solenoid valves

SYJ319 - □□□□

Rated voltage • Light/surge voltage suppressor  
• Electrical entry

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ


D-□

-X□

# CVJ3 Series

## Single Acting, Spring Return/Basic Type (B)

CVJ3B **Bore size** - **Stroke** S

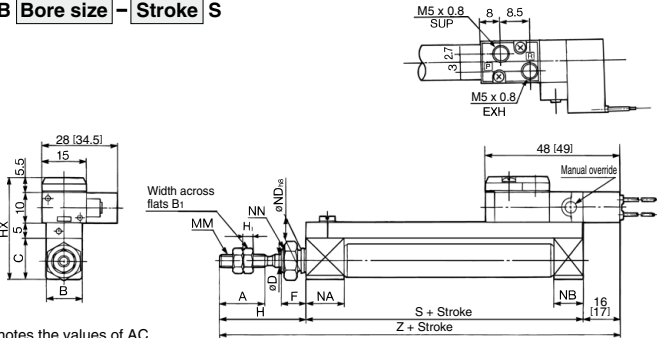

### Rod End Nut


Bore size (mm)	B <sub>1</sub>	H <sub>1</sub>
10	7	3.2
16	8	4

\* [ ]: Denotes the values of AC.

Bore size	A	B	C	D	F	H	HX	MM	NA	NB	ND	NN	5 to 15 st		16 to 30 st		31 to 45 st		46 to 60 st	
													S	Z	S	Z	S	Z	S	Z
10	15	12	14	4	8	28	34.5	M4 x 0.7	12.5	9.5	8 <sup>0</sup> <sub>-0.022</sub>	M8 x 1	52.5	96.5 (97.5)	60	104 (105)	72	116 (117)	84	128 (129)
16	15	18	20	5	8	28	40.5	M5 x 0.8	12.5	9.5	10 <sup>0</sup> <sub>-0.022</sub>	M10 x 1	52.5	96.5 (97.5)	61	105 (106)	73	117 (118)	85	129 (130)

## Single Acting, Spring Return/Axial Foot Type (L)

CVJ3L **Bore size** - **Stroke** S

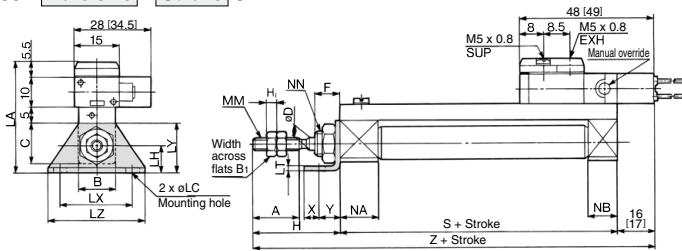

### Rod End Nut


Bore size (mm)	B <sub>1</sub>	H <sub>1</sub>
10	7	3.2
16	8	4

\* [ ]: Denotes the values of AC.

Bore size	A	B	C	D	F	H	LA	LB	LC	LH	LT	LX	LY	LZ	MM	NA	NB	NN	X	Y	5 to 15 st		16 to 30 st		31 to 45 st		46 to 60 st	
																					S	Z	S	Z	S	Z	S	Z
10	15	12	14	4	8	28	37.5	15	4.5	9	1.6	24	16.5	32	M4 x 0.7	12.5	9.5	M8 x 1	5	7	52.5	96.5 (97.5)	60	104 (105)	72	116 (117)	84	128 (129)
16	15	18	20	5	8	28	45.5	23	5.5	14	2.3	33	25	42	M5 x 0.8	12.5	9.5	M10 x 1	6	9	52.5	96.5 (97.5)	61	105 (106)	73	117 (118)	85	129 (130)

## Single Acting, Spring Return/Rod Side Flange Type (F)

CVJ3F **Bore size** - **Stroke** S

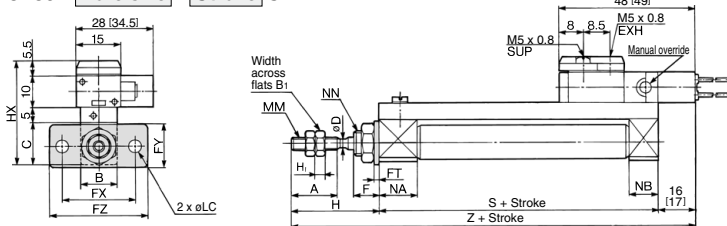

### Rod End Nut


Bore size (mm)	B <sub>1</sub>	H <sub>1</sub>
10	7	3.2
16	8	4

\* [ ]: Denotes the values of AC.

Bore size	A	B	C	D	F	FC	FT	FX	FY	FZ	H	HX	MM	NA	NB	NN	5 to 15 st		16 to 30 st		31 to 45 st		46 to 60 st	
																	S	Z	S	Z	S	Z	S	Z
10	15	12	14	4	8	4.5	1.6	24	14	32	28	34.5	M4 x 0.7	12.5	9.5	M8 x 1	52.5	96.5 (97.5)	60	104 (105)	72	116 (117)	84	128 (129)
16	15	18	20	5	8	5.5	2.3	33	20	42	28	40.5	M5 x 0.8	12.5	9.5	M10 x 1	52.5	96.5 (97.5)	61	105 (106)	73	117 (118)	85	129 (130)

**Single Acting, Spring Extend/Basic Type (B)**

CVJ3B **Bore size** - **Stroke** T

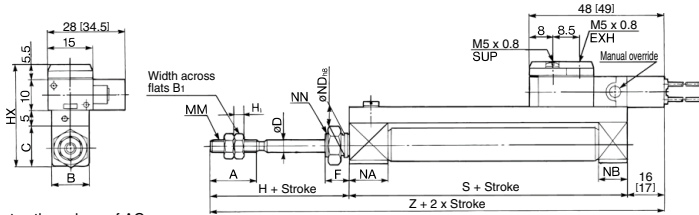

**Rod End Nut**


Bore size (mm)	B <sub>1</sub>	H <sub>1</sub>
10	7	3.2
16	8	4

\* [ ]: Denotes the values of AC.

Bore size	A	B	C	D	F	H	HX	MM	NA	NB	ND	NN	5 to 15 st		16 to 30 st		31 to 45 st		46 to 60 st	
													S	Z	S	Z	S	Z	S	Z
10	15	12	14	4	8	28	34.5	M4 x 0.7	12.5	9.5	8 <sup>0</sup> <sub>-0.022</sub>	M8 x 1	52.5	96.5 [97.5]	60	104 [105]	72	116 [117]	84	128 [129]
16	15	18	20	5	8	28	40.5	M5 x 0.8	12.5	9.5	10 <sup>0</sup> <sub>-0.022</sub>	M10 x 1	52.5	96.5 [97.5]	61	105 [106]	73	117 [118]	85	129 [130]

**Single Acting, Spring Extend/Axial Foot Type (L)**

CVJ3L **Bore size** - **Stroke** T

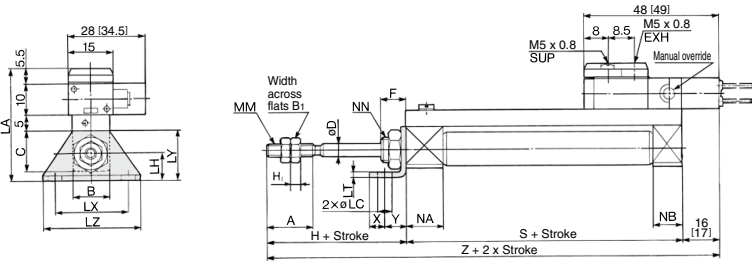

**Rod End Nut**


Bore size (mm)	B <sub>1</sub>	H <sub>1</sub>
10	7	3.2
16	8	4

\* [ ]: Denotes the values of AC.

Bore size	A	B	C	D	F	H	LA	LB	LC	LH	LT	LX	LY	LZ	MM	NA	NB	NN	X	Y	5 to 15 st		16 to 30 st		31 to 45 st		46 to 60 st	
																					S	Z	S	Z	S	Z	S	Z
10	15	12	14	4	8	28	37.5	15	4.5	9	1.6	24	16.5	32	M4 x 0.7	12.5	9.5	M8 x 1	5	7	52.5	96.5 [97.5]	60	104 [105]	72	116 [117]	84	128 [129]
16	15	18	20	5	8	28	45.5	23	5.5	14	2.3	33	25	42	M5 x 0.8	12.5	9.5	M10 x 1	6	9	52.5	96.5 [97.5]	61	105 [106]	73	117 [118]	85	129 [130]

**Single Acting, Spring Extend/Rod Side Flange Type (F)**

CVJ3F **Bore size** - **Stroke** T

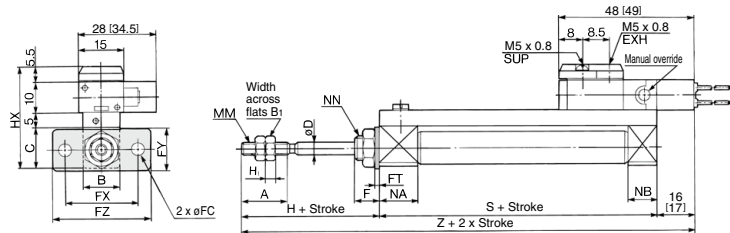

**Rod End Nut**

Bore size (mm)	B <sub>1</sub>	H <sub>1</sub>
10	7	3.2
16	8	4

\* [ ]: Denotes the values of AC.

Bore size	A	B	C	D	F	FC	FT	FX	FY	FZ	H	HX	MM	NA	NB	NN	5 to 15 st		16 to 30 st		31 to 45 st		46 to 60 st	
																	S	Z	S	Z	S	Z	S	Z
10	15	12	14	4	8	4.5	1.6	24	14	32	28	34.5	M4 x 0.7	12.5	9.5	M8 x 1	52.5	96.5 [97.5]	60	104 [105]	72	116 [117]	84	128 [129]
16	15	18	20	5	8	5.5	2.3	33	20	42	28	40.5	M5 x 0.8	12.5	9.5	M10 x 1	52.5	96.5 [97.5]	61	105 [106]	73	117 [118]	85	129 [130]

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□


-X□

# Auto Switch Mounting 1

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height


### Reed auto switch <Band mounting>

#### D-A9□




( ) : For D-A96 type  
A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.

#### D-C7□/C80




#### D-C73C□/C80C




### <Rail mounting>

#### D-A9□

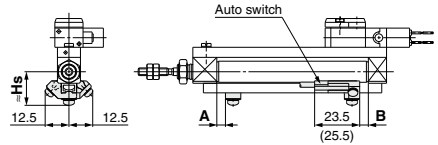


( ) : For D-A93 type


#### D-A9□V

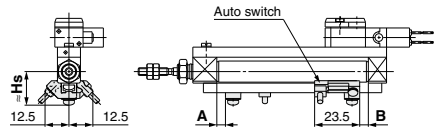


#### D-A7□/A80

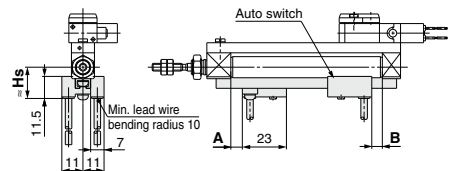


#### D-A7□H/A80H

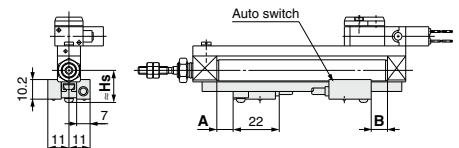

#### D-A73C/A80C

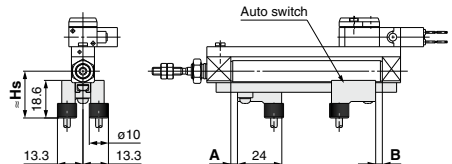

#### D-A79W

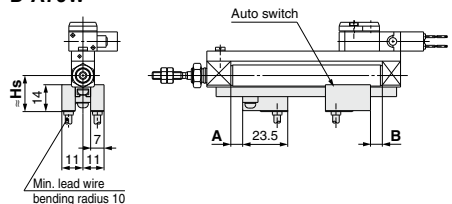


**Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height**

**Solid state auto switch**

<Band mounting>


D-M9□

D-M9□W




D-H7□

D-H7□W




D-H7C



<Rail mounting>


D-M9□

D-M9□W



D-M9□V


D-M9□WV

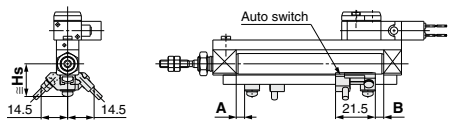


D-F7□/J79

D-F7□W/J79W

D-F79F

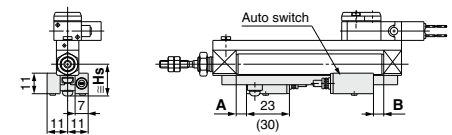


D-F7□V/F7□WV

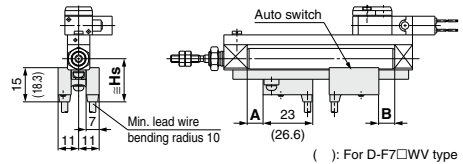

( ) : For D-F7□WV type

D-J79C

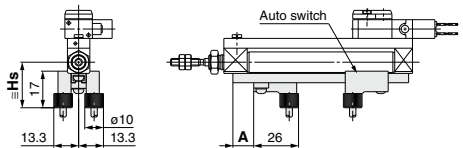

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

-X□

# Auto Switch Mounting 2

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height: Single Acting, Spring Return (S) / Spring Extend (T)

### Auto Switch Proper Mounting Position / Spring Return (S) (mm)

Auto switch model	Bore size (mm)	Dimension A				B	
		10 to 15 <sup>st</sup>	16 to 30 <sup>st</sup>	31 to 45 <sup>st</sup>	46 to 60 <sup>st</sup>		
Band mounting	D-A9□(V)	10	8.5	16	28	40	2
		16	8	16.5	28.5	40.5	2.5
	D-M9□(V) D-M9□W(V) D-M9□A(V)	10	12.5	20	32	44	6
		16	12	20.5	32.5	44.5	6.5
	D-C7□/C80 D-C73C/C80C	10	9	16.5	28.5	40.5	2.5
		16	8.5	17	29	41	3
D-H7□/H7C D-H7□W D-H7NF	10	8	15.5	27.5	39.5	1.5	
	16	7.5	16	28	40	2	
	10	7	14.5	26.5	38.5	0.5	
Rail mounting	D-A9□ D-A9□V	16	6.5	15	27	39	1
		10	11	18.5	30.5	42.5	4.5
	D-M9□/M9□V D-M9□W/M9□WV	16	10.5	19	31	43	5
		10	9.5	17	29	41	3
	D-A7□ D-A80	16	9	17.5	29.5	41.5	3.5
		10	10	17.5	29.5	41.5	3.5
	D-A7□H/A80H D-A73C/A80C D-F7□/J79 D-F7□W/J79W D-F7□V/F7□WV D-F79F/J79C	10	10	17.5	29.5	41.5	3.5
			16	9.5	18	30	42
		10	15	22.5	34.5	46.5	8.5
			16	14.5	23	35	47
	D-A79W	10	7	14.5	26.5	38.5	0.5
		16	6.5	15	27	39	1

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

### Auto Switch Proper Mounting Position / Spring Extend (T) (mm)

Auto switch model	Bore size (mm)	A	Dimension B				
			10 to 15 <sup>st</sup>	16 to 30 <sup>st</sup>	31 to 45 <sup>st</sup>	46 to 60 <sup>st</sup>	
Band mounting	D-A9□(V)	10	2	8.5	16	28	40
		16	2.5	8	16.5	28.5	40.5
	D-M9□(V) D-M9□W(V) D-M9□A(V)	10	6	12.5	20	32	44
		16	6.5	12	20.5	32.5	44.5
	D-C7□/C80 D-C73C/C80C	10	2.5	9	16.5	28.5	40.5
		16	3	8.5	17	29	41
D-H7□/H7C D-H7□W D-H7NF	10	1.5	8	15.5	27.5	39.5	
	16	2	7.5	16	28	40	
	10	0.5	7	14.5	16.5	38.5	
Rail mounting	D-A9□ D-A9□V	16	1	6.5	15	27	39
		10	4.5	11	18.5	30.5	42.5
	D-M9□/M9□V D-M9□W/M9□WV	16	5	10.5	19	31	43
		10	3	9.5	17	29	41
	D-A7□ D-A80	16	3.5	9	17.5	29.5	41.5
		10	3.5	10	17.5	29.5	41.5
	D-A7□H/A80H D-A73C/A80C D-F7□/J79 D-F7□W/J79W D-F7□V/F7□WV D-F79F/J79C	10	3.5	10	17.5	29.5	41.5
			16	4	9.5	18	30
		10	8.5	15	22.5	34.5	46.5
			16	9	14.5	23	35
	D-A79W	10	0.5	7	14.5	26.5	38.5
		16	1	6.5	15	27	39

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

### Auto Switch Mounting Height (mm)



Auto switch model	Band mounting					Rail mounting						
	D-A9□ D-M9□ D-M9□W D-M9□A	D-M9□V D-M9□WV D-A9□AV D-A9□V	D-C7□/C80 D-H7□ D-H7□W D-H7NF	D-C73C D-C80C	D-H7C	D-A9□A9□V D-M9□ D-M9□V D-M9□W D-M9□WV	D-A7□ D-A80	D-A7□H/A80H D-F7□/J79 D-F7□W/J79W D-F79F D-F7NT	D-A73C D-A80C	D-F7□V D-F7□WV	D-J79C	D-A79W
Bore size (mm)	Hs	Hs	Hs	Hs	Hs	Hs	Hs	Hs	Hs	Hs	Hs	Hs
10	17	18	17	19.5	20	17.5	16.5	17.5	23.5	20	23	19
16	20.5	21	20.5	23	23.5	21	19.5	20.5	26.5	23	26	22

**Minimum Auto Switch Mounting Stroke**


Auto switch mounting	Auto switch model	No. of auto switches mounted				
		1	n (n: No. of auto switches)			
			Different surfaces	Same surface	Different surfaces	Same surface
Band mounting	D-M9□/M9□W D-A9□/M9□A	10	15 <small>Note 1)</small>	45 <small>Note 1)</small>	$15 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	45 + 15 (n-2) <small>(n = 2, 3, 4, 5...)</small>
	D-M9□V	5	15 <small>Note 1)</small>	35	$15 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	35 + 25 (n-2) <small>(n = 2, 3, 4, 5...)</small>
	D-M9□WV D-M9□AV	10	15 <small>Note 1)</small>	35	$15 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	35 + 25 (n-2) <small>(n = 2, 3, 4, 5...)</small>
	D-A9□V	5	10	35	$10 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	35 + 25 (n-2) <small>(n = 2, 3, 4, 5...)</small>
	D-C7□ D-C80	10	15	50	$15 + 40 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	50 + 20 (n-2) <small>(n = 2, 3, 4, 5...)</small>
	D-H7□ D-H7□W D-H7NF	10	15	60	$15 + 45 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	60 + 22.5 (n-2) <small>(n = 2, 3, 4, 5...)</small>
	D-C73C D-C80C D-H7C	10	15	65 <small>Note 2)</small>	$15 + 50 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 4)</small>	50 + 27.5 (n-2) <small>(n = 2, 3, 4, 5...)</small>
Rail mounting	D-M9□V	5	—	5	—	10 + 10 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-A9□V	5	—	10	—	10 + 15 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-M9□ D-A9□	10	—	10	—	15 + 15 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-M9□WV D-M9□AV	10	—	15	—	15 + 15 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-M9□W	15	—	15	—	20 + 15 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-M9□A	15	—	20	—	20 + 15 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-A7□/A80 D-A7□H/A80H D-A73C/A80C	5	—	10	—	15 + 10 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-A7□H D-A80H	5	—	10	—	15 + 15 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-A79W	10	—	15	—	10 + 15 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-F7□ D-J79	5	—	5	—	15 + 15 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-F7□V D-J79C	5	—	5	—	10 + 10 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-F7□W/J79W D-F79F/F7NT	10	—	15	—	15 + 20 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>
	D-F7□WV	10	—	15	—	10 + 15 (n-2) <small>(n = 4, 6...)</small> <small>Note 5)</small>

Note 4) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.  
 Note 5) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.  
 However, the minimum even number is 4. So, 4 is used for the calculation when "n" is 1 to 3.

Note 1) Auto switch mounting (The adjustment as shown in the figures below is required with the following stroke ranges.)

Auto switch model	With 2 auto switches	
	Different surfaces <small>Note 1)</small>	Same surface <small>Note 1)</small>
	 <p>Auto switch D-M9□(V) D-M9□W(V) D-M9□A(V)</p> <p>The proper auto switch mounting position is 5.5 mm inward from the switch holder edge.</p>	 <p>The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with each other.</p>
D-A93	—	45 to less than 50 stroke
D-M9□ D-M9□W	15 to less than 20 stroke	45 to less than 55 stroke

Note 2) For the CDVJ3 series, note that 65 strokes cannot be manufactured.  
 Note 3) The dimension stated in ( ) shows the minimum stroke for the auto switch mounting when the auto switch does not project from the end surface of the cylinder body and hinder the lead wire bending space. (Refer to the figure below.)  
 These contents apply to the rail mounting with one or two auto switches.



CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

-X□



## Operating Range

Auto switch model	Bore size (mm)	
	10	16
<b>Band mounting</b>		
D-A9□(V)	6	7
D-M9□(V)		
D-M9□W(V)/M9□A(V)	2.5	3
D-C7□/C80/C73C/C80C	7	7
D-H7□/H7□W/H7NF	4	4
D-H7C	8	9

\* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approximately ±30% dispersion). It may vary substantially depending on an ambient environment.

Auto switch model	Bore size (mm)	
	10	16
<b>Rail mounting</b>		
D-A9□/A9□V	6	6.5
D-M9□/M9□V		
D-M9□W/M9□WV	3	3.5
D-M9□A/M9□AV		
D-A7□/A80/A7H/A80H/A73C/A80C	8	9
D-A79W	11	13
D-F7□/J79/F7□W/J79W		
D-F7□V/F7□WV/F79F/J79C	5	5
D-F7NT		

## Auto Switch Mounting Bracket: Part No.

Auto switch mounting	Auto switch model	Bore size (mm)	
		ø10	ø16
Band mounting	D-M9□ D-M9□V D-M9□W D-M9□WV D-A9□ D-A9□V	BJ6-010 <small>Note 1)</small>	BJ6-016 <small>Note 1)</small>
	D-M9□A D-M9□AV	BJ6-010S <small>Note 2)</small>	BJ6-016S <small>Note 2)</small>
Rail mounting	D-C7□/C80 D-C73C/C80C D-H7□/H7□W D-H7NF	BJ2-010	BJ2-016
	D-A9□ D-A9□V D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□A D-M9□AV	BQ2-012 <small>Note 5)</small>	BQ2-012 <small>Note 5)</small>

(1) BJ2-□□□ is a set of "a" and "b".  
 (2) BJ□-1 is a set of "c" and "d".  
 BJ4-1 (Switch bracket: White)  
 BJ5-1 (Switch bracket: Transparent)

**Note 1)** Set part number which includes the auto switch mounting band (BJ2-□□□) and the holder kit (BJ5-1/Switch bracket: Transparent). Since the switch bracket (made from nylon) are affected in an environment where alcohol, chloroform, methylamines, hydrochloric acid or sulfuric acid is splashed over, so it cannot be used. Please consult SMC regarding other chemicals.

**Note 2)** Set part number which includes the auto switch mounting band (BJ2-□□□S) and the holder kit (BJ4-1/Switch bracket: White).

**Note 3)** For the D-M9□A (V) type auto switch, do not install the switch bracket on the indicator light.

**Note 4)** Only auto switches are assembled when cylinders are shipped.

**Note 5)** When a compact auto switch is mounted on the rail mounting type, the auto switch mounting brackets on the left are required. Order them separately from cylinders.

Example order: CDJ2B10-60-A ..... 1 unit  
 D-M9BWV ..... 2 pcs.  
 BQ2-012 ..... 2 pcs.

**Besides the models listed in How to Order, the following auto switches are applicable. Refer to pages 941 to 1067 for detailed specifications.**

Auto switch type	Part no.	Electrical entry (Fetching direction)	Features
Reed	D-C73, C76	Grommet (In-let)	—
	D-C80		Without indicator light
Solid state	D-H7A1, H7A2, H7B		—
	D-H7NW, H7PW, H7BW		Diagnostic indication (2-color)

\* For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1014 and 1015 for details.

\* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H types) are also available. Refer to page 959 for details.

# Valve Mounted Cylinder

## Double Acting, Single Rod

# CVM5 Series

ø20, ø25, ø32, ø40

### How to Order

**Bore size**

20	20 mm
25	25 mm
32	32 mm
40	40 mm

**Mounting type**

B	Basic type
L	Axial foot type
F	Rod side flange type
G	Head side flange type
C	Single clevis type
D	Double clevis type
T	Head side trunnion type
U	Rod side trunnion type

**Solenoid valve voltage**

Standard		Option	
1	100 VAC (50/60Hz)	3	110 VAC (50/60Hz)
2	200 VAC (50/60Hz)	4	220 VAC (50/60Hz)
5	24 VDC	6	12 VDC

For other rated voltages, please consult with SMC.

**Solenoid valve**

1	2 position single
2	2 position double
3	3 position closed center (Option)
4	3 position exhaust center (Option)

**Electrical entry**

G	Grommet
L	L plug connector
M	M plug connector
D	DIN terminal

**Light/Surge voltage suppressor**

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor (Except Type G)

**Made to Order**  
Refer to page 772 for details.

**Port thread type**

Nil	Rc
TN	NPT
TF	G

**Piping**

Nil	Screw-in type
F	Built-in One-touch fitting

**Cylinder stroke (mm)**  
(Refer to "Standard Stroke" on page 772.)

**Rod extended/retracted when energized**

Nil	Rod extended when energized
B	Rod retracted when energized

\* Only in case of 2 position single solenoid valve.

**Suffix for cylinder**

Nil	None
J	Nylon tarpaulin
K	Heat resistant tarpaulin

**Built-in Magnet Cylinder Model**  
If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDVM5B25-150-25GS

**Auto switch**

Nil	Without auto switch
-----	---------------------

\* For the applicable auto switch model, refer to the table below.

**Auto switch mounting bracket**  
(Note)  
This symbol is indicated when the D-A9□ or M9□ type auto switch is specified. This mounting bracket does not apply to other auto switches (D-C7□ and H7□, etc.) (Nil)

**Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

**Ordering Example:**  
CVM5 L 32 [ ] [ ] - 100 [ ] [ ] - 1 1 M Z - [ ]  
With auto switch CDVM5 L 32 [ ] [ ] - 100 [ ] [ ] - 1 1 M Z - M9BW - C - [ ]  
With auto switch (Built-in magnet)

### Applicable Auto Switches

Refer to pages 941 to 1067 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model					Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	Lead wire length (m)					None (N)	
									0.5 (Nil)	1 (M)	3 (L)				5 (Z)
Solid state auto switch		Grommet		3-wire (NPN)	24 V	5 V, 12 V	M9NV	M9N	●	●	●	○	○	IC circuit	
				3-wire (PNP)			M9PV	M9P	●	●	●	○	○		
		Connector	2-wire	M9BV	M9B	●	●	●	○	○					
				H7C	●	—	●	●	—	—					
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	M9NWV	M9NW	●	●	●	○	○	IC circuit	
				3-wire (PNP)			M9PWV	M9PW	●	●	●	○	○		
	Water resistant (2-color indicator)	Grommet		2-wire	24 V	12 V	M9BWW	M9WB	●	●	●	○	○	—	
				3-wire (NPN)			M9NAV*1	M9NA*1	○	○	○	○	○		
	With diagnostic output (2-color indicator)	Grommet		3-wire (PNP)	24 V	12 V	M9PAV*1	M9PA*1	○	○	○	○	○	IC circuit	
				2-wire			M9BAV*1	M9BA*1	○	○	○	○	○		
Reed auto switch		Grommet	Yes	3-wire (NPN equivalent)	24 V	5 V	A96V	A96	●	●	●	—	—	IC circuit	
							A93V*2	A93	●	●	●	—	—		
							A90V	A90	●	●	●	—	—		
							B54	B54	●	—	●	—	—		
							B64	B64	●	—	●	—	—		
		Connector	Yes		2-wire	24 V	12 V	C73C	C73C	●	—	●	—	—	—
								C80C	C80C	●	—	●	—	—	
		Grommet	Yes		2-wire	24 V	24 V or less	C80C	C80C	●	—	●	—	—	IC circuit
								B59W	B59W	●	—	●	—	—	
										●	—	●	—	—	

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
1 m ..... M (Example) M9NWV  
3 m ..... L (Example) M9NWL  
5 m ..... Z (Example) M9NWZ  
None ..... N (Example) H7CN

\* Solid state auto switches marked with "○" are produced upon receipt of order.  
\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.  
\*2 1 m type lead wire is only applicable to D-A93.

\* Since there are other applicable auto switches than listed, refer to page 789 for details.  
\* For details about auto switches with pre-wired connector, refer to pages 1014 and 1015.  
\* D-A9□/M9□ auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled before shipped.)

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

X-□

# CVM5 Series

Operation type can be changed to rod extended when energized or rod retracted when energized.

An auto switch cylinder with the switch installed can also be manufactured.



## Specifications

Applicable bore size (mm)		20	25	32	40
Fluid		Air			
Action		Double acting, Single rod			
Cushion		Rubber bumper			
Proof pressure		1.0 MPa			
Maximum operating pressure		0.7 MPa			
Minimum operating pressure		0.15 MPa			
Ambient and fluid temperature		-10 to 50°C (No freezing)			
Lubrication		Not required (Non-lube)			
Stroke length tolerance		+1.4 0			
Port size	Screw-in type	Rc 1/8			
	Built-in One-touch fitting	O.D.: ø6/I.D.: ø4			
Piston speed (mm/s) <sup>(Note)</sup>		50 to 700*	50 to 650*	50 to 590*	50 to 420*
Allowable kinetic energy		0.27 J	0.4 J	0.65 J	1.2 J
Mounting		Basic type, Axial foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Head side trunnion type, Rod side trunnion type			

Note) The figures marked with "\*" represent the values of the cylinder with the silencer type exhaust throttle valve removed. To operate the cylinder at these values, prevent dust from entering by installing an AN120-M5 silencer on the EXH port.

## Solenoid Valve Specifications

Applicable solenoid valve model		VZ3□90 series	
Coil rated voltage		Standard: 100/200 VAC (50/60 Hz), 24 VDC Semi-standard: 110/220 VAC, 12 VDC	
Effective area of valve (Cv factor)		4.5mm <sup>2</sup> (0.25)	
Allowable voltage		-15 to 10%	
Coil insulation		Class B or equivalent (130°C)	
Electrical entry		Grommet, L plug connector, M plug connector, DIN terminal	
Power consumption (W) <sup>(Note)</sup>	DC	1.8 (With indicator light: 2.1)	
Apparent power (VA) <sup>(Note)</sup>	AC	Inrush	4.5/50 Hz, 4.2/60 Hz
		Holding	3.5/50 Hz, 3.0/60 Hz

Note) At the rated voltage.



**Made to Order Specifications**  
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC4	With heavy duty scraper
-XC6	Made of stainless steel
-XC29	Double knuckle joint with spring pin
-XC52	Mounting nut with set screw

Refer to pages 787 to 789 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Auto switch mounting bracket: Part no.

## Standard Stroke

Bore size (mm)	Standard stroke (mm) <sup>(Note)</sup>	Maximum stroke (mm)
20	25, 50, 75, 100, 125, 150, 200, 250, 300	1000
25		
32		
40		

Note 1) Other intermediate strokes can be manufactured upon receipt of order. When exceeding 300 stroke, the allowable maximum stroke length is determined by the stroke selection table.

Note 2) Applicable strokes should be confirmed according to the usage. For details, refer to the CM2 series of the "Air Cylinders Model Selection" on front matter pages of the Best Pneumatics No. 2-1. In addition, the products that exceed the standard stroke might not be able to fulfill the specifications due to the deflection etc.

## Rod Boot Material

Symbol	Rod boot material	Maximum ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C*

\* Maximum ambient temperature for the rod boot itself.

## Weight

(kg)

Bore size (mm)		20	25	32	40
Basic Weight	Basic type	0.25	0.32	0.39	0.67
	Axial foot type	0.40	0.48	0.55	0.94
	Flange type	0.31	0.41	0.48	0.79
	Single clevis type	0.29	0.36	0.43	0.76
	Double clevis type	0.30	0.38	0.44	0.80
	Trunnion type	0.29	0.39	0.45	0.77
Additional weight per each 50 mm of stroke		0.05	0.07	0.09	0.14
Option bracket	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (With pin)	0.07	0.07	0.07	0.20

Calculation: (Example) **CVM5L32-100-11G**

- Basic weight ..... 0.55 (kg) (Axial foot type ø32)
- Additional weight ..... 0.09/50 (kg/50 st)
- Cylinder stroke ..... 100 (st)
- 0.55 + 0.09 x 100/50 = 0.73 kg

## Mounting Type and Accessory

Mounting	Accessory			Option			
	Standard equipment	Option			Option		
	Mounting nut	Rod end nut	Clevis pin	Single knuckle joint	Double knuckle joint <sup>(3)</sup>	Pivot bracket <sup>(5)</sup>	Pivot bracket pin <sup>(6)</sup>
Basic type	● (1 pc.)	●	—	●	●		
Axial foot type	● (2)	●	—	●	●		
Rod side flange type	● (1)	●	—	●	●	—	—
Head side flange type	● (1)	●	—	●	●		
Single clevis type	— <sup>(1)</sup>	●	—	●	●	●	●
Double clevis type <sup>(3)</sup>	— <sup>(1)</sup>	●	● <sup>(4)</sup>	●	●	—	—
Head side trunnion type	● (1) <sup>(2)</sup>	●	—	●	●	●	—
Rod side trunnion type	● (1) <sup>(2)</sup>	●	—	●	●		

- Note 1) Mounting nut is not equipped with single clevis type and double clevis type  
 Note 2) Trunnion nuts are equipped for head side trunnion and rod side trunnion.  
 Note 3) Pin and set ring are shipped together with double clevis and double knuckle joint.  
 Note 4) Retaining rings (cotter pins for ø40) are included in clevis pins.  
 Note 5) Pin and retaining ring are not included in pivot bracket.  
 Note 6) Retaining rings are included in pivot bracket pin.

## Mounting Bracket Part No.

Bore size (mm)	20	25	32	40
Axial foot*	CM-L020B		CM-L032B	CM-L040B
Flange	CM-F020B		CM-F032B	CM-F040B
Single clevis	CM-C020B		CM-C032B	CM-C040B
Double clevis**	CM-D020B		CM-D032B	CM-D040B
Trunnion (With nut)	CM-T020B		CM-T032B	CM-T040B

- \* Two foot brackets and a mounting nut are attached.  
 When ordering the foot bracket, order 2 pcs. per cylinder.  
 \*\* Clevis pin and retaining ring (cotter pin for ø40) are packaged together.

## Accessory (Option)

Refer to page 786 for part numbers and dimensions of the single knuckle joint, double knuckle joint, clevis pin, knuckle pin, rod end nut, mounting nut, and trunnion nut.

## ⚠️ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, pages 3 to 12 for Actuator and Auto Switch Precautions, and 3/4/5 Port Solenoid Valve Precautions in Best Pneumatics No. 1-1.

## Mounting

### ⚠️ Warning

1. Do not rotate the cover.

If a cover is rotated when installing a cylinder or screwing a fitting into the port, it is likely to damage the junction part with cover.

### ⚠️ Caution

1. Not able to disassemble.

Cover and cylinder tube are connected to each other by caulking method, thus making it impossible to disassemble. Therefore, internal parts of a cylinder other than rod seal are not replaceable.

2. Use caution to the popping of a retaining ring.

When replacing rod seals and removing and mounting a retaining ring, use a proper tool (retaining ring plier: tool for installing type C retaining ring). Even if a proper tool is used, it is likely to inflict damage to a human body or peripheral equipment, as a retaining ring may be flown out of the tip of a plier. Be much careful with the popping of a retaining ring. Besides, be certain that a retaining ring is placed firmly into the groove of rod cover before supplying air at the time of installment.

3. Do not touch the cylinder during operation.

Use caution when handling a cylinder, which is running at a high speed and a high frequency, because the surface of a cylinder tube could get so hot enough as to cause you get burns.

4. Do not use an air cylinder as an air-hydro cylinder.

If it uses turbine oil in place of fluids for cylinder, it may result in oil leakage.

5. Conjoin the rod end part, so that rod boot might not be twisted.

If a rod boot is installed with being twisted when installing a cylinder, it will cause a rod boot to fail during operation.

## Model Selection

### ⚠️ Warning

1. Confirm the specifications.

Products in this catalog are designed to be used for compressed air systems. If not operated within the designated pressure or temperature, it may damage the products or cause malfunction. (Refer to specifications.)

2. Energizing continuously for a long period of time

When the valve is continuously energized for a long period of time, the performance may deteriorate, shorten the service life or affect peripheral equipment adversely since temperature rises when coils generate heat.

CVQ

CVMQ

CVJ

CVM

CVS3

CVS1

MVGQ

D

-X

# CVM5 Series

## Built-in One-touch Fitting

CVM5 **Mounting type** **Bore size** F — For “How to Order”, refer to page 771.

● Built-in One-touch fitting

One-touch fittings are installed on cylinders.



### Application/Tubing O.D.


Bore size (mm)	20	25	32	40
Applicable tubing O.D. (mm)	ø6/4	ø6/4	ø6/4	ø6/4
Applicable tubing material	Can be used for either nylon, soft nylon or polyurethane tube.			

### Specifications

<b>Action</b>	Double acting, Single rod			
<b>Bore size (mm)</b>	20, 25, 32, 40			
<b>Maximum operating pressure</b>	0.7 MPa			
<b>Minimum operating pressure</b>	0.15 MPa			
<b>Cushion</b>	Rubber bumper			
<b>Piping</b>	Built-in One-touch fitting			
<b>Piston speed (mm/s)</b>	ø20	ø25	ø32	ø40
	50 to 700	50 to 650	50 to 590	50 to 420
<b>Mounting</b>	Basic type, Axial foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Rod side trunnion type, Head side trunnion type			

For the dimensions of mounting bracket, refer to pages 777 to 780.


### Opening Range of Throttle Valve and Driving Speed



Measuring conditions: Operating pressure 0.5 MPa  
Mounting: horizontal Load: no load on the return side  
The speeds indicated above are for reference.

### Manual Operation

Manual operation is possible by pushing the manual button indicated with the arrow.




### Piston Speed Adjustment

- To slow down the piston speed, screw in the needle of the silencer type exhaust throttle valve clockwise, which reduces the amount of air that is discharged.
- To adjust the piston extension side, regulate the “R1” side silencer type exhaust throttle valve.  
To adjust the retraction side, regulate the “R2” side silencer exhaust throttle valve.
- The needle valve of the throttle valve can be fully opened by loosening it 8 turns from the fully closed position.
- The needle valve has a loosening prevention construction.


### Changing between Rod Extended when Energized and Rod Retracted when Energized

**Step** [This procedure is for changing the rod extended when energized to the rod retracted when energized.]

1. Using a tool, loosen the two hexagon socket bolts, and remove the plate and the solenoid valve. At this time, instead of removing the plate and the solenoid valve separately, remove them together, with the hexagon socket bolts remaining inserted.




2. A sub-plate gasket is inside the sub-plate. Invert this sub-plate gasket 180° and install it with its letter “B” visible. (A portion that protrudes is provided on the periphery of the sub-plate gasket, and the letter “B” is on one side of this protrusion.)




3. Install the solenoid valve and the plate, and tighten the hexagon socket bolts with a tool. The tightening torque is between 0.6 and 0.8 N·m.

After tightening, press the manual button on the solenoid valve, check for any air leaks, and verify the operating conditions. Distinction between rod extended when energized and rod retracted when energized can be determined from the outside, by looking through the small window in the sub-plate.



**Rod extended when energized**


Convex position of sub-plate gasket




**Rod retracted when energized**

# Valve Mounted Cylinder Double Acting, Single Rod **CVM5 Series**


## Construction

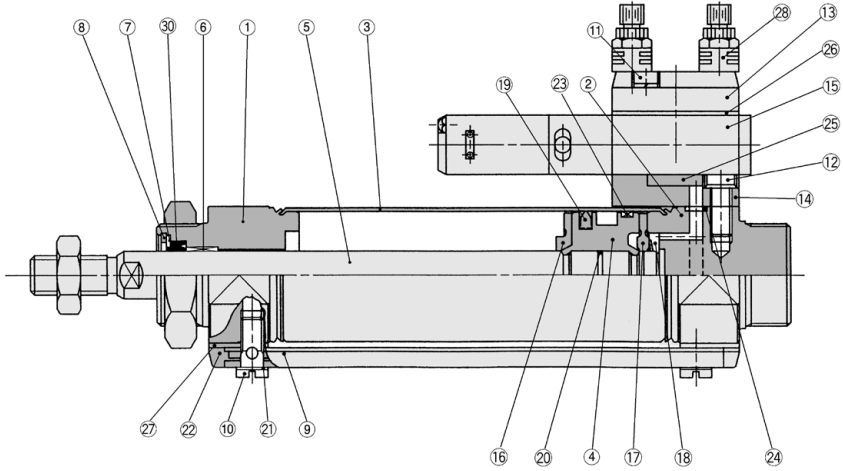

**DIN terminal**




**Built-in One-touch fitting**

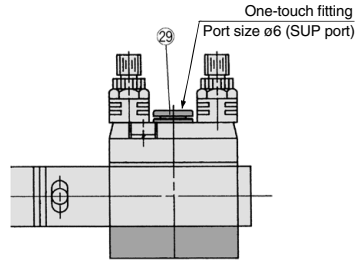

### Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear anodized
2	Head cover	Aluminum alloy	Clear anodized
3	Cylinder tube	Stainless steel	
4	Piston	Aluminum alloy	Chromated
5	Piston rod	Carbon steel	Hard chrome plated
6	Bushing	Bearing alloy	
7	Seal retainer	Stainless steel	
8	Retaining ring	Carbon tool steel	Phosphate coated
9	Pipe	Aluminum alloy	Clear anodized
10	Stud	Brass	Electroless nickel plated
11	Hex. socket head cap screw with spring washer	Carbon steel	Nickel plated
12	Hex. socket head cap screw with spring washer	Carbon steel	Nickel plated
13	Plate	Aluminum alloy	Metallic painted
14	Sub-plate	Aluminum alloy	Metallic painted
15	Solenoid valve	—	Refer to the "How to order" below.*
16	Bumper A	Urethane	
17	Bumper B	Urethane	

\* How to order solenoid valves



### Component Parts

No.	Description	Material	Note
18	Retaining ring	Stainless steel	
19	Piston seal	NBR	
20	Piston gasket	NBR	
21	Gasket	Resin	
22	Pipe gasket	Urethane rubber	
23	Wear ring	Resin	
24	Head cover gasket	NBR	
25	Sub-plate gasket	NBR	
26	Gasket	NBR	
27	Spacer gasket	Resin	Except ø25
28	Exhaust throttle with silencer	—	ASN2-M5
29	One-touch fitting	—	Port size: ø6

### Replacement Parts/Seal Kit

No.	Description	Material	Part no.			
			20	25	32	40
30	Rod seal	NBR	CM220-PS	CM225-PS	CM232-PS	CM240-PS

\* Since the seal kit does not include a grease pack, order it separately.  
Grease pack part no.: GR-S-010 (10g)

CVQ

CVQM

CVJ

CVM

CV3

CVS1

MVGQ


D-

X-


# CVM5 Series

## Basic Type (B)


CVM5B  –

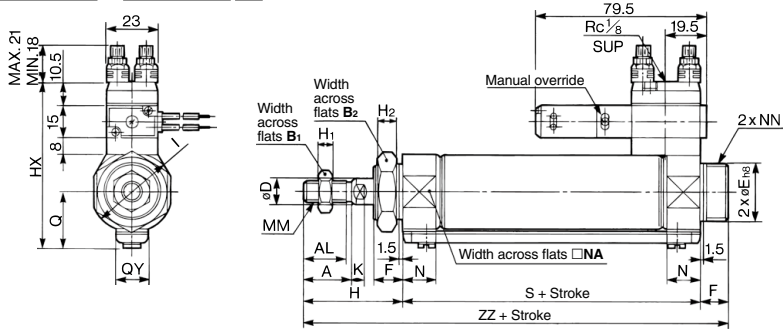

### Built-in One-touch fitting

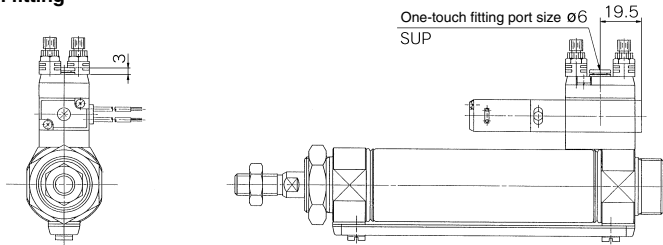

### With rod boot

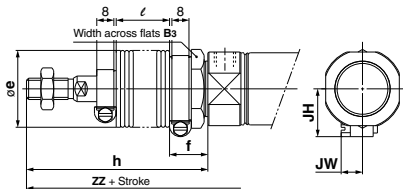

For DIN terminal and double solenoid, refer to page 780.

Bore size (mm)	Stroke range	A	AL	B <sub>1</sub>	B <sub>2</sub>	D	Eh <sub>s</sub>	F	Q	QY	H	H <sub>1</sub>	H <sub>2</sub>	HX	I	K	MM	N	NA	NN	S	ZZ
20	Up to 300	18	15.5	13	26	8	20 <sup>0/-0.033</sup>	13	19.8	14	41	5	8	65.3	28	5	M8 x 1.25	15	24	M20 x 1.5	62	116
25	Up to 300	22	19.5	17	32	10	26 <sup>0/-0.033</sup>	13	22	14	45	6	8	70.5	33.5	5.5	M10 x 1.25	15	30	M26 x 1.5	62	120
32	Up to 300	22	19.5	17	32	12	26 <sup>0/-0.033</sup>	13	25.8	16	45	6	8	76.5	37.5	5.5	M10 x 1.25	15	34.5	M26 x 1.5	64	122
40	Up to 300	24	21	22	41	14	32 <sup>0/-0.039</sup>	16	29.8	16	50	8	10	84.5	46.5	7	M14 x 1.5	21.5	42.5	M32 x 2	88	154

(mm)

### With Rod Boot

Bore size (mm)	B <sub>s</sub>	e	f	h																JH	JW
				1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500				
20	30	36	18	68	81	93	106	131	156	—	12.5	25	37.5	50	75	100	—	23.5	10.5		
25	32	36	18	72	85	97	110	135	160	185	12.5	25	37.5	50	75	100	125	23.5	10.5		
32	32	36	18	72	85	97	110	135	160	185	12.5	25	37.5	50	75	100	125	23.5	10.5		
40	41	46	20	77	90	102	115	140	165	190	12.5	25	37.5	50	75	100	125	27	10.5		

(mm)

Bore size (mm)	ZZ						
	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500
20	143	156	168	181	206	231	256
25	147	160	172	185	210	235	260
32	149	162	174	187	212	237	262
40	181	194	206	219	244	269	294


\* For short strokes, a solenoid valve may protrude from the rod cover end. Confirm S dimension and solenoid dimensions.

\* Long stroke type includes ones for strokes more than 301 mm.

# Valve Mounted Cylinder Double Acting, Single Rod **CVM5 Series**

## Axial Foot Type (L)

CVM5L  —

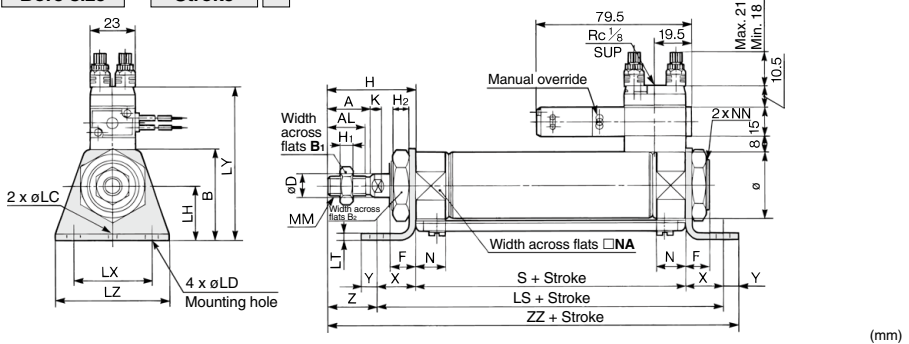


Bore size (mm)	Stroke range	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	D	F	H	H <sub>1</sub>	H <sub>2</sub>	I	K	LC	LD	LH	LS	LT	LX	LY
20	Up to 300	18	15.5	40	13	26	8	13	41	5	8	28	5	4	6.8	25	102	3.2	40	70.5
25	Up to 300	22	19.5	47	17	32	10	13	45	6	8	33.5	5.5	4	6.8	28	102	3.2	40	76.5
32	Up to 300	22	19.5	47	17	32	12	13	45	6	8	37.5	5.5	4	6.8	28	104	3.2	40	78.8
40	Up to 300	24	21	54	22	41	14	16	50	8	10	46.5	7	4	7	30	134	3.2	55	84.8

Bore size (mm)	LZ	MM	N	NA	NN	S	X	Y	Z	ZZ
20	55	M8 x 1.25	15	24	M20 x 1.5	62	20	8	21	131
25	55	M10 x 1.25	15	30	M26 x 1.5	62	20	8	25	135
32	55	M10 x 1.25	15	34.5	M26 x 1.5	64	20	8	25	137
40	75	M14 x 1.5	21.5	42.5	M32 x 2	88	23	10	27	171

\* Brackets are packaged together.

## Rod Side Flange Type (F)

CVM5F  —

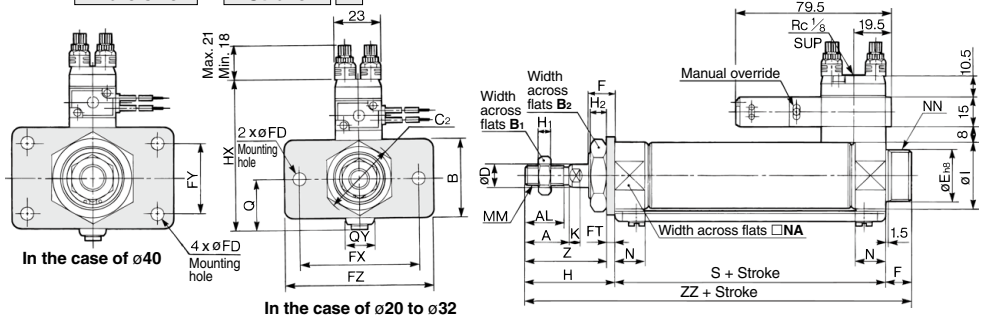

Bore size (mm)	Stroke range	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	C <sub>2</sub>	D	Eh <sub>8</sub>	F	FD	FT	FX	FY	FZ	H	H <sub>1</sub>	H <sub>2</sub>	HX
20	Up to 300	18	15.5	34	13	26	30	8	20 <sup>0.033</sup>	13	7	4	60	—	75	41	5	8	65.3
25	Up to 300	22	19.5	40	17	32	37	10	26 <sup>0.033</sup>	13	7	4	60	—	75	45	6	8	70.5
32	Up to 300	22	19.5	40	17	32	37	12	26 <sup>0.033</sup>	13	7	4	60	—	75	45	6	8	76.5
40	Up to 300	24	21	52	22	41	47.3	14	32 <sup>0.039</sup>	16	7	5	66	36	82	50	8	10	84.5

Bore size (mm)	I	K	MM	N	NA	NN	Q	QY	S	Z	ZZ
20	28	5	M8 x 1.25	15	24	M20 x 1.5	19.8	14	62	37	116
25	33.5	5.5	M10 x 1.25	15	30	M26 x 1.5	22	14	62	41	120
32	37.5	5.5	M10 x 1.25	15	34.5	M26 x 1.5	25.8	16	64	41	122
40	46.5	7	M14 x 1.5	21.5	42.5	M32 x 2	29.8	16	88	45	154

\* For short strokes, a solenoid valve may protrude from the rod cover end. Confirm S dimension and solenoid dimensions.  
\* Brackets are packaged together.

**CVQ**

**CVQM**

**CVJ**

**CVM**

**CV3**

**CVS1**

**MVGQ**

**D**


**X**



# CVM5 Series

## Head Side Flange Type (G)

CVM5G  —

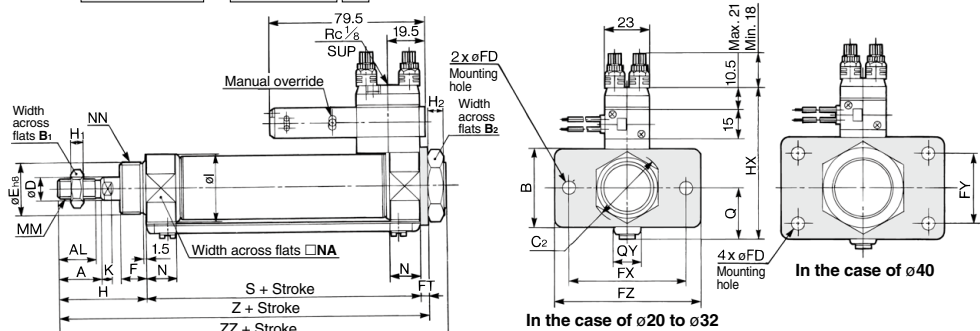


Bore size (mm)	Stroke range	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	C <sub>2</sub>	D	Eh <sub>8</sub>	F	FD	FT	FX	FY	FZ	H	H <sub>1</sub>	H <sub>2</sub>	HX
20	Up to 300	18	15.5	34	13	26	30	8	20 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	41	5	8	65.3
25	Up to 300	22	19.5	40	17	32	37	10	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	45	6	8	70.5
32	Up to 300	22	19.5	40	17	32	37	12	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	45	6	8	76.5
40	Up to 300	24	21	52	22	41	47.3	14	32 <sup>0</sup> <sub>-0.039</sub>	16	7	5	66	36	82	50	8	10	84.5

Bore size (mm)	I	K	MM	N	NA	NN	Q	QY	S	Z	ZZ
20	28	5	M8 x 1.25	15	24	M20 x 1.5	19.8	14	62	107	116
25	33.5	5.5	M10 x 1.25	15	30	M26 x 1.5	22	14	62	111	120
32	37.5	5.5	M10 x 1.25	15	34.5	M26 x 1.5	25.8	16	64	113	122
40	46.5	7	M14 x 1.5	21.5	42.5	M32 x 2	29.8	16	88	143	154

\* Brackets are packaged together.

## Single Clevis Type (C)

CVM5C  —

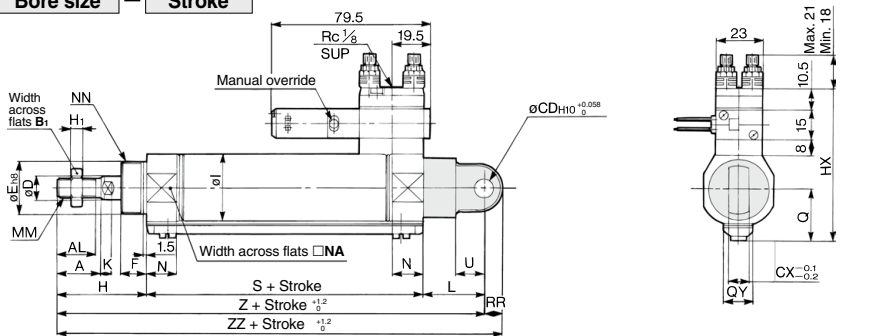


Bore size (mm)	Stroke range	A	AL	B <sub>1</sub>	CD	CX	D	Eh <sub>8</sub>	F	H	H <sub>1</sub>	I	HX	K	L	MM	N	NA
20	Up to 300	18	15.5	13	9	10	8	20 <sup>0</sup> <sub>-0.033</sub>	13	41	5	28	65.3	5	30	M8 x 1.25	15	24
25	Up to 300	22	19.5	17	9	10	10	26 <sup>0</sup> <sub>-0.033</sub>	13	45	6	33.5	70.5	5.5	30	M10 x 1.25	15	30
32	Up to 300	22	19.5	17	9	10	12	26 <sup>0</sup> <sub>-0.033</sub>	13	45	6	37.5	76.5	5.5	30	M10 x 1.25	15	34.5
40	Up to 300	24	21	22	10	15	14	32 <sup>0</sup> <sub>-0.039</sub>	16	50	8	46.5	84.5	7	39	M14 x 1.5	21.5	42.5

Bore size (mm)	NN	Q	QY	RR	S	U	Z	ZZ
20	M20 x 1.5	19.8	14	9	62	14	133	142
25	M26 x 1.5	22	14	9	62	14	137	146
32	M26 x 1.5	25.8	16	9	64	14	139	148
40	M32 x 2	29.8	16	11	88	18	177	188

**Double Clevis Type (D)**

CVM5D  -

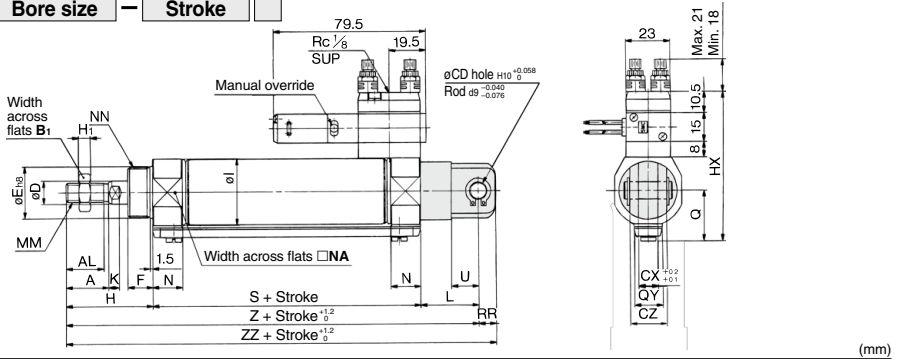


Bore size (mm)	Stroke range	A	AL	B <sub>1</sub>	CD	CX	CZ	D	Eh <sub>8</sub>	F	H	H <sub>1</sub>	HX	I	K	L	MM	N	NA
20	Up to 300	18	15.5	13	9	10	19	8	20 <sup>0</sup> <sub>0.033</sub>	13	41	5	65.3	28	5	30	M8 x 1.25	15	24
25	Up to 300	22	19.5	17	9	10	19	10	26 <sup>0</sup> <sub>0.033</sub>	13	45	6	70.5	33.5	5.5	30	M10 x 1.25	15	30
32	Up to 300	22	19.5	17	9	10	19	12	26 <sup>0</sup> <sub>0.033</sub>	13	45	6	76.5	37.5	5.5	30	M10 x 1.25	15	34.5
40	Up to 300	24	21	22	10	15	30	14	32 <sup>0</sup> <sub>0.039</sub>	16	50	8	84.5	46.5	7	39	M14 x 1.5	21.5	42.5

Bore size (mm)	NN	Q	QY	RR	S	U	Z	ZZ
20	M20 x 1.5	19.8	14	9	62	14	133	142
25	M26 x 1.5	22	14	9	62	14	137	146
32	M26 x 1.5	25.8	16	9	64	14	139	148
40	M32 x 2	29.8	16	11	88	18	177	188

\* Clevis pin and snap ring (cotter pin for ø40) are packaged together.

**Rod Side Trunnion Type (U)**

CVM5U  -

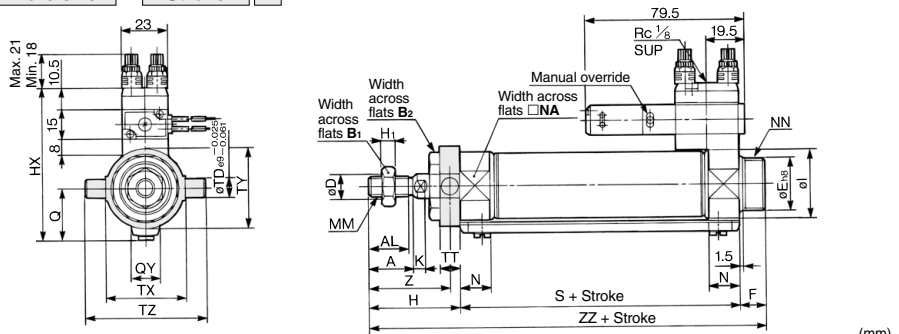

Bore size (mm)	Stroke range	A	AL	B <sub>1</sub>	B <sub>2</sub>	D	Eh <sub>8</sub>	F	H	H <sub>1</sub>	HX	I	K	MM	N	NA	NN	Q
20	Up to 300	18	15.5	13	26	8	20 <sup>0</sup> <sub>0.033</sub>	13	41	5	65.3	28	5	M8 x 1.25	15	24	M20 x 1.5	19.8
25	Up to 300	22	19.5	17	32	10	26 <sup>0</sup> <sub>0.033</sub>	13	45	6	70.5	33.5	5.5	M10 x 1.25	15	30	M26 x 1.5	22
32	Up to 300	22	19.5	17	32	12	26 <sup>0</sup> <sub>0.033</sub>	13	45	6	76.5	37.5	5.5	M10 x 1.25	15	34.5	M26 x 1.5	25.8
40	Up to 300	24	21	22	41	14	32 <sup>0</sup> <sub>0.039</sub>	16	50	8	84.5	46.5	7	M14 x 1.5	21.5	42.5	M32 x 2	29.8

Bore size (mm)	QY	S	TD	TT	TX	TY	TZ	Z	ZZ
20	14	62	8	10	32	32	52	36	116
25	14	62	9	10	40	40	60	40	120
32	16	64	9	10	40	40	60	40	122
40	16	88	10	11	53	53	77	44.5	154


\* Brackets are packaged together.

- CVQ
- CVQM
- CVJ
- CVM
- CV3
- CVS1
- MVGQ

# CVM5 Series

## Head Side Trunnion Type (T)

CVM5T  –

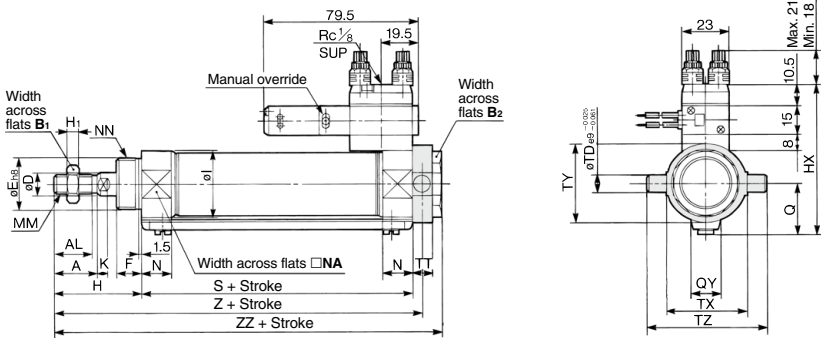

(mm)


Bore size (mm)	Stroke range	A	AL	B <sub>1</sub>	B <sub>2</sub>	D	Eh <sub>8</sub>	F	H	H <sub>1</sub>	HX	I	K	MM	N	NA	NN
20	Up to 300	18	15.5	13	26	8	20 <sup>+0.033</sup>	13	41	5	65.3	28	5	M8 x 1.25	15	24	M20 x 1.5
25	Up to 300	22	19.5	17	32	10	26 <sup>+0.033</sup>	13	45	6	70.5	33.5	5.5	M10 x 1.25	15	30	M26 x 1.5
32	Up to 300	22	19.5	17	32	12	26 <sup>+0.033</sup>	13	45	6	76.5	37.5	5.5	M10 x 1.25	15	34.5	M26 x 1.5
40	Up to 300	24	21	22	41	14	32 <sup>+0.039</sup>	16	50	8	84.5	46.5	7	M14 x 1.5	21.5	42.5	M32 x 2

(mm)


Bore size (mm)	Q	QY	S	TD	TT	TX	TY	TZ	Z	ZZ
20	19.8	14	62	8	10	32	32	52	108	118
25	22	14	62	9	10	40	40	60	112	122
32	25.8	16	64	9	10	40	40	60	114	124
40	29.8	16	88	10	11	53	53	77	143.5	154

\* Brackets are packaged together.

## DIN Terminal

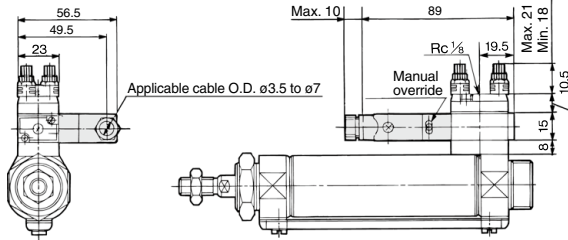

## Double Solenoid



\* For the mounting brackets of flange, single clevis, double clevis and head side trunnion type, the double solenoid may not be used depending on the mounting conditions.

# Valve Mounted Cylinder: Non-rotating Rod Type Double Acting

## CVM5K Series

ø20, ø25, ø32, ø40

### How to Order

**Mounting type**

B	Basic type
L	Axial foot type
F	Rod side flange type
G	Head side flange type
C	Single clevis type
D	Double clevis type
T	Head side trunnion type
U	Rod side trunnion type

**Solenoid valve voltage**

Standard		Option	
1	100 VAC (50/60 Hz)	3	110 VAC (50/60 Hz)
2	200 VAC (50/60 Hz)	4	220 VAC (50/60 Hz)
5	24 VDC	6	12 VDC

For other rated voltages, please consult with SMC.

**Solenoid valve**

1	2 position single
2	2 position double
3	3 position closed center (Option)
4	3 position exhaust center (Option)

**Electrical entry**

G	Grommet
L	L plug connector
M	M plug connector
D	DIN terminal

**Light/Surge voltage suppressor**

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor (Except Type G)

**Made to Order**  
Refer to page 782 for details.

**Port thread type**

Nil	Rc
TN	NPT
TF	G

**Suffice for cylinder**

Nil	None
J	Nylon tarpaulin
K	Heat resistant tarpaulin

**Auto switch**

Nil	Without auto switch
-----	---------------------

\* For the applicable auto switch model, refer to the table below.

**Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

**Auto switch mounting bracket**<sup>(Note)</sup>

Note) This symbol is indicated when the D-A9□ or M9□ type auto switch is specified. This mounting bracket does not apply to other auto switches (D-C7□ and H7□, etc.) (Nil)

**Bore size**

20	20 mm
25	25 mm
32	32 mm
40	40 mm

**Piping**

Nil	Screw-in type
F	Built-in One-touch fitting

**Cylinder stroke (mm)**  
(Refer to "Standard Stroke" on page 782.)

**Rod extended/retracted when energized**

Nil	Rod extended when energized
B	Rod retracted when energized

\* Only in case of 2 position single solenoid valve.

**Built-in Magnet Cylinder Model**

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDVM5KF40-100-11GZ

**Ordering Example:**  
CVM5K L 32 [ ] [ ] - 100 [ ] [ ] - 1 1 M Z - [ ]  
CDVM5K L 32 [ ] [ ] - 100 [ ] [ ] - 1 1 M Z - M9BW [ ] - C - [ ]

### Applicable Auto Switches<sup>(1)</sup> (Refer to pages 941 to 1067 for further information on auto switches.)

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load			
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)		None (N)	Relay, PLC		
Solid state auto switch		Grommet		3-wire (NPN)	24 V	5 V, 12 V	M9NV	M9N	●	●	●	○	○	○	IC circuit		
				M9PV				●	●	●	○	○	○				
		Connector		2-wire	12 V	M9BV	●	●	●	○	○	○	○	—			
				H7C		●	●	●	○	○	○						
	Diagnostic indication (2-color indicator)	Yes	Grommet		3-wire (NPN)	24 V	5 V, 12 V	M9NVW	M9NW	●	●	●	○	○	○	IC circuit	Relay, PLC
					M9PVW			M9PW	●	●	●	○	○	○			
	Water resistant (2-color indicator)		Grommet		2-wire	12 V	5 V, 12 V	M9BWW	M9WB	●	●	●	○	○	○	—	
					M9NAV <sup>*1</sup>			M9NA <sup>*1</sup>	○	○	○	○	○	○	○		
	With diagnostic output (2-color indicator)		Grommet		3-wire (PNP)	24 V	5 V, 12 V	M9PAV <sup>*1</sup>	M9PA <sup>*1</sup>	○	○	○	○	○	○	IC circuit	
					M9BAV <sup>*1</sup>			M9BA <sup>*1</sup>	○	○	○	○	○	○	○		
Reed auto switch		Grommet	Yes	3-wire (NPN equivalent)	24 V	12 V	A96V	A96	●	●	●	○	○	○	IC circuit		
							A93V <sup>*2</sup>	A93	●	●	●	○	○	○			
							A90V	A90	●	●	●	○	○	○			
							B54	●	●	●	○	○	○				
		Connector	Yes			2-wire	24 V	12 V	B64	●	●	●	○	○	○	—	
									C73C	●	●	●	○	○	○		
									C80C	●	●	●	○	○	○		
									B59W	●	●	●	○	○	○		
Diagnostic indication (2-color indicator)	Yes	Grommet	Yes	3-wire (NPN equivalent)	24 V	12 V	A96V	A96	●	●	●	○	○	IC circuit	Relay, PLC		
							A93V <sup>*2</sup>	A93	●	●	●	○	○			○	
							A90V	A90	●	●	●	○	○			○	
							B54	●	●	●	○	○	○				

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
1 m ..... M (Example) M9NWW  
3 m ..... L (Example) M9NWL  
5 m ..... Z (Example) M9NZ  
None ..... N (Example) H7CN

\* Solid state auto switches marked with "○" are produced upon receipt of order.  
\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.  
\*2 1 m type lead wire is only applicable to D-A93.

\* Since there are other applicable auto switches than listed, refer to page 789 for details.  
\* For details about auto switches with pre-wired connector, refer to pages 1014 and 1015.  
\* D-A9□/M9□ auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled before shipped.)

# CVM5K Series

**A hexagon shaped rod that does not rotate.**

## Non-rotating accuracy


$\varnothing 20, \varnothing 25 - \pm 0.7^\circ$

$\varnothing 32, \varnothing 40 - \pm 0.5^\circ$

**Can operate without lubrication.**


**Auto switches can also be mounted.**

Can be installed with auto switches to facilitate the detection of the cylinder's stroke position.



## Symbol

Rubber bumper



**Made to Order Specifications**

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC6	Made of stainless steel

Refer to pages 787 to 789 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Auto switch mounting bracket: Part no.

## Specifications

Applicable bore size (mm)		20	25	32	40
Rod non-rotating accuracy		$\pm 0.7^\circ$			$\pm 0.5^\circ$
Fluid		Air			
Action		Double acting, Single rod			
Proof pressure		1.0 MPa			
Maximum operating pressure		0.7 MPa			
Minimum operating pressure		0.15 MPa			
Ambient and fluid temperature		-10 to 50°C (No freezing)			
Lubrication		Not required (Non-lube)			
Stroke length tolerance		$+1.4$ 0			
Piston speed (mm/s)		50 to 700 *	50 to 650 *	50 to 590 *	50 to 420 *
Allowable kinetic energy		0.27 J	0.4 J	0.65 J	1.2 J
Port size	Screw-in type	Rc 1/8			
	Built-in One-touch fitting	O.D.: $\varnothing 6$ /I.D.: $\varnothing 4$			
Mounting		Basic type, Axial foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Head side trunnion type, Rod side trunnion type			

Note) The figures marked with "\*" represent the values of the cylinder with the silencer type exhaust throttle valve removed. To operate the cylinder at these values, prevent dust from entering by installing an AN120-M5 silencer on the EXH port.

## Solenoid Valve Specifications

Applicable solenoid valve model		VZ3□90 series	
Coil rated voltage		Standard: 100/200 VAC (50/60 Hz), 24 VDC Semi-standard: 110/220 VAC, 12 VDC	
Effective area of valve (Cv factor)		4.5 mm <sup>2</sup> (0.25)	
Allowable voltage		-15 to 10%	
Coil insulation		Class B or equivalent (130°C)	
Electrical entry		Grommet, L plug connector, M plug connector, DIN terminal	
Power consumption (W) <sup>Note)</sup>	DC	1.8 (With indicator light: 2.1)	
Apparent power (VA) <sup>Note)</sup>	AC Inrush	4.5/50 Hz, 4.2/60 Hz	
	AC Holding	3.5/50 Hz, 3.0/60 Hz	

Note) At the rated voltage.

## Standard Stroke

Bore size (mm)	Standard stroke (mm) <sup>Note)</sup>
20	25, 50, 75, 100, 125, 150 200, 250, 300
25	
32	
40	

Note) Other intermediate strokes can be manufactured upon receipt of order.

Although it is possible to make up to 1000 stroke length, when exceeding the standard stroke, there may be the case which cannot meet the specifications.

## Rod Boot Material

Symbol	Rod boot material	Maximum ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C *

\* Maximum ambient temperature for the rod boot itself.

# Valve Mounted Cylinder: Non-rotating Rod Type Double Acting **CVM5K Series**

## Weight

		(kg)			
Bore size (mm)		20	25	32	40
Basic weight	Basic type	0.25	0.32	0.39	0.67
	Axial foot type	0.40	0.48	0.55	0.94
	Flange type	0.31	0.41	0.48	0.79
	Single clevis type	0.29	0.36	0.43	0.76
	Double clevis type	0.30	0.38	0.44	0.80
	Trunnion type	0.29	0.39	0.45	0.77
Additional weight per each 50 mm of stroke		0.05	0.07	0.09	0.14
Option bracket	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (with pin)	0.07	0.07	0.07	0.20

Calculation: (Example) **CVM5K132-100-11G**

- Basic weight..... 0.55 (kg) (Axial foot type ø32)
- Additional weight..... 0.09 (kg/50 st)
- Cylinder stroke ..... 100 (st)  $0.55 + 0.09 \times 100/50 = 0.73$  kg

## Mounting Bracket and Accessory

Mounting	Accessory			Standard equipment				Option			
	Mounting nut	Rod end nut	Clevis pin	Single knuckle joint	Double knuckle joint <sup>(3)</sup>	Pivot bracket <sup>(5)</sup>	Pivot bracket pin <sup>(6)</sup>	Single knuckle joint	Double knuckle joint	Pivot bracket	Pivot bracket pin
Basic type	● (1 pc.)	●	—	●	●	—	—	—	—	—	—
Axial foot type	● (2)	●	—	●	●	—	—	—	—	—	—
Rod side flange type	● (1)	●	—	●	●	—	—	—	—	—	—
Head side flange type	● (1)	●	—	●	●	—	—	—	—	—	—
Single clevis type	— <sup>(1)</sup>	●	—	●	●	●	●	—	—	●	●
Double clevis type <sup>(3)</sup>	— <sup>(1)</sup>	●	● <sup>(4)</sup>	●	●	—	—	—	—	—	—
Head side trunnion type	● (1) <sup>(2)</sup>	●	—	●	●	—	—	—	—	—	—
Rod side trunnion type	● (1) <sup>(2)</sup>	●	—	●	●	●	—	—	—	—	—

- Note 1) Mounting nut is not equipped with single clevis type and double clevis type.  
 Note 2) Trunnion nuts are equipped for head side trunnion and rod side trunnion.  
 Note 3) Pin and set ring are shipped together with double clevis and double knuckle joint.  
 Note 4) Retaining rings (cotter pins for ø40) are included in clevis pins.  
 Note 5) Pin and retaining ring are not included in pivot bracket.  
 Note 6) Retaining rings are included in pivot bracket pin.

## Accessory (Option)

Refer to page 786 for part numbers and dimensions of the single knuckle joint, double knuckle joint, clevis pin, knuckle pin, rod end nut, mounting nut, and trunnion nut.

## ⚠ Precautions

**Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, pages 3 to 12 for Actuator and Auto Switch Precautions, and 3/4/5 Port Solenoid Valve Precautions in Best Pneumatics No. 1-1.**

### Precautions


#### ⚠ Warning

1. **Do not rotate the cover.**  
If a cover is rotated when installing a cylinder or screwing a fitting into the port, it is likely to damage the junction part with cover.

#### ⚠ Caution

1. **Avoid using the air cylinder in such a way that rotational torque would be applied to the piston rod.**  
If rotational torque is applied, the non-rotating guide will deform, causing a loss of non-rotating accuracy. Also, to screw a bracket or a nut onto the threaded portion at the end of the piston rod, make sure to retract the piston rod entirely, and place a wrench on the parallel sections of the rod that protrudes. To tighten, take precautions to prevent the tightening torque from being applied to the non-rotating guide.

Allowable rotational torque (N·m or less)	ø20	ø25	ø32	ø40
	0.2	0.25	0.25	0.44



### Disassembly/Replacement

#### ⚠ Caution

1. **When replacing rod seals, please contact SMC.**  
Air leakage may be happened, depending on the position in which a rod seal is fitted. Thus, please contact SMC when replacing them.
2. **Not able to disassemble.**  
Since the cover and the cylinder tube are combined by crimping method, it is impossible to disassemble it. Therefore, the internal parts of a cylinder other than rod seal cannot be replaced at all.
3. **Do not touch the cylinder during operation.**  
If the cylinder is operating at a high frequency, be aware that the cylinder tube surface could become very hot, creating the risk of burns.
4. **Conjoin the rod end part, so that rod boot might not be twisted.**  
If a cylinder were installed with its rod boot being twisted, the rod boot could be damaged during operation.

### Model Selection

#### ⚠ Warning

1. **Confirm the specifications.**  
Products in this catalog are designed to be used for compressed air systems. If not operated within the designated pressure or temperature, it may damage the products or cause malfunction. (Refer to specifications.)
2. **Energizing continuously for a long period of time**  
When the valve is continuously energized for a long period of time, the performance may deteriorate, shorten the service life or affect peripheral equipment adversely since temperature rises when coils generate heat.

**CVQ**

**CVQM**

**CVJ**

**CVM**

**CV3**

**CVS1**

**MVGQ**


**D**

**X**




**Basic Type (B): External Dimensions**


CVM5KB  —

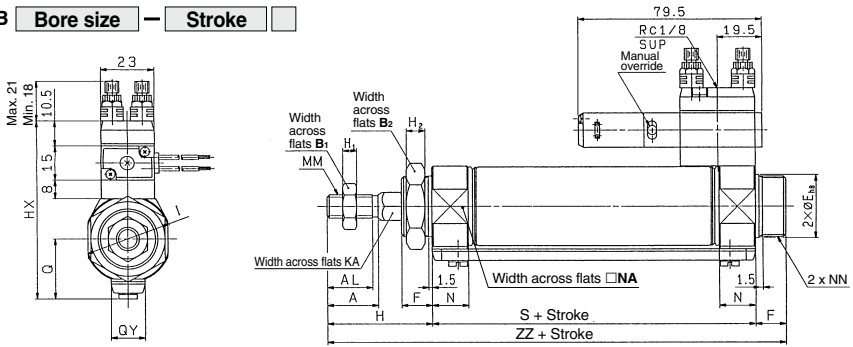

**Built-in One-touch fitting**

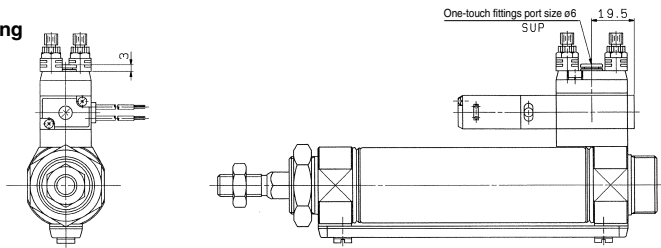

**With rod boot**

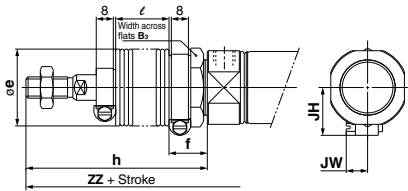

For DIN terminal and double solenoid, refer to page 780.

Bore size (mm)	Stroke range	A	AL	B <sub>1</sub>	B <sub>2</sub>	EH <sub>18</sub>	F	Q	QY	H	H <sub>1</sub>	H <sub>2</sub>	HX	I	KA	MM	N	NA	NN	S	ZZ
20	Up to 300	18	15.5	13	26	20 <sup>0</sup> <sub>-0.023</sub>	13	19.8	14	41	5	8	65.3	28	8.2	M8 x 1.25	15	24	M20 x 1.5	62	116
25	Up to 300	22	19.5	17	32	26 <sup>0</sup> <sub>-0.033</sub>	13	22	14	45	6	8	70.5	33.5	10.2	M10 x 1.25	15	30	M26 x 1.5	62	120
32	Up to 300	22	19.5	17	32	26 <sup>0</sup> <sub>-0.033</sub>	13	25.8	16	45	6	8	76.5	37.5	12.2	M10 x 1.25	15	34.5	M26 x 1.5	64	122
40	Up to 300	24	21	22	41	32 <sup>0</sup> <sub>-0.039</sub>	16	29.8	16	50	8	10	84.5	46.5	14.2	M14 x 1.5	21.5	42.5	M32 x 2	88	154

**With Rod Boot**

Bore size (mm)	B <sub>s</sub>	e	f	h					ℓ					JH (Reference)	JW (Reference)
				1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300		
20	30	36	18	68	81	93	106	131	12.5	25	37.5	50	75	23.5	10.5
25	32	36	18	72	85	97	110	135	12.5	25	37.5	50	75	23.5	10.5
32	32	36	18	72	85	97	110	135	12.5	25	37.5	50	75	23.5	10.5
40	41	46	20	77	90	102	115	140	12.5	25	37.5	50	75	27	10.5

(mm)

Bore size (mm)	ZZ				
	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
20	143	156	168	181	206
25	147	160	172	185	210
32	149	162	174	187	212
40	181	194	206	219	244

- CVQ
- CVQM
- CVJ
- CVM
- CVS3
- CVS1
- MVGQ


- D
- X



# CVM5 Series


# Accessory dimensions

## Single Knuckle Joint Mounting (mm)

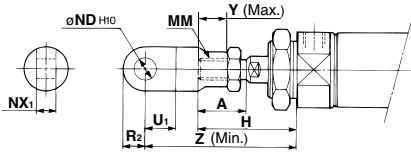

Bore size	A	H	MM	ND H10	NX1	U1	R2	Y	Z
20	18	41	M8 x 1.25	9 <sup>+0.058</sup> <sub>0</sub>	9 <sup>+0.1</sup> <sub>-0.2</sub>	14	10	11	66
25, 32	22	45	M10 x 1.25	9 <sup>+0.058</sup> <sub>0</sub>	9 <sup>+0.1</sup> <sub>-0.2</sub>	14	10	14	69
40	24	50	M14 x 1.5	12 <sup>+0.070</sup> <sub>0</sub>	16 <sup>+0.1</sup> <sub>-0.3</sub>	20	14	13	92


## Double Knuckle Joint Mounting (mm)

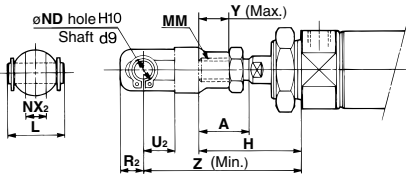

Bore size	A	H	L	MM	ND	NX2	R2	U2	Y	Z
20	18	41	25	M8 x 1.25	9	9 <sup>+0.2</sup> <sub>-0.1</sub>	10	14	11	66
25, 32	22	45	25	M10 x 1.25	9	9 <sup>+0.2</sup> <sub>-0.1</sub>	10	14	14	69
40	24	50	49.7	M14 x 1.5	12	16 <sup>+0.3</sup> <sub>-0.1</sub>	13	25	13	92


## Double Clevis Pin/Material: Carbon steel (mm)

Bore size:  $\phi 20, \phi 25, \phi 32$   
CDP-1



Retaining ring: Type C9 for shaft  
\* Retaining rings (cotter pins for  $\phi 40$ ) are included.


Bore size:  $\phi 40$   
CDP-2



Cotter pins used  $\phi 3 \times 18 \ell$

## Single Knuckle Joint (mm)


I-020B, 032B Material: Rolled steel I-040B Material: Free cutting sulfur steel

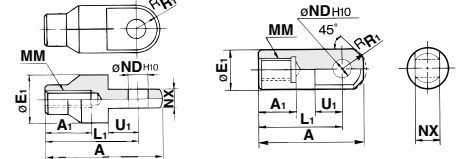

Part no.	Applicable bore size	A	A1	E1	L1	MM	ND H10	NX	R1	U1
I-020B	20	46	16	20	36	M8 x 1.25	9 <sup>+0.058</sup> <sub>0</sub>	9 <sup>+0.1</sup> <sub>-0.2</sub>	10	14
I-032B	25, 32	48	18	20	38	M10 x 1.25	9 <sup>+0.058</sup> <sub>0</sub>	9 <sup>+0.1</sup> <sub>-0.2</sub>	10	14
I-040B	40	69	22	24	55	M14 x 1.5	12 <sup>+0.070</sup> <sub>0</sub>	16 <sup>+0.1</sup> <sub>-0.3</sub>	15.5	20

## Double Knuckle Joint (mm)

Y-020B, Y-032B Material: Rolled steel Y-040B Material: Cast iron

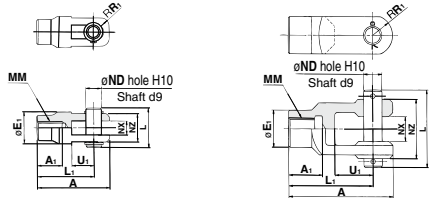


Part no.	Applicable cylinder bore size	A	A1	E1	L	L1	MM	ND
Y-020B	20	46	16	20	25	36	M8 x 1.25	9
Y-032B	25, 32	48	18	20	25	38	M10 x 1.25	9
Y-040B	40	68	22	24	49.7	55	M14 x 1.5	12

Part no.	NX	NZ	R1	U1	Applicable pin pair no.	Retaining ring size
Y-020B	9 <sup>+0.2</sup> <sub>-0.1</sub>	18	5	14	CDP-1	Type C9 for shaft
Y-032B	9 <sup>+0.2</sup> <sub>-0.1</sub>	18	5	14	CDP-1	Type C9 for shaft
Y-040B	16 <sup>+0.3</sup> <sub>-0.1</sub>	38	13	25	CDP-3	$\phi 3 \times 18 \ell$

\* Knuckle pins and retaining rings (cotter pins for  $\phi 40$ ) are included.


## Double Knuckle Pin/Material: Carbon steel (mm)

Bore size:  $\phi 20, \phi 25, \phi 32$   
CDP-1



Retaining ring: Type C9 for shaft  
\* Retaining rings (cotter pins for  $\phi 40$ ) are included.


Bore size:  $\phi 40$   
CDP-3



Cotter pins used  $\phi 3 \times 18 \ell$

## Rod End Nut (mm)


Material: Carbon steel



Part no.	Applicable bore size	B	C	D	d	H
NT-02	20	13	15.0	12.5	M8 x 1.25	5
NT-03	25, 32	17	19.6	16.5	M10 x 1.25	6
NT-04	40	22	25.4	21.0	M14 x 1.5	8

## Mounting Nut (mm)


Material: Carbon steel



Part no.	Applicable bore size	B	C	D	d	H
SN-020B	20	26	30	25.5	M20 x 1.5	8
SN-032B	25, 32	32	37	31.5	M26 x 1.5	8
SN-040B	40	41	47.3	40.5	M32 x 2.0	10

## Trunnion Nut (mm)

Material: Carbon steel




Part no.	Applicable bore size	B	C	D	d	H
TN-020B	20	26	28	25.5	M20 x 1.5	10
TN-032B	25, 32	32	34	31.5	M26 x 1.5	10
TN-040B	40	41	45	40.5	M32 x 2.0	10

# Auto Switch Mounting 1

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Mounting Height

### Reed auto switch


D-A9□

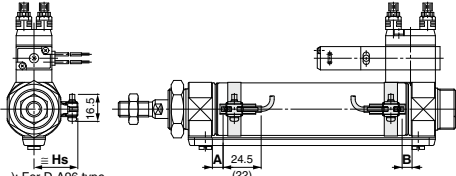


( ) : For D-A96 type

A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.


D-C7/C8

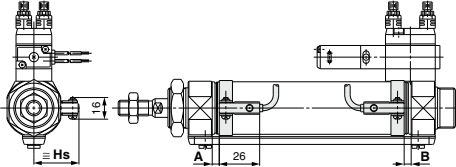

D-B5/B6/B59W

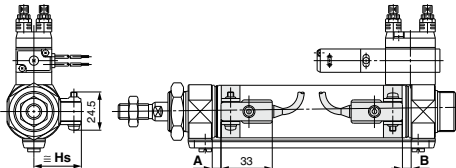


D-C73C/C80C

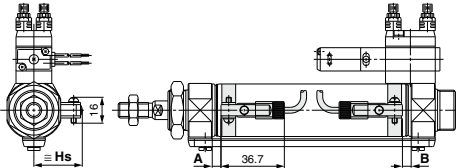


### Solid state auto switch


D-M9□/D-M9□W

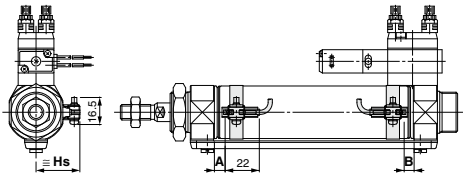


D-H7□/H7□W/H7NF

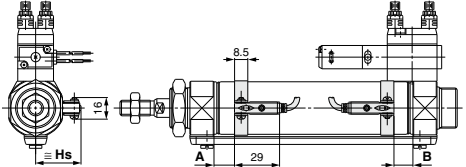

D-G5NT

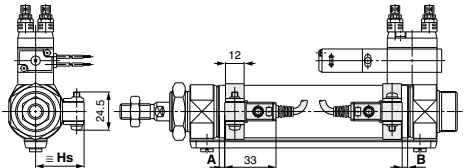

D-H7C

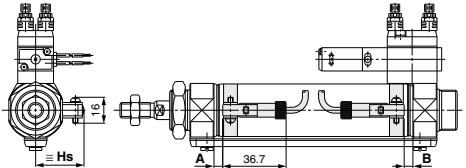

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Mounting Height

### Auto Switch Proper Mounting Position

(mm)

Auto switch model	D-A9□(V)		D-M9□(V) D-M9□W(V) D-A9□A(V)		D-B5□ D-B64		D-C7□ D-C80 D-C73C D-C80C		D-B59W		D-H7□ D-H7C D-H7□W D-H7NF		D-G5NT	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B
Bore size (mm) 20	6.5	5.5	10.5	9.5	1	0	7	6	4	3	6	5	2.5	1.5
25	6.5	5.5	10.5	9.5	1	0	7	6	4	3	6	5	2.5	1.5
32	7.5	6.5	11.5	10.5	2	1	8	7	5	4	7	6	3.5	2.5
40	13.5	11.5	17.5	15.5	7	6	13	12	10	9	12	11	8.5	7.5

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

### Auto Switch Mounting Height

(mm)

Auto switch model	D-A9□(V) D-M9□(V) D-M9□W(V) D-M9□A(V)		D-B5□ D-B64 D-B59W D-G5NT D-H7C		D-C7□ D-C80 D-H7□ D-H7□W D-H7NF		D-C73C D-C80C	
	Hs		Hs		Hs		Hs	
Bore size (mm) 20	23		25.5		22.5		25	
25	25.5		28		25		27.5	
32	29		31.5		28.5		31	
40	33		35.5		32.5		35	

CVQ

CVM

CVJ

CVM

CV3

CVS1

MVGQ

D-

-X

# Auto Switch Mounting 2

## Minimum Auto Switch Mounting Stroke

Auto switch model	No. of auto switch mounted				n: No. of auto switches (mm)	
	1	2		n		
		Different surfaces	Same surface	Different surfaces	Same surface	
D-A9□ D-M9□ D-M9□W	10	15 <sup>Note 1)</sup>	45 <sup>Note 1)</sup>	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6...) <sup>Note 2)</sup>	$45 + 45 (n-2)$ (n = 2, 3, 4, 5...)	
D-M9□V	5	20	35	$20 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6...) <sup>Note 2)</sup>	$35 + 35 (n-2)$ (n = 2, 3, 4, 5...)	
D-A9□V	5	15	25	$15 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6...) <sup>Note 2)</sup>	$25 + 35 (n-2)$ (n = 2, 3, 4, 5...)	
D-M9□WV D-M9□AV	10	20	35	$20 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6...) <sup>Note 2)</sup>	$35 + 35 (n-2)$ (n = 2, 3, 4, 5...)	
D-C7□ D-C80	10	15	50	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6...) <sup>Note 2)</sup>	$50 + 45 (n-2)$ (n = 2, 3, 4, 5...)	
D-H7□ D-H7□W D-H7NF	10	15	60	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6...) <sup>Note 2)</sup>	$60 + 45 (n-2)$ (n = 2, 3, 4, 5...)	
D-C73C D-C80C D-H7C	10	15	65	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6...) <sup>Note 2)</sup>	$65 + 50 (n-2)$ (n = 2, 3, 4, 5...)	
D-B5□/B64 D-G5NT	10	15	75	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6...) <sup>Note 2)</sup>	$75 + 55 (n-2)$ (n = 2, 3, 4, 5...)	
D-B59W	15	20	75	$20 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6...) <sup>Note 2)</sup>	$75 + 55 (n-2)$ (n = 2, 3, 4, 5...)	

Note 2) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.

Note 1) Auto switch mounting (The adjustment as shown in the figures below is required with the following stroke ranges.)

Auto switch model	With 2 auto switches	
	Different surfaces <sup>Note 1)</sup>	Same surface <sup>Note 1)</sup>
	<p>The proper auto switch mounting position is 6 mm inward from the switch holder edge.</p>	<p>The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with each other.</p>
D-A93	—	45 to less than 50 stroke
D-M9□ D-M9□W	15 to less than 20 stroke	45 to less than 55 stroke

## Operating Range

Auto switch model	(mm)			
	Bore size (mm)			
	20	25	32	40
D-A9□(V)	6	6	6	6
D-M9□(V)/M9□W(V) D-M9□A(V)	3.5	3	3.5	3
D-C7□/C80 D-C73C/C80C	7	8	8	8
D-B5□/B64	8	8	9	9
D-B59W	12	12	13	13
D-H7□/H7□W D-G5NT/H7NF	4	4	4.5	5
D-H7C	7	8.5	9	10

\* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approximately ±30% dispersion). It may vary substantially depending on an ambient environment.

**Auto Switch Mounting Bracket: Part No.**

Auto switch mounting	Bore size (mm)			
	ø20	ø25	ø32	ø40
D-M9□(V) D-M9□W(V) D-A9□(V)	BM5-020 Note 1)	BM5-025 Note 1)	BM5-032 Note 1)	BM5-040 Note 1)
D-M9□A(V)	BM5-020S Note 2)	BM5-025S Note 2)	BM5-032S Note 2)	BM5-040S Note 2)
D-H7□ D-H7□W D-H7NF D-C7□/C80 D-C73C/C80C	BM2-020A	BM2-025A	BM2-032A	BM2-040A
D-B5□/B64 D-B59W D-G5NT	BA2-020	BA2-025	BA2-032	BA2-040

Note 1) Set part number which includes the auto switch mounting band (BM2-□□□A) and the holder kit (BJ5-1/Switch bracket: Transparent).

Since the switch bracket (made from nylon) are affected in an environment where alcohol, chloroform, methylamines, hydrochloric acid or sulfuric acid is splashed over, so it cannot be used. Please consult SMC regarding other chemicals.

Note 2) Set part number which includes the auto switch mounting band (BM2-□□□S/tainless steel screw) and the holder kit (BJ4-1/Switch bracket: White).


Note 3) For the D-M9□A (V) type auto switch, do not install the switch bracket on the indicator light.

**[Mounting screw set made of stainless steel]**

The following set of mounting screws made of stainless steel is available. Use it in accordance with the operating environment. (Please order the auto switch mounting bracket separately, since it is not included.)

BBA4: For D-C7/C8/H7 types

Note 2) Refer to page 1048 for the details of BBA4.

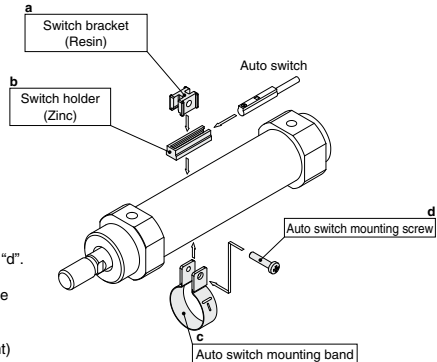

- (1) BJ□-1 is a set of "a" and "b".
  - (2) BM2-□□□A (S) is a set of "c" and "d".
- Band (c) is mounted so that the projected part is on the internal side (contact side with the tube)
- BJ4-1 (Switch bracket: White)  
BJ5-1 (Switch bracket: Transparent)

Besides the models listed in How to Order, the following auto switches are applicable. Refer to pages 941 to 1067 for detailed specifications.

Auto switch type	Part no.	Electrical entry (Fetching direction)	Features
Reed	D-B53, C73, C76	Grommet (In-let)	—
	D-C80		Without indicator light
Solid state	D-H7A1, H7A2, H7B		—
	D-H7NW, H7PW, H7BW		Diagnostic indication (2-color)
	D-G5NT		With timer

\* For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1014 and 1015 for details.  
\* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H types) are also available. Refer to page 959 for details.

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

-X□

# Valve Mounted Cylinder

## Single Acting, Spring Return/Extend

# CVM3 Series

∅20, ∅25, ∅32, ∅40

### How to Order

**Mounting type**

B	Basic type
L	Axial foot type
F	Rod side flange type
G	Head side flange type
C	Single clevis type
D	Double clevis type
T	Head side trunnion type
U	Rod side trunnion type

**Bore size**

20	20 mm
25	25 mm
32	32 mm
40	40 mm

**Action**

S	Single acting, Spring return
T	Single acting, Spring extend

**Solenoid valve voltage**

Standard		Option	
1	100 VAC (50/60 Hz)	3	110 VAC (50/60 Hz)
2	200 VAC (50/60 Hz)	4	220 VAC (50/60 Hz)
5	24 VDC	6	12 VDC

For other rated voltages, please consult with SMC.

**Light/Surge voltage suppressor**

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor (Except Type G)

**Port thread type**

Nil	Rc
TN	NPT
TF	G

**Electrical entry**

G	Grommet
L	L plug connector
M	M plug connector
D	DIN terminal

**Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

**Made to Order**  
Refer to page 791 for details.

**Auto switch mounting bracket** (Note)  
Note) This symbol is indicated when the D-A9□ or M9□ type auto switch is specified. This mounting bracket does not apply to other auto switches (D-C7□ and H7□, etc.) (Nil)

**Auto switch**

Nil	Without auto switch
-----	---------------------

**Piping**

Nil	Screw-in type
F	Built-in One-touch fitting

**Built-in Magnet Model**  
If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDVM3B25-150S-5G

**Cylinder stroke (mm)**  
(Refer to "Standard Stroke" on page 791.)

**Example Order Codes:**  
CVM3 L 32 [ ] [ ] - 100 T - 1 L Z - [ ]  
With auto switch CDVM3 L 32 [ ] [ ] - 100 T - 1 L Z - M9BW [ ] - C - [ ]  
With auto switch (Built-in magnet)

### Applicable Auto Switches

Refer to pages 941 to 1067 for further information on auto switches.

Type	Special function	Electrical entry	Indicator/light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)		None (N)	IC circuit	Relay, PLC
									—	—	—	—				
Solid state auto switch	—	Grommet	—	3-wire (NPN)	5 V, 12 V	—	M9NV	M9N	●	●	○	—	○	IC circuit	Relay, PLC	
				3-wire (PNP)			M9PV	M9P	●	●	○	—	○			
	Diagnostic indication (2-color indicator)	Connector	Yes	2-wire	12 V	—	M9BV	M9B	●	—	●	●	—	—		
				—			—	H7C	●	—	●	●	—	—		
	Water resistant (2-color indicator)	Grommet	—	3-wire (NPN)	5 V, 12 V	—	M9NWV	M9NW	●	●	○	—	○	IC circuit		
				3-wire (PNP)			M9PWV	M9PW	●	●	○	—	○	IC circuit		
	With diagnostic output (2-color indicator)	Connector	Yes	2-wire	12 V	—	M9BWV	M9BW	●	●	○	—	○	—		
				3-wire (NPN)			M9NAV*1	M9NA*1	○	○	○	○	○	○		IC circuit
	—	Grommet	—	3-wire (PNP)	5 V, 12 V	—	M9PAV*1	M9PA*1	○	○	○	○	○	○		IC circuit
				2-wire			—	—	○	○	○	○	○	○		—
Reed auto switch	—	Grommet	Yes	4-wire (NPN)	5 V, 12 V	—	M9BAV*1	M9BA*1	○	○	○	○	○	○	IC circuit	
				3-wire (NPN equivalent)			—	H7NF	●	●	●	●	—	○	IC circuit	
	Diagnostic indication (2-color indicator)	Connector	Yes	2-wire	24 V	12 V	A96V	A96	●	●	●	●	—	—		
							—	A93V*2	A93	●	●	●	●	—	—	
	—	Grommet	None	—	—	—	A90V	A90	●	●	●	●	—	IC circuit		
							—	—	B54	●	●	●	●	—	—	
	—	Connector	Yes	—	—	—	—	B64	●	●	●	●	—	—		
							—	—	C73C	●	●	●	●	—	—	
	—	Grommet	None	—	—	—	—	C80C	●	●	●	●	—	IC circuit		
							—	—	B59W	●	●	●	●	—	—	


\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
1 m ..... M (Example) M9NWV  
3 m ..... L (Example) M9NWL  
5 m ..... Z (Example) M9NWZ  
None ..... N (Example) H7CN

\* Solid state auto switches marked with "○" are produced upon receipt of order.  
\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.  
\*2 1 m type lead wire is only applicable to D-A93.


\* Since there are other applicable auto switches than listed, refer to page 811 for details.  
\* For details about auto switches with pre-wired connector, refer to pages 1014 and 1015.  
\* D-A9□/M9□ auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled before shipped.)

# Valve Mounted Cylinder Single Acting, Spring Return/Extend **CVM3 Series**

An auto switch cylinder with the switch installed can also be manufactured.



**Symbol**  
Rubber bumper



**Made to Order**  
**Made to Order Specifications**  
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC6	Made of stainless steel
-XC29	Double knuckle joint with spring pin
-XC52	Mounting nut with set screw

Refer to pages 808 to 811 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Auto switch mounting bracket: Part no.

## Specifications

Applicable bore size (mm)		20	25	32	40
<b>Action</b>		Single acting, Spring return/Spring extend			
<b>Fluid</b>		Air			
<b>Cushion</b>		Rubber bumper			
<b>Proof pressure</b>		1.0 MPa			
<b>Maximum operating pressure</b>		0.7 MPa			
<b>Minimum operating pressure</b>		0.18 MPa Spring return	0.23 MPa Spring extend		
<b>Ambient and fluid temperature</b>		-10 to 50°C (No freezing)			
<b>Lubrication</b>		Not required (Non-lube)			
<b>Stroke length tolerance</b>		+1.4 0			
<b>Piping</b>	<b>Screw-in type</b>	Rc 1/8			
	<b>Built-in One-touch fitting</b>	O.D.: ø6/I.D.: ø4			
<b>Manual override</b>		Non locking (Standard)			
<b>Piston speed (mm/s)</b>		50 to 700	50 to 650	50 to 590	50 to 420
<b>Allowable kinetic energy</b>		0.27 J	0.4 J	0.65 J	1.2 J
<b>Mounting</b>		Basic type, Axial foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Head side trunnion type, Rod side trunnion type			

## Solenoid Valve Specifications

Applicable solenoid valve model		VZ319	
<b>Coil rated voltage</b>		Standard: 100/200 VAC (50/60 Hz), 24 VDC Semi-standard: 110/220 VAC, 12 VDC	
<b>Effective area of valve (Cv factor)</b>		4.5 mm <sup>2</sup> (0.25)	
<b>Allowable voltage</b>		-15 to 10% of the rated voltage	
<b>Coil insulation</b>		Class B or equivalent (130°C)	
<b>Electrical entry</b>		Grommet, L plug connector, M plug connector, DIN terminal	
<b>Power consumption (W)</b> <sup>Note)</sup>	<b>DC</b>	1.8 (With indicator light: 2.1)	
<b>power (VA)</b> <sup>Note)</sup>	<b>AC</b>	<b>Inrush</b>	4.5/50 Hz, 4.2/60 Hz
		<b>Holding</b>	3.5/50 Hz, 3.0/60 Hz

Note) At the rated voltage.

## Standard Stroke

Bore size (mm)	Standard stroke (mm) <sup>Note)</sup>
<b>20</b>	25, 50, 75, 100, 125, 150 *
<b>25</b>	25, 50, 75, 100, 125, 150 *
<b>32</b>	25, 50, 75, 100, 125, 150, 200 *
<b>40</b>	25, 50, 75, 100, 125, 150, 200, 250 *

Note 1) Intermediate stroke except mentioned above is produced upon receipt of order.  
Note 2) Strokes marked with "\*" are the maximum strokes which are available.

## Theoretical Output

Refer to the Technical Data (Theoretical Output 1) in Best Pneumatics No. 2-1.

## Spring Reaction Force

Refer to the Technical Data (Table 2: Spring Reaction Force) in Best Pneumatics No. 2-1.

**CVQ**

**CVQM**

**CVJ** □

**CVM** □

**CV3**

**CVS1**

**MVGQ**

**D**-□

**-X**□

# CVM3 Series

## Mounting Bracket and Accessory

Accessory	Standard equipment			Option			
	Mounting nut	Rod end nut	Clevis pin	Single knuckle joint	Double knuckle joint <sup>(3)</sup>	Pivot bracket <sup>(5)</sup>	Pivot bracket pin <sup>(6)</sup>
Mounting							
Basic type	● (1 pc.)	●	—	●	●		
Axial foot type	● (2)	●	—	●	●		
Rod side flange type	● (1)	●	—	●	●		
Head side flange type	● (1)	●	—	●	●		
Single clevis type	— <sup>(1)</sup>	●	—	●	●	●	●
Double clevis type <sup>(3)</sup>	— <sup>(1)</sup>	●	● <sup>(4)</sup>	●	●	—	—
Head side trunnion type	● (1) <sup>(2)</sup>	●	—	●	●		
Rod side trunnion type	● (1) <sup>(2)</sup>	●	—	●	●	●	—

Note 1) Mounting nut is not equipped with single clevis type and double clevis type.

Note 2) Trunnion nuts are equipped for head side trunnion and rod side trunnion.

Note 3) Pin and retaining ring are shipped together with double clevis and double knuckle joint.

Note 4) Retaining rings (cotter pins for ø40) are included in clevis pins.

Note 5) Pin and retaining ring are not included in pivot bracket.

Note 6) Retaining rings are included in pivot bracket pin.

## Weight

Spring Return/( ): Denotes Spring Extend.

Bore size (mm)		20	25	32	40
Basic weight	25 stroke	0.30 (0.30)	0.40 (0.04)	0.52 (0.51)	0.87 (0.86)
	50 stroke	0.32 (0.32)	0.43 (0.43)	0.56 (0.56)	0.94 (0.93)
	75 stroke	0.37 (0.37)	0.52 (0.51)	0.68 (0.66)	1.13 (1.09)
	100 stroke	0.39 (0.39)	0.55 (0.54)	0.73 (0.70)	1.19 (1.16)
	125 stroke	0.45 (0.44)	0.64 (0.61)	0.86 (0.82)	1.39 (1.33)
	150 stroke	0.47 (0.46)	0.67 (0.64)	0.90 (0.86)	1.46 (1.40)
	200 stroke	— (—)	— (—)	1.07 (1.02)	1.71 (1.63)
	250 stroke	— (—)	— (—)	— (—)	1.97 (1.85)
Mounting bracket weight	Axial foot	0.15 (0.15)	0.16 (0.16)	0.16 (0.16)	0.27 (0.27)
	Flange	0.06 (0.06)	0.09 (0.09)	0.09 (0.09)	0.12 (0.12)
	Single clevis	0.04 (0.04)	0.04 (0.04)	0.04 (0.04)	0.09 (0.09)
	Double clevis	0.05 (0.05)	0.06 (0.06)	0.06 (0.06)	0.13 (0.13)
Option bracket	Trunnion	0.04 (0.04)	0.07 (0.07)	0.07 (0.07)	0.10 (0.10)
	Single knuckle joint	0.06 (0.06)	0.06 (0.06)	0.06 (0.06)	0.23 (0.23)
	Double knuckle (With pin)	0.07 (0.07)	0.07 (0.07)	0.07 (0.07)	0.20 (0.20)


Calculation: (Example) **CVM3L32-100-1G**  
 (ø32, 100 stroke, Spring return)  
 • Basic weight:.....0.73 (kg)  
 • Weight of brackets:.....0.16 (kg)  
 0.73 + 0.16 = 0.89 kg

## Accessory Bracket

Further information on accessories are the same specifications as these of the standard double acting single rod. Refer to page 786.

## Manual Operation

Manual operation is possible by pushing the manual button indicated with the arrow.



## ⚠️ Precautions

**Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, pages 3 to 12 for Actuator and Auto Switch Precautions, and 3/4/5 Port Solenoid Valve Precautions in Best Pneumatics No. 1-1.**

### Operating Precautions

#### ⚠️ Warning

##### 1. Do not rotate the cover.

If a cover is rotated when installing a cylinder or screwing a fitting into port, it is likely to damage the junction part with cover.

#### ⚠️ Caution

##### 1. Not able to disassemble.

Cover and cylinder tube are connected to each other by caulking method, thus making it impossible to disassemble. Therefore, internal parts of a cylinder other than rod seal are not replaceable.

##### 2. Use caution to the popping of a retaining ring.

When replacing rod seals and removing and mounting a retaining ring, use a proper tool (retaining ring plier: tool for installing type C retaining ring). Even if a proper tool is used, it is likely to inflict damage to a human body or peripheral equipment, as a retaining ring may be flown out of the tip of a plier. Be much careful with the popping of a retaining ring. Besides, be certain that a retaining ring is placed firmly into the groove of rod cover before supplying air at the time of installment.

#### ⚠️ Caution

##### 3. Do not touch the cylinder during operation.

Use caution when handling a cylinder, which is running at a high speed and a high frequency, because the surface of a cylinder tube could get so hot enough as to cause you get burned.

##### 4. One-touch fitting cannot be replaced.

One-touch fitting is press-fit into the cover, thus cannot be replaced.

### Model Selection

#### ⚠️ Warning

##### 1. Confirm the specifications.

Products in this catalog are designed to be used for compressed air systems (including vacuum). If not operated within the designated pressure or temperature, it may damage the products or cause malfunction. (Refer to specifications.)

##### 2. Energizing continuously for a long period of time

When the valve is continuously energized for a long period of time, the performance may deteriorate, shorten the service life or affect peripheral equipment adversely since temperature rises when coils generate heat.

## Built-in One-touch Fitting

CVM3   F —   
 ↓ Built-in One-touch fitting

One-touch fittings are installed on cylinders.



For dimensions of each mounting bracket, refer to pages 796 to 802.

## Specifications

Action	Single acting, Spring return	Single acting, Spring extend		
Bore size (mm)	ø20, ø25, ø32, ø40			
Max. operating pressure	0.7 MPa			
Min. operating pressure	0.18 MPa	0.23 MPa		
Cushion	Rubber bumper			
Piping	Built-in One-touch fitting			
Piston speed (mm/s)	ø20	ø25	ø32	ø40
	50 to 700	50 to 650	50 to 590	50 to 420
Port size (Tube bore size)	O.D.: ø6/I.D.: ø4			
Applicable bore size	Can be used for either nylon, soft nylon or polyurethane tube.			
Mounting	Basic type, Axial foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Head side trunnion type, Rod side trunnion type			

CVQ

CVQM

CVJ

CVM

CV3

CVS1

MVGQ

## Mounting Bracket Part No.

Bore size (mm)	20	25	32	40
Axial foot *	CM-L020B	CM-L032B	CM-L040B	CM-L040B
Flange	CM-F020B	CM-F032B	CM-F040B	CM-F040B
Single clevis	CM-C020B	CM-C032B	CM-C040B	CM-C040B
Double clevis **	CM-D020B	CM-D032B	CM-D040B	CM-D040B
Trunnion (with nut)	CM-T020B	CM-T032B	CM-T040B	CM-T040B

\* Two foot brackets and a mounting nut are attached.

When ordering the foot bracket, order 2 pcs. per cylinder.

\*\* Clevis pin and retaining ring (cotter pin for ø40) are packaged together.

D-


-X






**Basic Type (B)**


Single acting, Spring return: CVM3B  —  S

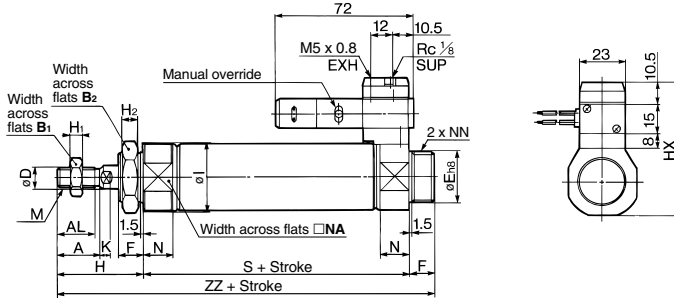

Single acting, Spring extend: CVM3B  —  T

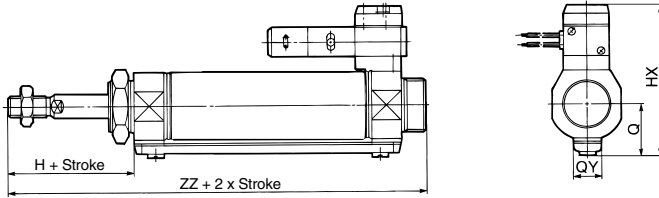

**Built-in One-touch fitting**



Bore size (mm)	A	AL	B <sub>1</sub>	B <sub>2</sub>	D	Eh <sub>8</sub>	F	H	H <sub>1</sub>	H <sub>2</sub>	HX	I	K	MM	N	NA	NN
20	18	15.5	13	26	8	20 <sup>0.023</sup>	13	41	5	8	57.5	28	5	M8 x 1.25	15	24	M20 x 1.5
25	22	19.5	17	32	10	26 <sup>0.033</sup>	13	45	6	8	63.5	33.5	5.5	M10 x 1.25	15	30	M26 x 1.5
32	22	19.5	17	32	12	26 <sup>0.033</sup>	13	45	6	8	68	37.5	5.5	M10 x 1.25	15	34.5	M26 x 1.5
40	24	21	22	41	14	32 <sup>0.039</sup>	16	50	8	10	76	46.5	7	M14 x 1.5	21.5	42.5	M32 x 2

Dimensions by Stroke		(mm)									
Bore size (mm)	Stroke	1 to 50		51 to 100		101 to 150		151 to 200		201 to 250	
	Stroke	S	ZZ	S	ZZ	S	ZZ	S	ZZ	S	ZZ
20	87	141	112	166	137	191	—	—	—	—	—
25	87	145	112	170	137	195	—	—	—	—	—
32	89	147	114	172	139	197	164	222	—	—	—
40	113	179	138	204	163	229	188	254	213	279	—

Single Acting/Spring Extend (mm)			
Bore size (mm)	HX	Q	QY
20	65.3	19.8	14
25	70.5	22	14
32	76.5	25.8	16
40	84.5	29.8	16

CVQ

CVQM

CVJ

CVM

CV3

CVS1

MVGQ


D-

-X


# CVM3 Series

## Axial Foot Type (L)

Single acting, Spring return: CVM3L  —  S

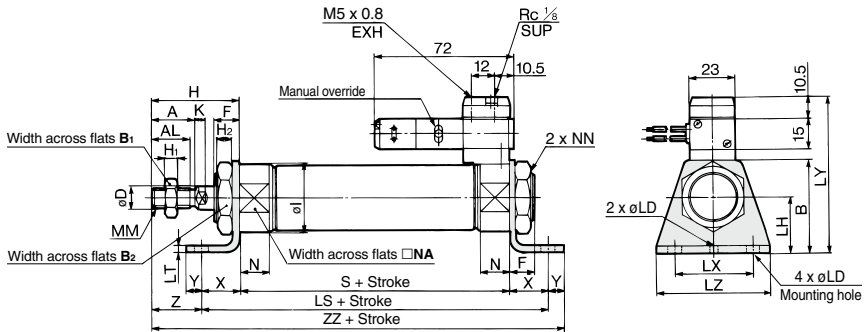

Single acting, Spring extend: CVM3L  —  T

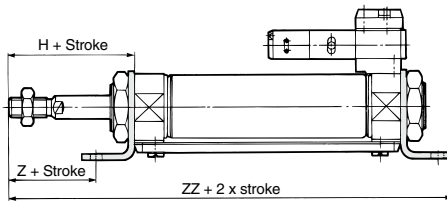

Bore size (mm)	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	D	F	H	H <sub>1</sub>	H <sub>2</sub>	I	K	LC	LD	LH	LT	LX	LY	LZ	MM	N	NA
20	18	15.5	40	13	26	8	13	41	5	8	28	5	4	6.8	25	3.2	40	70.5	55	M8 x 1.25	15	24
25	22	19.5	47	17	32	10	13	45	6	8	33.5	5.5	4	6.8	28	3.2	40	76.5	55	M10 x 1.25	15	30
32	22	19.5	47	17	32	12	13	45	6	8	37.5	5.5	4	6.8	28	3.2	40	78.8	55	M10 x 1.25	15	34.5
40	24	21	54	22	41	14	16	50	8	10	46.5	7	4	7	30	3.2	55	84.8	75	M14 x 1.5	21.5	42.5

Bore size (mm)	NN	X	Y	Z
20	M20 x 1.5	20	8	21
25	M26 x 1.5	20	8	25
32	M26 x 1.5	20	8	25
40	M32 x 2	23	10	27


### Dimensions by Stroke

Bore size (mm)	Stroke (mm)											
	1 to 50	51 to 100	101 to 150	151 to 200	201 to 250							
	S	LS	ZZ	S	LS	ZZ	S	LS	ZZ	S	LS	ZZ
20	87	127	156	112	152	181	137	177	206	—	—	—
25	87	127	160	112	152	185	137	177	210	—	—	—
32	89	129	162	114	154	187	139	179	212	164	204	237
40	113	159	196	138	184	221	163	209	246	188	234	271

\* Brackets are packaged together.


**Rod Side Flange Type (F)**

Single acting, Spring return: CVM3F  —  S

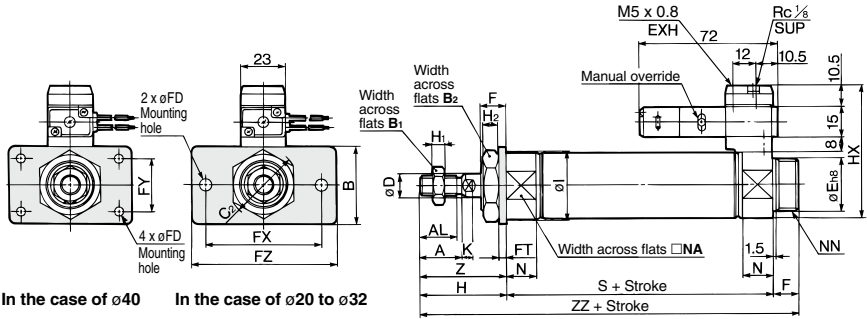

In the case of  $\phi 40$       In the case of  $\phi 20$  to  $\phi 32$

Single acting, Spring extend: CVM3F  —  T

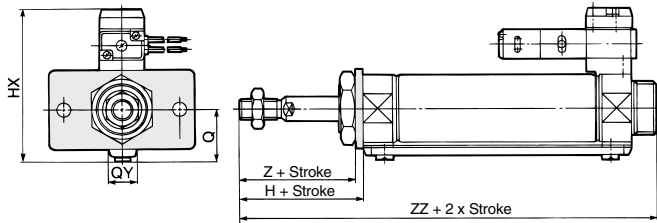

Bore size (mm)	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	C <sub>2</sub>	D	Eh <sub>8</sub>	F	FD	FT	FX	FY	FZ	H	H <sub>1</sub>	H <sub>2</sub>	HX	I	K
20	18	15.5	34	13	26	30	8	20 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	41	5	8	57.5	28	5
25	22	19.5	40	17	32	37	10	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	45	6	8	63.5	33.5	5.5
32	22	19.5	40	17	32	37	12	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	45	6	8	68	37.5	5.5
40	24	21	52	22	41	47.3	14	32 <sup>0</sup> <sub>-0.039</sub>	16	7	5	66	36	82	50	8	10	76	46.5	7

Bore size (mm)	MM	N	NA	NN	Z	Dimensions by Stroke (mm)										Single Acting/Spring Extend (mm)					
						1 to 50		51 to 100		101 to 150		151 to 200		201 to 250		Bore size (mm)	HX	Q	QY		
						Bore size (mm)	Stroke Symbol	S	ZZ	S	ZZ	S	ZZ	S	ZZ	S	ZZ				
20	M8 x 1.25	15	24	M20 x 1.5	37	20	S	87	141	112	166	137	191	—	—	—	—	20	65.3	19.8	14
25	M10 x 1.25	15	30	M26 x 1.5	41	25	S	87	145	112	170	137	195	—	—	—	—	25	70.5	22	14
32	M10 x 1.25	15	34.5	M26 x 1.5	41	32	S	89	147	114	172	139	197	164	222	—	—	32	76.5	25.8	16
40	M14 x 1.5	21.5	42.5	M32 x 2	45	40	S	113	179	138	204	163	229	188	254	213	279	40	84.5	29.8	16

\* Brackets are packaged together.

CVQ

CVMQ

CVJ

CVM

CV3

CVS1

MVGQ


D-

-X


# CVM3 Series

## Head Side Flange Type (G)

Single acting, Spring return: CVM3G  —  S

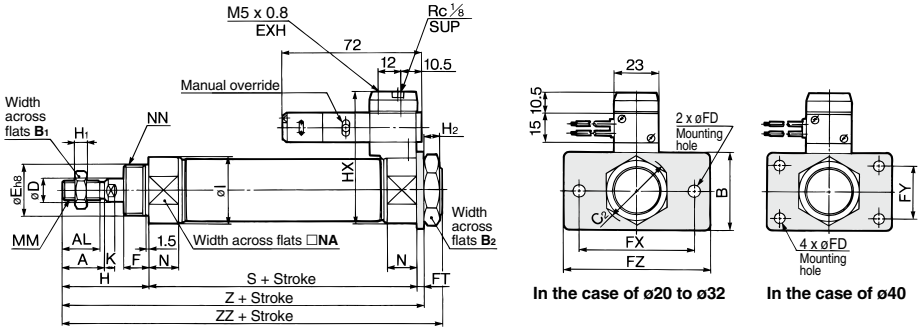

Single acting, Spring extend: CVM3G  —  T

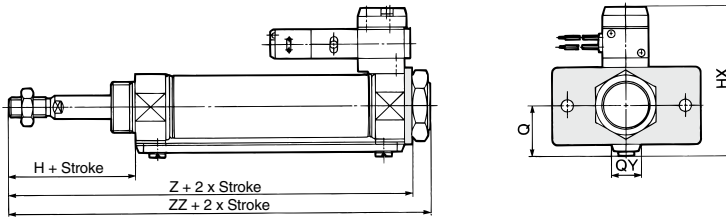

Bore size (mm)	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	C <sub>2</sub>	D	Eh <sub>6</sub>	F	FD	FT	FX	FY	FZ	H	H <sub>1</sub>	H <sub>2</sub>	HX	I	K	MM
20	18	15.5	34	13	26	30	8	20 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	41	5	8	57.5	28	5	M8 x 1.25
25	22	19.5	40	17	32	37	10	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	45	6	8	63.5	33.5	5.5	M10 x 1.25
32	22	19.5	40	17	32	37	12	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	45	6	8	68	37.5	5.5	M10 x 1.25
40	24	21	52	22	41	47.3	14	32 <sup>0</sup> <sub>-0.039</sub>	16	7	5	66	36	82	50	8	10	76	46.5	7	M14 x 1.5


Bore size (mm)	(mm)			Dimensions by Stroke (mm)												Single Acting/Spring Extend (mm)						
	N	NA	NN	1 to 50			51 to 100			101 to 150			151 to 200			201 to 250			Bore size (mm)	HX	Q	QY
Stroke Symbol	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	20	25	32	40
20	15	24	M20 x 1.5	87	132	141	112	157	166	137	182	191	—	—	—	—	—	—	20	65.3	19.8	14
25	15	30	M26 x 1.5	87	136	145	112	161	170	137	186	195	—	—	—	—	—	—	25	70.5	22	14
32	15	34.5	M26 x 1.5	89	138	147	114	163	172	139	188	197	164	213	222	—	—	—	32	76.5	25.8	16
40	21.5	42.5	M32 x 2	113	168	179	138	193	204	163	218	229	188	243	254	213	268	279	40	84.5	29.8	16

\* Brackets are packaged together.


# Valve Mounted Cylinder Single Acting, Spring Return/Extend **CVM3 Series**

## Single Clevis Type (C)

Single acting, Spring return: CVM3C Bore size — Stroke S

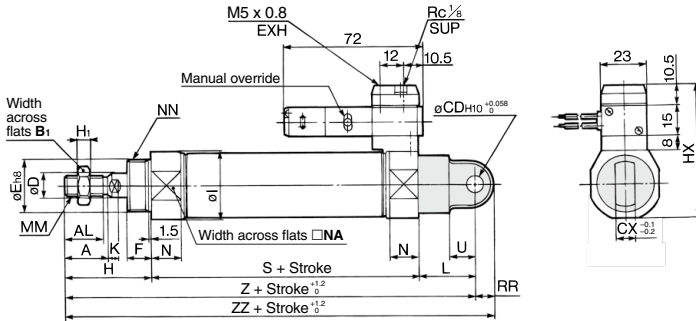

Single acting, Spring extend: CVM3C Bore size — Stroke T

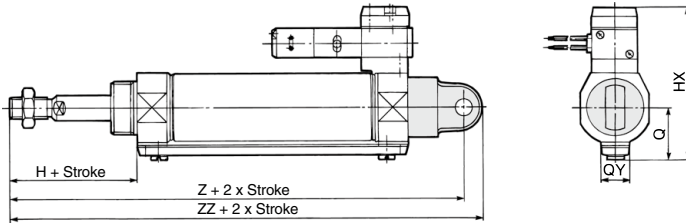

Bore size (mm)	A	AL	B <sub>1</sub>	CD	CX	D	E <sub>h</sub>	F	H	H <sub>1</sub>	HX	I	K	L	MM	N	NA	NN	RR	U
20	18	15.5	13	9	10	8	20 <sup>0</sup> <sub>-0.033</sub>	13	41	5	57.5	28	5	30	M8 x 1.25	15	24	M20 x 1.5	9	14
25	22	19.5	17	9	10	10	26 <sup>0</sup> <sub>-0.033</sub>	13	45	6	63.5	33.5	5.5	30	M10 x 1.25	15	30	M26 x 1.5	9	14
32	22	19.5	17	9	10	12	26 <sup>0</sup> <sub>-0.033</sub>	13	45	6	68	37.5	5.5	30	M10 x 1.25	15	34.5	M26 x 1.5	9	14
40	24	21	22	10	15	14	32 <sup>0</sup> <sub>-0.039</sub>	16	50	8	76	46.5	7	39	M14 x 1.5	21.5	42.5	M32 x 2	11	18

### Dimensions by Stroke

Bore size (mm)	1 to 50		51 to 100		101 to 150		151 to 200		201 to 250			
	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ
20	87	158	167	112	183	192	137	208	217	—	—	—
25	87	162	171	112	187	196	137	212	221	—	—	—
32	89	164	173	114	189	198	139	214	223	164	239	248
40	113	202	213	138	227	238	163	252	263	188	277	288

### Single Acting/Spring Extend

Bore size (mm)	HX	Q	QY
20	65.3	19.8	14
25	70.5	22	14
32	76.5	25.8	16
40	84.5	29.8	16

CVQ

CVQM

CVJ

CVM

CVS


CVS1

MVGQ


# CVM3 Series

## Double Clevis Type (D)

Single acting, Spring return: CVM3D **Bore size** — **Stroke** **S**

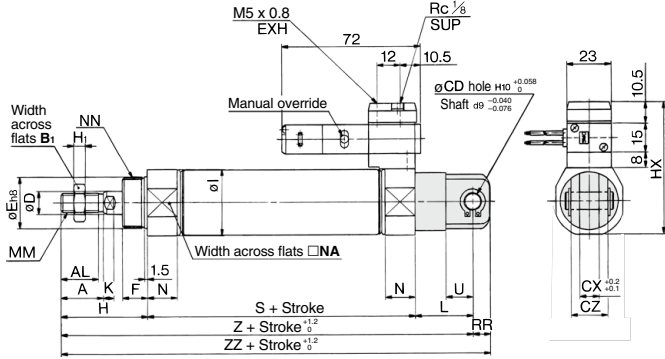

Single acting, Spring extend: CVM3D **Bore size** — **Stroke** **T**

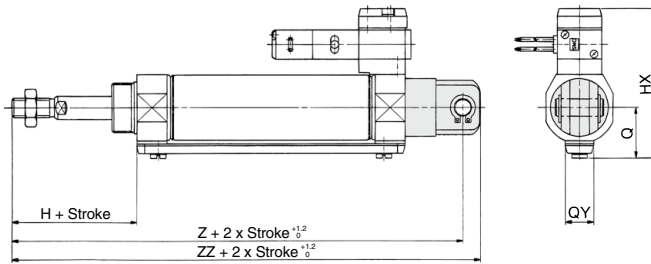

Bore size (mm)	A	AL	B <sub>1</sub>	CD	CX	CZ	D	Eh <sub>8</sub>	F	H	H <sub>1</sub>	HX	I	K	L	MM	N	NA	NN	RR	U
20	18	15.5	13	9	10	19	8	20 <sup>0</sup> <sub>-0.033</sub>	13	41	5	57.5	28	5	30	M8 x 1.25	15	24	M20 x 1.5	9	14
25	22	19.5	17	9	10	19	10	26 <sup>0</sup> <sub>-0.033</sub>	13	45	6	63.5	33.5	5.5	30	M10 x 1.25	15	30	M26 x 1.5	9	14
32	22	19.5	17	9	10	19	12	26 <sup>0</sup> <sub>-0.033</sub>	13	45	6	68	37.5	5.5	30	M10 x 1.25	15	34.5	M26 x 1.5	9	14
40	24	21	22	10	15	30	14	32 <sup>0</sup> <sub>-0.033</sub>	16	50	8	76	46.5	7	39	M14 x 1.5	21.5	42.5	M32 x 2	11	18

### Dimensions by Stroke

Bore size (mm)	Stroke (mm)																				
	1 to 50				51 to 100				101 to 150				151 to 200				201 to 250				
Symbol	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ
20	87	158	167	112	183	192	137	208	217	—	—	—	—	—	—	—	—	—	—	—	—
25	87	162	171	112	187	196	137	212	221	—	—	—	—	—	—	—	—	—	—	—	—
32	89	164	173	114	189	198	139	214	223	164	239	248	—	—	—	—	—	—	—	—	—
40	113	202	213	138	227	238	163	252	263	188	277	288	213	302	313	—	—	—	—	—	—

### Single Acting/Spring Extend (mm)

Bore size (mm)	HX	Q	QY
20	65.3	19.8	14
25	70.5	22	14
32	76.5	25.8	16
40	84.5	29.8	16

\* Clevis pin and snap ring (cotter pin for  $\varnothing 40$ ) is shipped together.







# CVM3 Series

## Head Side Trunnion Type (T)

Single acting, Spring return: CVM3T  —  S

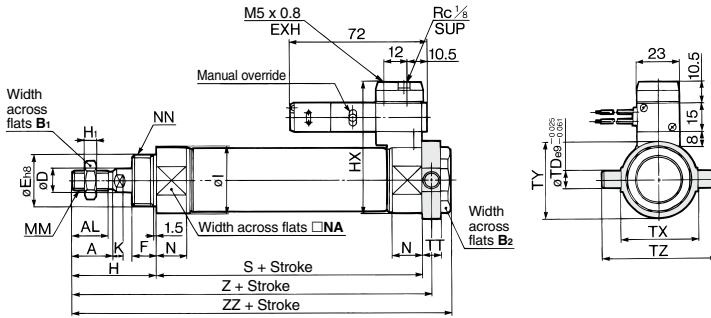

Single acting, Spring extend: CVM3T  —  T

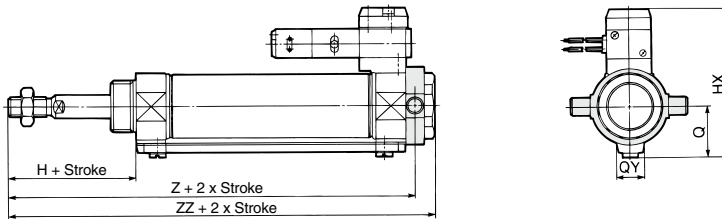

Bore size (mm)	A	AL	B <sub>1</sub>	B <sub>2</sub>	D	Eh <sub>8</sub>	F	H	H <sub>1</sub>	HX	I	K	MM	N	NA	NN	TD	TT	TX	TY	TZ
20	18	15.5	13	26	8	20 <sup>0</sup> <sub>-0.033</sub>	13	41	5	57.5	28	5	M8 x 1.25	15	24	M20 x 1.5	8	10	32	32	52
25	22	19.5	17	32	10	26 <sup>0</sup> <sub>-0.033</sub>	13	45	6	63.5	33.5	5.5	M10 x 1.25	15	30	M26 x 1.5	9	10	40	40	60
32	22	19.5	17	32	12	26 <sup>0</sup> <sub>-0.033</sub>	13	45	6	68	37.5	5.5	M10 x 1.25	15	34.5	M26 x 1.5	9	10	40	40	60
40	24	21	22	41	14	32 <sup>0</sup> <sub>-0.029</sub>	16	50	8	76	46.5	7	M14 x 1.5	21.5	42.5	M32 x 2	10	11	53	53	77

### Dimensions by Stroke

Bore size (mm)	Stroke Symbol		1 to 50			51 to 100			101 to 150			151 to 200			201 to 250		
	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ		
20	87	133	143	112	158	168	137	183	193	—	—	—	—	—	—		
25	87	137	147	112	162	172	137	187	197	—	—	—	—	—	—		
32	89	139	149	114	164	174	139	189	199	164	214	224	—	—	—		
40	113	168.5	179	138	193.5	204	163	218.5	229	188	243.5	254	213	268.5	279		

### Single Acting/Spring Extend (mm)

Bore size (mm)	HX	Q	QY
20	65.3	19.8	14
25	70.5	22	14
32	76.5	25.8	16
40	84.5	29.8	16

\* Brackets are packaged together.

# Valve Mounted Cylinder: Non-rotating Rod Type

## Single Acting, Spring Return/Extend

# CVM3K Series

ø20, ø25, ø32, ø40

### How to Order

**Mounting type**

B	Basic type
L	Axial foot type
F	Rod side flange type
G	Head side flange type
C	Single clevis type
D	Double clevis type
T	Head side trunnion type
U	Rod side trunnion type

**Bore size**

20	20 mm
25	25 mm
32	32 mm
40	40 mm

**Solenoid valve voltage**

Standard		Option	
1	100 VAC (50/60 Hz)	3	110 VAC (50/60 Hz)
2	200 VAC (50/60 Hz)	4	220 VAC (50/60 Hz)
5	24 VDC	6	12 VDC

For other rated voltages, please consult with SMC.

**Action**

S	Single acting, Spring return
T	Single acting, Spring extend

**Light/Surge voltage suppressor**

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor (Except Type G)

**Electrical entry**

G	Grommet
L	L plug connector
M	M plug connector
D	DIN terminal

**Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

**Auto switch**

Nil	Without auto switch
-----	---------------------

**Port thread type**

Nil	Rc
TN	NPT
TF	G

**Piping**

Nil	Screw-in type
F	Built-in One-touch fitting

**Auto switch mounting bracket** <sup>(Note)</sup>

Note) This symbol is indicated when the D-A9□ or M9□ type auto switch is specified. This mounting bracket does not apply to other auto switches (D-C7□ and H7□, etc.) (Nil)

**Example Order Codes:**

**CVM3K** **L** **20** **□** **□** **-** **100** **T** **-** **1** **L** **□** **-** **□**

**CDVM3K** **L** **20** **□** **□** **-** **100** **T** **-** **1** **L** **□** **-** **M9BW** **□** **-** **C** **-** **□**

**With auto switch (Built-in magnet)**

**Non-rotating rod type**

**Built-in Magnet Cylinder Model**

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDVM3K40-100S-5G

**Cylinder stroke (mm)** \* For the applicable auto switch model, refer to the table below.  
(Refer to "Standard Stroke" on page 804.)

- CVQ
- CVMQ
- CVJ
- CVM
- CV3
- CVS1
- MVGQ

### Applicable Auto Switches

Refer to pages 941 to 1067 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load					
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)		None (N)	IC circuit	Relay, PLC			
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	—			IC circuit	Relay, PLC	
				3-wire (PNP)			M9PV	M9P	●	●	●	○	○						
		Connector		2-wire	M9BV	M9B	●	●	●	○	○	○	○	—	—				
				—	—	H7C	●	●	●	●	—	—	—	—					
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9NVV	M9NV	●	●	●	○	○	○	○	IC circuit			
				3-wire (PNP)			M9PVV	M9PV	●	●	●	○	○	○	○	○	IC circuit		
	Water resistant (2-color indicator)	Grommet		2-wire	5 V, 12 V	—	M9BWW	M9BW	●	●	●	○	○	○	○	—			
				3-wire (NPN)			M9NAV <sup>*1</sup>	M9NA <sup>*1</sup>	○	○	○	●	●	○	○	IC circuit			
	With diagnostic output (2-color indicator)	Grommet	3-wire (PNP)	5 V, 12 V	—	M9PAV <sup>*1</sup>	M9PA <sup>*1</sup>	○	○	○	○	○	○	○	○	IC circuit			
			2-wire			M9BAV <sup>*1</sup>	M9BA <sup>*1</sup>	○	○	○	○	○	○	○	○	—			
Reed auto switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	H7FN	●	●	●	○	○	○	○	IC circuit			
				2-wire			24 V	12 V	A96V	A96	●	●	●	○	○	○	○	IC circuit	
									100 V	A93V <sup>*2</sup>	A93	●	●	●	○	○	○	○	—
				2-wire			24 V	12 V	100 V or less	A90V	A90	●	●	●	○	○	○	○	IC circuit
									100 V, 200 V	—	B54	●	●	●	○	○	○	○	—
				2-wire			24 V	12 V	200 V or less	—	B64	●	●	●	○	○	○	○	—
24 V or less	—	C73C	●		●	●			○	○	○	○	IC circuit						
Diagnostic indication (2-color indicator)	Grommet	Yes	—	—	—	—	B59W	●	●	●	○	○	○	○	—				

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
 1 m ..... M (Example) M9NWM  
 3 m ..... L (Example) M9NWL  
 5 m ..... Z (Example) M9NWZ  
 None ..... N (Example) H7CN

\* Solid state auto switches marked with "○" are produced upon receipt of order.  
 \* D-A9□/M9□/V□/M9□/WW□/M9□/A□ types cannot be mounted.  
 \*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.  
 \*2 1 m type lead wire is only applicable to D-A93.

\* Since there are other applicable auto switches than listed, refer to page 811 for details.  
 \* For details about auto switches with pre-wired connector, refer to pages 1014 and 1015.  
 \* D-A9□/M9□/M9□/WW□ auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled before shipped.)



- D-□
- X□

# CVM3K Series

**A hexagon shaped rod that does not rotate.**

## Non-rotating accuracy

∅20, ∅25 — ±0.7°

∅32, ∅40 — ±0.5°



**Can operate without lubrication.**

**Auto switches can also be mounted.**

Can be installed with auto switches to facilitate the detection of the cylinder's stroke position.



**Symbol**  
Rubber bumper



**Made to Order Specifications**  
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC6	Made of stainless steel

## Mounting Bracket Part No.

Bore size (mm)	20	25	32	40
Axial foot*	CM-L020B	CM-L032B	CM-L040B	CM-L040B
Flange	CM-F020B	CM-F032B	CM-F040B	CM-F040B
Single clevis	CM-C020B	CM-C032B	CM-C040B	CM-C040B
Double clevis**	CM-D020B	CM-D032B	CM-D040B	CM-D040B
Trunnion (With nut)	CM-T020B	CM-T032B	CM-T040B	CM-T040B

\* Two foot brackets and a mounting nut are attached.  
When ordering the foot bracket, order 2 pcs. per cylinder.

\*\* Clevis pin and retaining ring (cotter pin for ∅40) are packaged together.

## Specifications

Applicable bore size (mm)	20	25	32	40
Rod non-rotating accuracy	±0.7°		±0.5°	
Action	Single acting, Spring return/Spring extend			
Fluid	Air			
Cushion	Rubber bumper			
Proof pressure	1.0 MPa			
Maximum operating pressure	0.7 MPa			
Minimum operating pressure	0.18 MPa spring return	0.23 MPa spring extend		
Ambient and fluid temperature	-10 to 50°C (No freezing)			
Lubrication	Not required (Non-lube)			
Stroke length tolerance	+1.4 0			
Piping	Screw-in type	Rc 1/8		
	Built-in One-touch fitting	O.D.: ∅6/I.D.: ∅4		
Manual override	Non locking (Standard)			
Piston speed (mm/s)	50 to 700	50 to 650	50 to 590	50 to 420
Allowable kinetic energy	0.27 J	0.4 J	0.65 J	1.2 J
Mounting	Basic type, Axial foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Head side trunnion type, Rod side trunnion type			

## Solenoid Valve Specifications

Applicable solenoid valve model	VZ319		
Coil rated voltage	Standard: 100/200 VAC (50/60 Hz), 24 VDC Semi-standard: 110/220 VAC, 12 VDC		
Effective area of valve (Cv factor)	4.5 mm <sup>2</sup> (0.25)		
Allowable voltage	-15 to 10% of the rated voltage		
Coil insulation	Class B or equivalent (130°C)		
Electrical entry	Grommet, L plug connector, M plug connector, DIN terminal		
Power consumption (W) <small>(Note)</small>	DC	1.8 (With indicator light: 2.1)	
Apparent power (VA) <small>(Note)</small>	AC	Inrush	4.5/50 Hz, 4.2/60 Hz
		Holding	3.5/50 Hz, 3.0/60 Hz

Note) At the rated voltage.

## Standard Stroke

Bore size (mm)	Standard stroke (mm) <small>(Note)</small>
20	25, 50, 75, 100, 125, 150 *
25	25, 50, 75, 100, 125, 150 *
32	25, 50, 75, 100, 125, 150, 200 *
40	25, 50, 75, 100, 125, 150, 200, 250 *

Note 1) Intermediate stroke other than above is manufactured upon receipt of order.

Note 2) Strokes marked with "\*" are the maximum strokes which are available.

Refer to pages 808 to 811 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Auto switch mounting bracket: Part no.

## Theoretical Output

Refer to the Technical Data (Theoretical Output 1) in Best Pneumatics No. 2-1.

## Spring Reaction Force

Refer to the Technical Data (Table 2: Spring Reaction Force) in Best Pneumatics No. 2-1.

# Valve Mounted Cylinder: Non-rotating Rod Type Single Acting, Spring Return/Extend **CVM3K Series**

## Mounting Bracket and Accessory

	Accessory		Standard equipment			Option		
	Mounting nut	Rod end nut	Clevis pin	Single knuckle joint	Double knuckle joint <sup>(3)</sup>	Pivot bracket <sup>(5)</sup>	Pivot bracket pin <sup>(6)</sup>	
Mounting								
Basic type	● (1 pc.)	●	—	●	●			
Axial foot type	● (2)	●	—	●	●			
Rod side flange type	● (1)	●	—	●	●			
Head side flange type	● (1)	●	—	●	●			
Single clevis type	— <sup>(1)</sup>	●	—	●	●	●	●	
Double clevis type <sup>(3)</sup>	— <sup>(1)</sup>	●	● <sup>(4)</sup>	●	●	—	—	
Head side trunnion type	● (1) <sup>(2)</sup>	●	—	●	●	●	—	
Rod side trunnion type	● (1) <sup>(2)</sup>	●	—	●	●		—	

Note 1) Mounting nut is not equipped with single clevis type and double clevis type.  
 Note 2) Trunnion nuts are equipped for head side trunnion and rod side trunnion.  
 Note 3) Pin and retaining ring are shipped together with double clevis and double knuckle joint.  
 Note 4) Retaining rings (cotter pins for ø40) are included in clevis pins.  
 Note 5) Pin and retaining ring are not included in pivot bracket.  
 Note 6) Retaining rings are included in pivot bracket pin.

## Weight

### Spring Return/( ): Denotes Spring Extend.


Bore size (mm)		20	25	32	40
Basic weight	25 stroke	0.30 (0.30)	0.40 (0.04)	0.52 (0.51)	0.87 (0.86)
	50 stroke	0.32 (0.32)	0.43 (0.43)	0.56 (0.56)	0.94 (0.93)
	75 stroke	0.37 (0.37)	0.52 (0.51)	0.68 (0.66)	1.13 (1.09)
	100 stroke	0.39 (0.39)	0.55 (0.54)	0.73 (0.70)	1.19 (1.16)
	125 stroke	0.45 (0.44)	0.64 (0.61)	0.86 (0.82)	1.39 (1.33)
	150 stroke	0.47 (0.46)	0.67 (0.64)	0.90 (0.86)	1.46 (1.40)
	200 stroke	— (—)	— (—)	1.07 (1.02)	1.71 (1.63)
	250 stroke	— (—)	— (—)	— (—)	1.97 (1.85)
Mounting bracket weight	Axial foot	0.15 (0.15)	0.16 (0.16)	0.16 (0.16)	0.27 (0.27)
	Flange	0.06 (0.06)	0.09 (0.09)	0.09 (0.09)	0.12 (0.12)
	Single clevis	0.04 (0.04)	0.04 (0.04)	0.04 (0.04)	0.09 (0.09)
	Double clevis	0.05 (0.05)	0.06 (0.06)	0.06 (0.06)	0.13 (0.13)
	Trunnion	0.04 (0.04)	0.07 (0.07)	0.07 (0.07)	0.10 (0.10)
Option bracket weight	Single knuckle joint	0.06 (0.06)	0.06 (0.06)	0.06 (0.06)	0.23 (0.23)
	Double knuckle (With pin)	0.07 (0.07)	0.07 (0.07)	0.07 (0.07)	0.20 (0.20)

Calculation: (Example) **CVM3K132-100-1G** (ø32, 100 stroke, Spring return)

- Basic weight ..... 0.73 (kg)
  - Weight of brackets ..... 0.16 (kg)
- 0.73 + 0.16 = 0.89 kg

## Manual Operation

Manual operation is possible by pushing the manual button indicated with the arrow.



## ⚠ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, pages 3 to 12 for Actuator and Auto Switch Precautions, and 3/4/5 Port Solenoid Valve Precautions in Best Pneumatics No. 1-1.


### Operating Precautions

#### ⚠ Caution

1. Avoid using the air cylinder in such a way that rotational torque would be applied to the piston rod.

If rotational torque is applied, the non-rotating guide will deform, causing a loss of non-rotating accuracy. Also, to screw a bracket or a nut onto the threaded portion at the end of the piston rod, make sure to retract the piston rod entirely, and place a wrench on the parallel sections of the rod that protrudes. To tighten, take precautions to prevent the tightening torque from being applied to the non-rotating guide.

Allowable rotational torque (N·m or less)	ø20	ø25	ø32	ø40
	0.2	0.25	0.25	0.44



### Disassembly/Replacement

#### ⚠ Caution

1. When replacing rod seals, please contact SMC.

Air leakage may be happened, depending on the position in which a rod seal is fitted. Thus, please contact SMC when replacing them.

### Model Selection

#### ⚠ Warning

1. Confirm the specifications.

Products in this catalog are designed to be used for compressed air systems. If not operated within the designated pressure or temperature, it may damage the products or cause malfunction. (Refer to specifications.)

2. Energizing continuously for a long period of time

When the valve is continuously energized for a long period of time, the performance may deteriorate or affect peripheral equipment adversely since temperature rises when coils generate heat.

CVQ

CVMQ

CVJ

CVM

CV3

CVS1

MVGQ


D-

-X



# CVM3K Series

## Construction


### Spring return

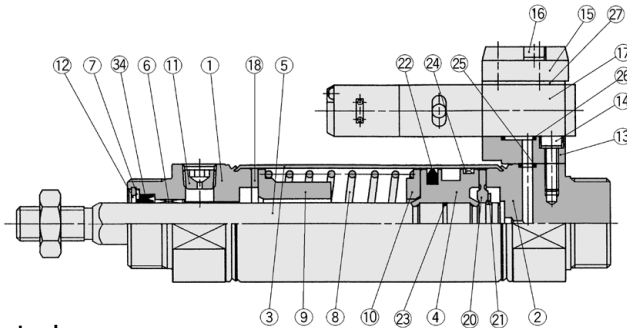

### Spring extend

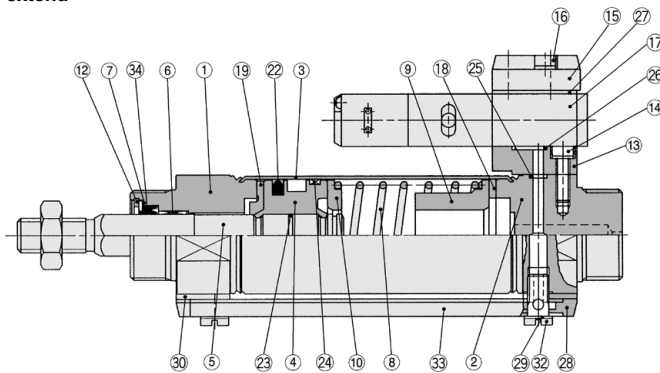

Built-in One-touch fitting



DIN terminal

### Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear anodized
2	Head cover	Aluminum alloy	Clear anodized
3	Cylinder tube	Stainless steel	
4	Piston	Aluminum alloy	Chromated
5	Piston rod	Carbon steel	Hard chrome plated
6	Non-rotating guide	Bearing alloy	
7	Seal retainer	Rolled steel	Nickel plated
8	Return spring	Steel wire	Zinc chromated
9	Spring guide	Aluminum alloy	Chromated
10	Spring seat	Aluminum alloy	Chromated
11	Plug with fixed orifice	Alloy steel	Black zinc chromated
12	Retaining ring	Carbon tool steel	Phosphate coated
13	Sub-plate	Aluminum alloy	Metallic painted
14	Hex. socket head cap screw with spring washer	Carbon steel	Nickel plated
15	Plate	Aluminum alloy	Metallic painted
16	Hex. socket head cap screw with spring washer	Carbon steel	Nickel plated
17	Solenoid valve	—	Refer to the below.*
18	Bumper	Urethane	
19	Bumper A	Urethane	

\* How to order solenoid valves

VZ319 - □□□□

Rated voltage ↓ □ □ □ □  
 ↓ Light/surge voltage suppressor  
 ↓ Electrical entry

### Component Parts

No.	Description	Material	Note
20	Bumper B	Urethane	
21	Retaining ring	Stainless steel	
22	Piston seal	NBR	
23	Piston gasket	NBR	
24	Wear ring	Resin	
25	Head cover gasket	NBR	
26	Sub-plate gasket	NBR	
27	Gasket	NBR	
28	Pipe gasket	Urethane rubber	
29	Gasket	Resin	
30	Spacer gasket	Resin	
31	One-touch fitting	—	Port size: ø6
32	Stud	Brass	Electroless nickel plated
33	Pipe	Aluminum alloy	Clear anodized

### Replacement Parts/Seal Kit

No.	Description	Material	Part no.			
			20	25	32	40
34	Rod seal	NBR	CM2K20-PS	CM2K25-PS	CM2K32-PS	CM2K40-PS


\* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10g)


# Valve Mounted Cylinder: Non-rotating Rod Type Single Acting, Spring Return/Extend **CVM3K Series**

## Basic Type (B): External Dimensions


Single acting, Spring return: CVM3KB **Bore size** — **Stroke** **S**

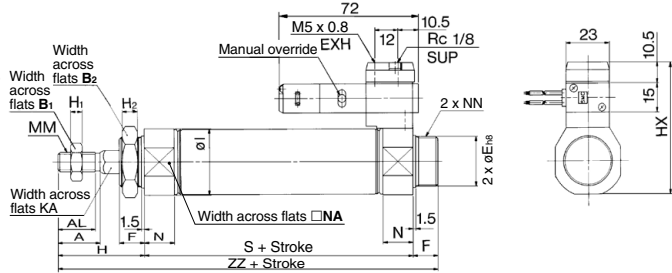

Single acting, Spring extend: CVM3KB **Bore size** — **Stroke** **T**

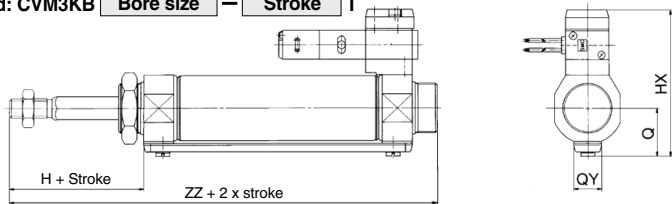

### Built-in One-touch fitting



Bore size (mm)	A	AL	B <sub>1</sub>	B <sub>2</sub>	Eh <sub>8</sub>	F	H	H <sub>1</sub>	H <sub>2</sub>	HX	I	KA	MM	N	NA	NN
20	18	15.5	13	26	20 <sup>0</sup> <sub>-0.033</sub>	13	41	5	8	57.5	28	8.2	M8 x 1.25	15	24	M20 x 1.5
25	22	19.5	17	32	26 <sup>0</sup> <sub>-0.033</sub>	13	45	6	8	63.5	33.5	10.2	M10 x 1.25	15	30	M26 x 1.5
32	22	19.5	17	32	26 <sup>0</sup> <sub>-0.033</sub>	13	45	6	8	68	37.5	12.2	M10 x 1.25	15	34.5	M26 x 1.5
40	24	21	22	41	32 <sup>0</sup> <sub>-0.033</sub>	16	50	8	10	76	46.5	14.2	M14 x 1.5	21.5	42.5	M32 x 2

Bore size (mm)	Dimensions by Stroke (mm)									
	1 to 50		51 to 100		101 to 150		151 to 200		201 to 250	
Symbol	S	ZZ	S	ZZ	S	ZZ	S	ZZ	S	ZZ
20	87	141	112	166	137	191	—	—	—	—
25	87	145	112	170	137	195	—	—	—	—
32	89	147	114	172	139	197	164	222	—	—
40	113	179	138	204	163	229	188	254	213	279

Bore size (mm)	Single Acting/Spring Extend (mm)		
	HX	Q	QY
20	65.3	19.8	14
25	70.5	22	14
32	76.5	25.8	16
40	84.5	29.8	16

CVQ

CVQM

CVJ

CVM

CV3

CVS1

MVGQ

D-


-X

# Auto Switch Mounting 1

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height


### Reed auto switch

**D-A9□**

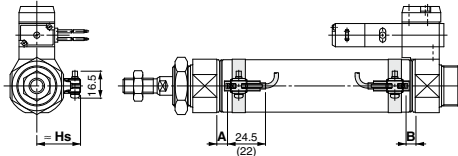


( ) : For D-A96 type  
A and B are the dimensions from the end of the head cover/rod cover to the end of the auto switch.


**D-C7/C8**

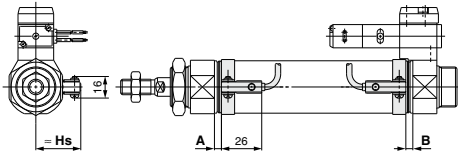

**D-B5/B6/B59W**

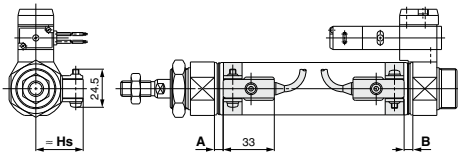


**D-C73C/C80C**

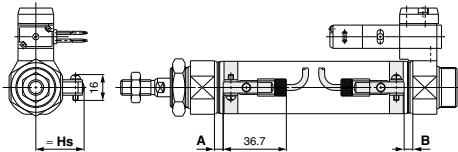


### Solid state auto switch


**D-M9□  
D-M9□W**

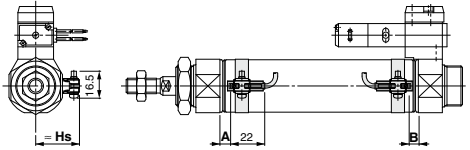


**D-H7□/H7□W/H7NF**

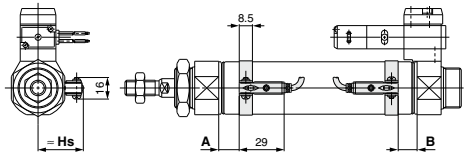

**D-G5NT**

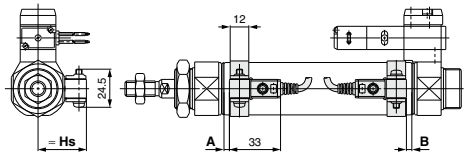

**D-H7C**

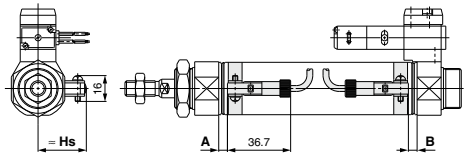

**Auto Switch Proper Mounting Position (Detection at Stroke End)  
and Its Mounting Height: Single Acting, Spring Return (S)/Spring Extend (T)**

**Auto Switch Proper Mounting Position: Standard, Spring Return (S)  
Non-Rotating, Spring Return (S)** (mm)

Auto switch model	Bore size	A dimension					B
		to 15 <sup>st</sup>	51 to 100 <sup>st</sup>	101 to 150 <sup>st</sup>	151 to 200 <sup>st</sup>	201 to 250 <sup>st</sup>	
D-A9□(V)	20	31.5	56.5	81.5	—	—	5.5
	25	31.5	56.5	81.5	—	—	5.5
	32	32.5	57.5	82.5	107.5	—	6.5
	40	38.5	63.5	88.5	113.5	138.5	11.5
D-M9□(V) D-M9□W(V) D-M9□A(V)	20	35.5	60.5	85.5	—	—	9.5
	25	35.5	60.5	85.5	—	—	9.5
	32	36.5	61.5	86.5	111.5	—	10.5
	40	42.5	67.5	92.5	117.5	142.5	15.5
D-B5□ D-B64	20	26	51	76	—	—	0
	25	26	51	76	—	—	0
	32	27	52	77	102	—	1
D-C7□ D-C80 D-C73C D-C80C	40	32	57	82	107	132	6
	20	32	57	82	—	—	6
	25	32	57	82	—	—	6
D-B59W	32	33	58	83	108	—	7
	40	38	63	88	113	138	12
	20	29	54	79	—	—	3
	25	29	54	79	—	—	3
D-H7□ D-H7C D-H7□W D-H7NF	32	30	55	80	105	—	4
	40	35	60	85	110	135	9
	20	31	56	81	—	—	5
	25	31	56	81	—	—	5
D-G5NT	32	32	57	82	107	—	6
	40	37	62	87	112	137	11
	20	27.5	52.5	77.5	—	—	1.5
	25	27.5	52.5	77.5	—	—	1.5
	32	28.5	53.5	78.5	103.5	—	2.5
	40	33.5	58.5	83.5	108.5	133.5	7.5

- CVQ
- CVMQ
- CVJ□
- CVM□
- CVS3
- CVS1
- MVGQ

**Auto Switch Proper Mounting Position: Standard, Spring Extend (T)  
Non-Rotating, Spring Extend (T)** (mm)

Auto switch model	Bore size	A	B dimension				
			to 15 <sup>st</sup>	51 to 100 <sup>st</sup>	101 to 150 <sup>st</sup>	151 to 200 <sup>st</sup>	201 to 250 <sup>st</sup>
D-A9□(V)	20	6.5	30.5	55.5	80.5	—	—
	25	6.5	30.5	55.5	80.5	—	—
	32	7.5	31.5	56.5	81.5	106.5	—
	40	13.5	36.5	61.5	86.5	111.5	136.5
D-M9□(V) D-M9□W(V) D-M9□A(V)	20	10.5	34.5	59.5	84.5	—	—
	25	10.5	34.5	59.5	84.5	—	—
	32	11.5	35.5	60.5	85.5	110.5	—
	40	17.5	40.5	65.5	90.5	115.5	140.5
D-B5□ D-B64	20	1	25	50	75	—	—
	25	1	25	50	75	—	—
	32	2	26	51	76	101	—
	40	7	31	56	81	106	131
D-C7□ D-C80 D-C73C D-C80C	20	7	31	56	81	—	—
	25	7	31	56	81	—	—
	32	8	32	57	82	107	—
	40	13	37	62	87	112	137
D-B59W	20	4	28	53	78	—	—
	25	4	28	53	78	—	—
	32	5	29	54	79	104	—
	40	10	34	59	84	109	134
D-H7□ D-H7C D-H7□W D-H7NF	20	6	30	55	80	—	—
	25	6	30	55	80	—	—
	32	7	31	56	81	106	—
	40	12	36	61	86	111	136
D-G5NT	20	2.5	26.5	51.5	76.5	—	—
	25	2.5	26.5	51.5	76.5	—	—
	32	3.5	27.5	52.5	77.5	102.5	—
	40	8.5	32.5	57.5	81.5	107.5	132.5

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

- D-□
- X□



# Auto Switch Mounting 2

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height

### Auto Switch Mounting Height

(mm)

Auto switch model Bore size (mm)	D-A9□(V) D-M9□(V) D-M9□W(V) D-M9□A(V)	D-B5□ D-B64 D-B59W D-G5NT D-H7C	D-C7□ D-C80 D-H7□ D-H7□W D-H7NF	D-C73C D-C80C
	Hs	Hs	Hs	Hs
20	23	25.5	22.5	25
25	25.5	28	25	27.5
32	29	31.5	28.5	31
40	33	35.5	32.5	35



### Minimum Auto Switch Mounting Stroke

n: No. of auto switches (mm)

Auto switch model	No. of auto switch mounted				
	1	2		n	
		Different surfaces	Same surface	Different surfaces	Same surface
D-A9□ D-M9□ D-M9□W	10	15 <small>Note 1</small>	45 <small>Note 1</small>	$15 + 45 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 2</small>	$45 + 45 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-M9□V	5	20	35	$20 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 2</small>	$35 + 35 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-A9□V	5	15	25	$15 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 2</small>	$25 + 35 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-M9□WV D-M9□AV	10	20	35	$20 + 35 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 2</small>	$35 + 35 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-C7□ D-C80	10	15	50	$15 + 45 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 2</small>	$50 + 45 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-H7□ D-H7□W D-H7NF	10	15	60	$15 + 45 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 2</small>	$60 + 45 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-C73C D-C80C D-H7C	10	15	65	$15 + 50 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 2</small>	$65 + 50 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-B5□/B64 D-G5NT	10	15	75	$15 + 50 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 2</small>	$75 + 55 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>
D-B59W	15	20	75	$20 + 50 \frac{(n-2)}{2}$ <small>(n = 2, 4, 6...)</small> <small>Note 2</small>	$75 + 55 (n-2)$ <small>(n = 2, 3, 4, 5...)</small>

Note 2) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.

Note 1) Auto switch mounting (The adjustment as shown in the figures below is required with the following stroke ranges.)

Auto switch model	With 2 auto switches	
	Different surfaces <small>Note 1</small>	Same surface <small>Note 1</small>
	 <p>The proper auto switch mounting position is 6 mm inward from the switch holder edge.</p>	 <p>The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with each other.</p>
D-A93	—	45 to less than 50 stroke
D-M9□ D-M9□W	15 to less than 20 stroke	45 to less than 55 stroke

### Operating Range

Auto switch model	Bore size (mm)			
	20	25	32	40
D-A9□(V)	6	6	6	6
D-M9□(V)/M9□W(V) D-M9□A(V)	3.5	3	3.5	3
D-C7□/C80 D-C73C/C80C	7	8	8	8
D-B5□/B64	8	8	9	9
D-B59W	12	12	13	13
D-H7□/H7□W D-G5NT/H7NF	4	4	4.5	5
D-H7C	7	8.5	9	10

\* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approximately ±30% dispersion).  
It may vary substantially depending on an ambient environment.


### [Mounting screw set made of stainless steel]

The following set of mounting screws made of stainless steel is available. Use it in accordance with the operating environment. (Please order the auto switch mounting bracket separately, since it is not included.)  
BBA4: For D-C7/C8/H7 types  
Note 4) Refer to page 1048 for the details of BBA4.

### Auto Switch Mounting Bracket: Part No.

Auto switch mounting	Bore size (mm)			
	ø20	ø25	ø32	ø40
D-M9□(V) D-M9□W(V) D-A9□(V)	BM5-020 Note 1)	BM5-025 Note 1)	BM5-032 Note 1)	BM5-040 Note 1)
D-M9□A(V)	BM5-020S Note 2)	BM5-025S Note 2)	BM5-032S Note 2)	BM5-040S Note 2)
D-H7□ D-H7□W D-C7□/C80 D-C73C/C80C	BM2-020A	BM2-025A	BM2-032A	BM2-040A
D-B5□/B64 D-B59W D-G5NT	BA2-020	BA2-025	BA2-032	BA2-040

Note 1) Set part number which includes the auto switch mounting band (BM2-□□□A) and the holder kit (BJ5-1/Switch bracket: Transparent).  
Since the switch bracket (made from nylon) are affected in an environment where alcohol, chloroform, methylamines, hydrochloric acid or sulfuric acid is splashed over, so it cannot be used. Please consult SMC regarding other chemicals.  
Note 2) Set part number which includes the auto switch mounting band (BM2-□□□AS/tainless steel screw) and the holder kit (BJ4-1/Switch bracket: White).  
Note 3) For the D-M9□A (V) type auto switch, do not install the switch bracket on the indicator light.

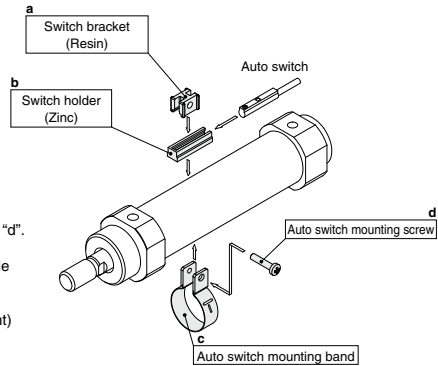

- (1) BJ□-1 is a set of "a" and "b".
- (2) BM2-□□□A (S) is a set of "c" and "d".  
Band (c) is mounted so that the projected part is on the internal side (contact side with the tube).  
BJ4-1 (Switch bracket: White)  
BJ5-1 (Switch bracket: Transparent)

- CVQ
- CVQM
- CVJ□
- CVM□
- CV3
- CVS1
- MVGQ

Besides the models listed in How to Order, the following auto switches are applicable. Refer to pages 941 to 1067 for detailed specifications.

Auto switch type	Part no.	Electrical entry (Fetching direction)	Features
<b>Reed</b>	D-B53, C73, C76	Grommet (In-let)	—
	D-C80		Without indicator light
<b>Solid state</b>	D-H7A1, H7A2, H7B		—
	D-H7NW, H7PW, H7BW		Diagnostic indication (2-color)
	D-G5NT		With timer

\* For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1014 and 1015 for details.  
\* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H types) are also available. Refer to page 959 for details.

- D-□
- X□


# Valve Mounted Cylinder Double Acting CV3 Series

Lube/Non-lube Type:  $\varnothing 40, \varnothing 50, \varnothing 63, \varnothing 80, \varnothing 100$

## How to Order

### Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDV3LN50-100-1

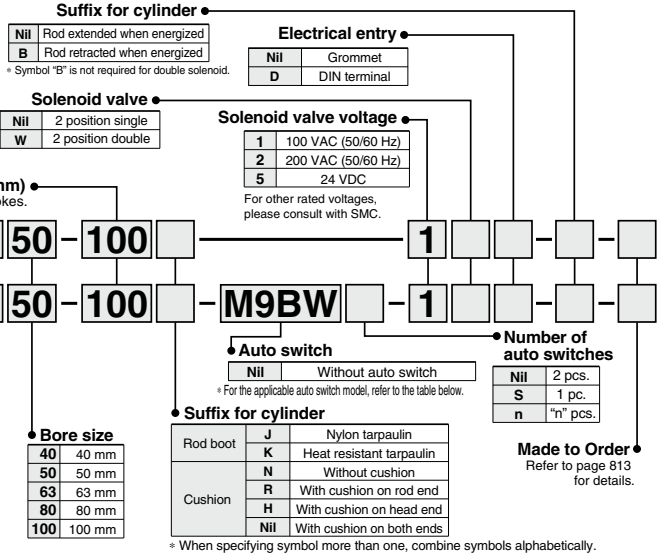

### Applicable Auto Switches/Refer to pages 941 to 1067 for further information on auto switches.

Type	Special function	Electrical entry	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load
				DC	AC	Tie-rod mounting	Band mounting	0.5 (Nil)	1 (M)	3 (L)	5 (Z)			
Solid state auto switch		Grommet	3-wire (NPN)	24 V	5 V, 12 V	M9N	G59***	●	●	●	○	○	IC circuit	Relay, PLC
			3-wire (PNP)					●	●	●	○	○		
		Terminal conduit	2-wire	12 V	M9B	K59***	●	●	●	○	○			
			3-wire (NPN)				●	●	●	○	○			
	Diagnostic indication (2-color indicator)	Grommet	2-wire	24 V	5 V, 12 V	G39C K39C M9NW	G39 K39	●	●	●	○	○		
			3-wire (NPN)					●	●	●	○	○		
		Water resistant (2-color indicator)	Grommet	3-wire (PNP)	24 V	5 V, 12 V	M9PW	G59W***	●	●	●	○	○	
				2-wire					●	●	●	○	○	
				3-wire (NPN)					●	●	●	○	○	
				3-wire (PNP)					●	●	●	○	○	
With diagnostic output (2-color indicator)	Grommet	2-wire	24 V	5 V, 12 V	M9BW	K59W***	●	●	●	○	○			
		4-wire (NPN)					●	●	●	○	○			
Reed auto switch		Grommet	2-wire	24 V	12 V	A96 [Z76]*** A83 [Z73]*** A90 [Z80]***	A54 A64	●	●	●	●	○	IC circuit	Relay, PLC
								100 V or less	●	●	●	●		
		Terminal conduit	Grommet	2-wire	24 V	12 V	A33C A34C A44C	A33 A34 A44	●	●	●	○	○	
									100 V, 200 V	●	●	●	○	
	Diagnostic indication (2-color indicator)	Grommet	2-wire	24 V	12 V	A59W B59W***	A59 B59	●	●	●	○	○		
								100 V, 200 V	●	●	●	○	○	

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

\* For details about auto switches with pre-wired connector, refer to pages 1014 and 1015.

\*2 1 m type lead wire is only applicable to D-A93.

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
1 m ..... M (Example) M9NWW  
3 m ..... L (Example) M9NWL  
5 m ..... Z (Example) M9NWZ

\* Solid state auto switches marked with "○" are produced upon receipt of order.

\*\* D-G5C/W/K59W/G59F cannot be mounted on  $\varnothing 40$  and  $\varnothing 50$  lube type cylinder.

\*\*\* D-B5□/B64/G5K5□ types are mountable only upon a receipt of order. (Not mountable after the time of shipment)

\*\*\*\* D-A9□ cannot be mounted on  $\varnothing 50$ . Select auto switches in brackets.


\* Since there are other applicable auto switches than listed, refer to page 831 for details.

\* D-A9□/M9□/M9□/M9□/□ auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled before shipped.)

- **Operation type can be changed to rod extended when energized or rod retracted when energized.**
- **Ease of maintenance and inspection.**  
The solenoid valve can be separated easily and the cylinder can also be disassembled.
- **A manual operation mechanism is provided as standard equipment (non-locking).**



**Symbol**  
Air cushion



**Made to Order Specifications**  
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC4	With heavy duty scraper
-XC6	Made of stainless steel
-XC7	Tie-rod, cushion valve, and tie-rod nut and similar parts made of stainless steel
-XC15	Change of tie-rod length
-XC22	Fluororubber seals
-XC29	Double knuckle joint with spring pin
-XC65	-XC6 + -XC7

## ⚠ Precautions

**Minimum stroke for auto switch mounting**

### ⚠ Caution

1. Each switch and mounting type of cylinder has different minimum mountable stroke. Be careful especially of the center trunnion type. (For details, refer to pages 828 and 829.)

Refer to pages 826 to 831 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Auto switch mounting bracket: Part no.

## Specifications

Applicable bore size (mm)	40	50	63	80	100
Lubrication	Lube/Non-lube				
Action	Double acting				
Fluid	Air				
Proof pressure	1.35 MPa				
Maximum operating pressure	0.9 MPa				
Minimum operating pressure	0.15 MPa				
Ambient and fluid temperature	-10 to 50°C (No freezing)				
Cushion	Air cushion				
Stroke length tolerance	Up to 250 <sup>st: +1.0</sup> , 251 to 1000 <sup>st: +1.4</sup>				
Port size	Rc 1/4				
Piston speed	50 to 500 mm/s*				50 to 350 mm/s*
Mouting	Basic type, Axial foot type, Rod side flange type Single clevis type, Double clevis type, Center trunnion type				
Allowable kinetic energy	2.4 J	4.4 J	7.8 J	11.7 J	20.5 J

\* Operate within the range of absorbed energy.

## Solenoid Valve Specifications

Applicable solenoid valve model	V3□08			
Coil rated voltage	100/200 VAC (50/60 Hz), 24 VDC			
Effective area of valve (Cv factor)	18 mm <sup>2</sup> (1.00)			
Electrical entry	Grommet, DIN terminal			
Allowable voltage	-15 to 10% of the rated voltage			
Coil insulation	Class B or equivalent (130°C)			
Apparent power <sup>Note)</sup>	AC	Inrush	50 Hz	8.5 VA
			60 Hz	7.5 VA
		Holding	50 Hz	7.0 VA
			60 Hz	5.5 VA
Power consumption <sup>Note)</sup>	DC	6 W		

Note) At the rated voltage.

## Standard Stroke

Bore size (mm)	Standard stroke (mm)
40	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500
50, 63	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500, 600
80, 100	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500, 600, 700

Note) The cylinders with the standard strokes indicated above can be delivered in a short term. Intermediate stroke except mentioned above is manufactured upon receipt of order. When the auto switch is attached, the minimum stroke is going to be different. Refer to pages 828 and 829. The minimum stroke length is different in the trunnion type. For further information, refer to pages 828 and 829.

## Rod Boot Material

Symbol	Rod boot material	Maximum ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C*

\* Maximum ambient temperature for the rod boot itself.

## Accessory

	Mouting	Basic type	Foot type	Rod side flange type	Single clevis type	Double <sup>†</sup> clevis type	Center trunnion type
Standard equipment	Rod end nut	●	●	●	●	●	●
	Clevis pin	—	—	—	—	●	—
Option	Single knuckle joint	●	●	●	●	●	●
	Double knuckle joint* (with pin)	●	●	●	●	●	●
	With rod boot	●	●	●	●	●	●

\* Pin, plain washer and cotter pin are packaged together with double clevis and double knuckle joint.

† Refer to page 821 for dimensions and part numbers of the option.

Refer to page 818 for dimensions of the rod boot.

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

-X□

# CV3 Series

## Weight

(kg)


Bore size (mm)		40	50	63	80	100
Basic weight	Basic type	1.30 (1.35)	1.73 (1.77)	2.57 (2.61)	4.29 (4.44)	6.01 (6.21)
	Axial foot type	1.47 (1.52)	1.93 (1.97)	2.86 (2.9)	5.08 (5.23)	6.94 (7.14)
	Rod side flange type	1.56 (1.61)	2.14 (2.18)	3.19 (3.23)	5.39 (5.54)	7.40 (7.6)
	Single clevis type	—	2.46 (2.5)	3.68 (3.72)	6.23 (6.38)	8.66 (8.86)
	Double clevis type	—	2.51 (2.55)	3.73 (3.77)	6.29 (6.44)	8.73 (8.93)
	Trunnion type	1.95 (2.05)	2.52 (3.52)	3.96 (4.16)	6.67 (6.96)	9.58 (9.97)
Additional weight per each 50 mm of stroke	All mounting brackets (Except trunnion type of iron tube)	0.22 (0.28)	0.28 (0.35)	0.37 (0.43)	0.52 (0.70)	0.65 (0.87)
	Trunnion type of steel	(0.36)	(0.46)	(0.65)	(0.86)	(1.07)
Accessory bracket	Single knuckle	0.23	0.26	0.26	0.60	0.83
	Double knuckle (with pin)	0.37	0.43	0.43	0.87	1.27

Calculation: (Example) CV3L40-100-1

\*( ) : Steel tube type.

- Basic weight:.....1.47 (kg)
- Additional weight:.....0.22 (kg/50 st)
- Cylinder stroke:.....100 (st)  $1.47 + 0.22 \times 100 + 50 = 1.9$  kg

## Opening Range of Throttle Valve and Driving Speed



Conditions: Operating pressure 0.5 MPa, Horizontal mounting, No load, Spring return side

- Driving speeds indicated above are for reference.

## Mounting Bracket Part No.

### Mounting Bracket Part No.

Bore size (mm)	40	50	63	80	100
Axial foot *	CA1-L04	CA1-L05	CA1-L06	CA1-L08	CA1-L10
Flange	CA1-F04	CA1-F05	CA1-F06	CA1-F08	CA1-F10
Single clevis	—	CV3-C05	CV3-C06	CV3-C08	CV3-C10
Double clevis **	—	CV3-D05	CV3-D06	CV3-D08	CV3-D10

\* Order two foot brackets per cylinder.

\*\* Accessories for each mounting bracket are as follows.

Foot, Flange: Body mounting bolts, Spring washer

Single clevis: Body mounting bolts, Nut, Spring washer

Double clevis: Body mounting bolts, Nut, Spring washer, Clevis pin, Flat washer, Cotter pin



# CV3 Series

## Specific Product Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, pages 3 to 12 for Actuator and Auto Switch Precautions, and 3/4/5 Port Solenoid Valve Precautions in Best Pneumatics No. 1-1.


### Precautions

#### Warning

1. Do not loosen the cushion valve more than 2 turns from the fully closed state.  
Do not loosen it more than 2 turns because this could cause the cushion valve to be ejected.

#### Caution

1. Do not use an air cylinder as an air-hydro cylinder, because this could result in oil leakage.
2. Do not turn the piston rod with the rod boot kept locked.  
When turning the piston rod, loosen the band once and do not twist the rod boot.
3. Set the breathing hole in the rod boot downward or in the direction that prevents entry of dust or water content.



4. Use a socket wrench when replacing mounting brackets.  
The use of other tools could cause parts such as nuts to become deformed or affect their ease of service. For the sockets to be used, refer to the table below.

Bore size (mm)	Nut	Width across flats	Socket
40, 50	DA00180 (M8 x 1.25, Hexagon nut 3 types)	13	JIS B 4636 + 2 point angle socket 13
63	DA00009 (M10 x 1.25, Hexagon nut 3 types)	17	JIS B 4636 + 2 point angle socket 17
80, 100	DA00013 (M12 x 1.75, Hexagon nut 3 types)	19	JIS B 4636 + 2 point angle socket 19

5. Do not replace the bushings or the cushion seals.  
The bushings and the cushion seals are press-fitted. To replace them, they must be replaced together as a cover assembly.
6. To replace a seal, apply grease to the new seal before installing it.  
If the cylinder is put into operation without applying grease to the seal, it could cause the seal to wear significantly, leading to premature air leakage.
7. Do not disassemble a trunnion type cylinder.  
It is extremely difficult to align the axial center of the trunnion with the axial center of the cylinder. Thus, if this type of cylinder is disassembled and reassembled, there is the likelihood that the required dimensional accuracy cannot be attained, which could lead to a malfunction.
8. Operate the cylinder at a drive speed within the range of 50 and 500 mm/s.  
(Operate within the range of absorbed energy. Refer to the front matters (Air cylinder model selection) of Best Pneumatics No. 2-1.)

### Selection

#### Warning

1. Confirm the specifications.  
Products in this catalog are designed to be used for compressed air systems. If not operated within the designated pressure or temperature, it may damage the products or cause malfunction. (Refer to specifications.)
2. Energizing continuously for a long period of time  
When the valve is continuously energized for a long period of time, the performance may deteriorate or effect peripheral equipment adversely since temperature rises when coils generate heat.

CVQ

CVQM

CVJ

CVM

CV3

CVS1

MVGQ


D-

-X

# CV3 Series

## Piston Speed Adjustment


1. To slow down the piston speed, screw in the needle of the silencer exhaust throttle valve clockwise, to reduce the amount of air that is discharged.
2. The throttle valve needle opens fully when it is loosened 11 turns from its fully closed position.



3. After the specified speed has been set, secure the needle with the lock nut.


## Manual Operation

Manual operation (non-locking) is possible by pushing the manual button about 3 mm.




## Solenoid Valve Replacement and Order No.

### <Single solenoid>

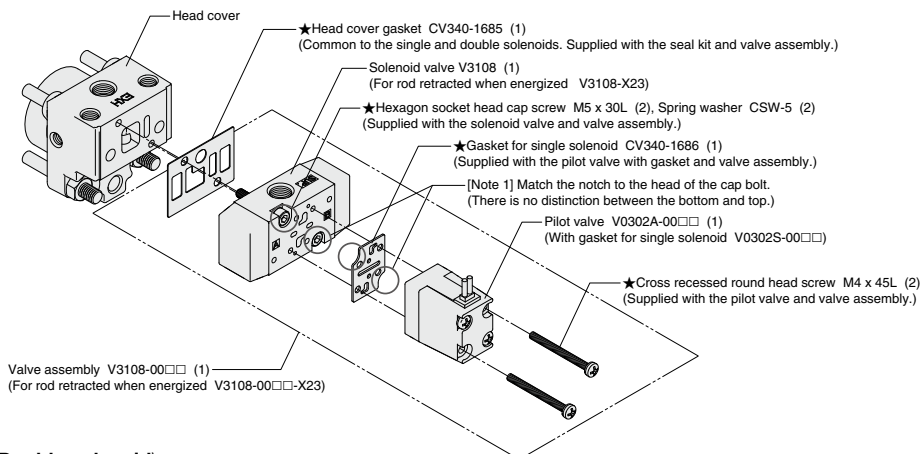


### <Double solenoid>

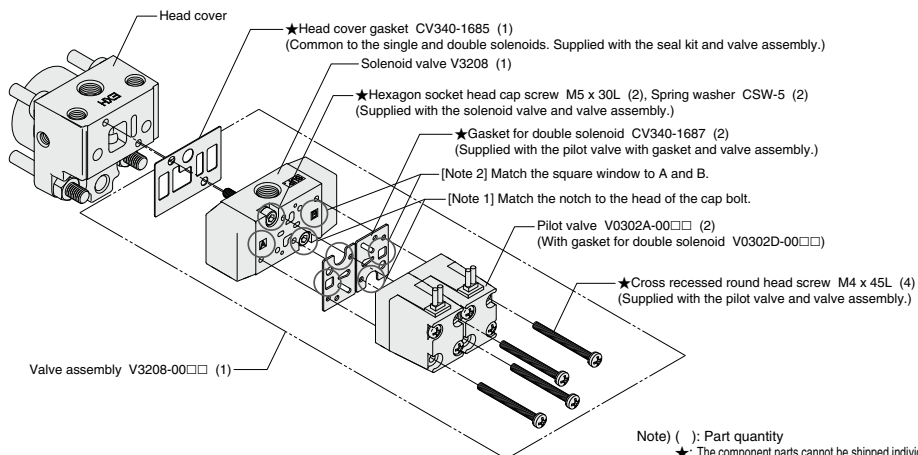

Note) ( ): Part quantity

★: The component parts cannot be shipped individually.

**Construction**

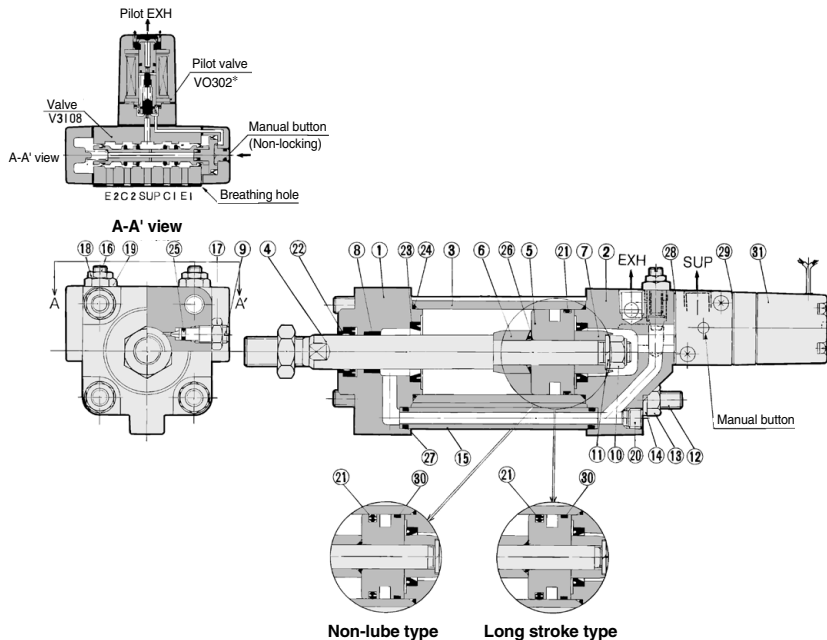

- CVQ
- CVQM
- CVJ
- CVM
- CV3
- CVS1
- MVGQ

**Component Parts**

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Matt black painted
2	Head cover	Aluminum alloy	Matt black painted
3	Cylinder tube	Aluminum alloy	Hard anodized
4	Piston rod	Carbon steel	Hard chrome plated
5	Piston	Aluminum alloy	Chromated
6	Cushion ring A	Rolled steel	Zinc chromated
7	Cushion ring B	Rolled steel	Zinc chromated
8 <sup>†</sup>	Bushing	Lead-bronze casted	
9	Cushion valve	Rolled steel	Electroless nickel plated
10	Piston nut	Rolled steel	Zinc chromated
11	Spring washer	Steel wire	Zinc chromated
12	Tie-rod	Carbon steel	Zinc chromated
13	Tie-rod nut	Carbon steel	Black zinc chromated
14	Spring washer	Steel wire	Black zinc chromated
15	Pipe	Carbon steel tube	Chromated
16	Needle	Sulfur easy chipping steel	Electroless nickel plated
17	Lock nut	Carbon steel	Nickel plated
18	Lock nut	Carbon steel	Nickel plated
19	Needle guide	Sulfur easy chipping steel	Electroless nickel plated
20	Plug	Chromium molybdenum steel	Black zinc chromated
30	Wear ring	Resin	

No.	Description	No. of solenoids	Rod extended when energized	Rod retracted when energized
31	Solenoid valve	Single	(1)	(2)
		Double	(3)	

<sup>†</sup> How to order solenoid valves  
 Note 1) V3108-00 [Voltage] [Electrical entry]  
 Note 2) V3108-00 [Voltage] [Electrical entry]-x 23  
 Note 3) V3208-00 [Voltage] [Electrical entry]

**Component Parts**

No.	Description	Material	Note
21	Piston seal	NBR	
22	Rod seal	NBR	
23*	Cushion seal	NBR	
24	Cylinder tube gasket	NBR	
25	Cushion valve seal	NBR	
26*	Piston gasket	NBR	
27	Pipe gasket	NBR	
28	Head cover gasket	NBR	
29	Single solenoid gasket	NBR	
	Double solenoid gasket	NBR	

\* Not replaceable.

**Replacement Parts: Seal Kit**

Lube Type			Non-lube Type		
Bore size (mm)	Kit no.	Contents	Bore size (mm)	Kit no.	Contents
40	CV3-40-PS	Set of nos. above 21, 22, 24, 25, 27, 28	40	CV3N40-PS	Set of nos. above 21, 22, 24, 25, 27, 28
50	CV3-50-PS		50	CV3N50-PS	
63	CV3-63-PS		63	CV3N63-PS	
80	CV3-80-PS		80	CV3N80-PS	
100	CV3-100-PS		100	CV3N100-PS	

\* Seal kit includes 21, 22, 24, 25, 27, 28. Order the seal kit, based on each bore size. (The parts indicated with numbers 23 and 26 are not replaceable.)

\* Seal kit includes a grease pack (ø40, ø50: 10 g, ø63, ø80: 20 g, ø100: 30 g). Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

For the dimensions of DIN terminal, refer to page 821.


- D
- X



# CV3 Series

## Basic Type: CV3B□

Lube type (CV3B), Non-lube type (CV3BN)

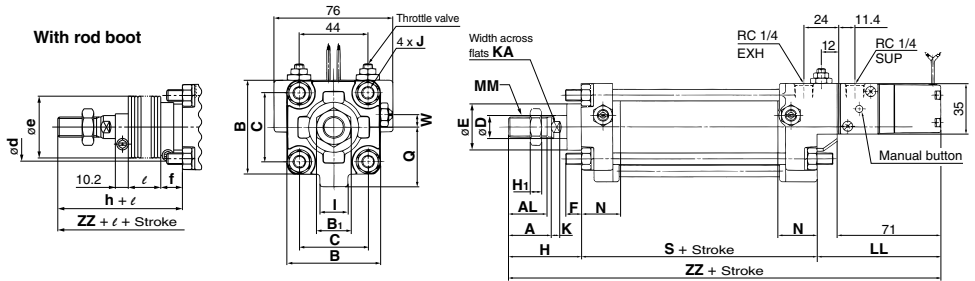


Bore size (mm)	Stroke range* (mm)	A	AL	B	B <sub>1</sub>	C	D	E	F	H <sub>1</sub>	I	J	K	KA	LL	MM	N	Q	S
40	Up to 500	30	27	60	22	44	16	32	10	8	18	M8 x 1.25	6	14	86	M14 x 1.5	27	38	84
50	Up to 600	35	32	70	27	52	20	40	10	11	18	M8 x 1.25	7	18	83	M18 x 1.5	30	43.5	90
63	Up to 600	35	32	85	27	64	20	40	10	11	18	M10 x 1.25	7	18	83	M18 x 1.5	31	49	98
80	Up to 750	40	37	102	32	78	25	52	14	13	20	M12 x 1.75	10	22	84	M22 x 1.5	37	63	116
100	Up to 750	40	37	116	41	92	30	52	14	16	20	M12 x 1.75	10	26	85	M26 x 1.5	40	73	126

Bore size (mm)	W	Without rod boot		With rod boot					
		H	ZZ	d	e	f	h	ℓ	ZZ
40	8	51	221	56	43	11.2	59	1/4 stroke	229
50	0	58	231	64	52	11.2	66	1/4 stroke	239
63	0	58	239	64	52	11.2	66	1/4 stroke	247
80	0	71	271	76	65	12.5	80	1/4 stroke	280
100	0	72	283	76	65	14.0	81	1/4 stroke	292

\* The minimum stroke of the one with rod boot is 20 mm or more.

## Axial Foot Type: CV3L□

Lube type (CV3L), Non-lube type (CV3LN)

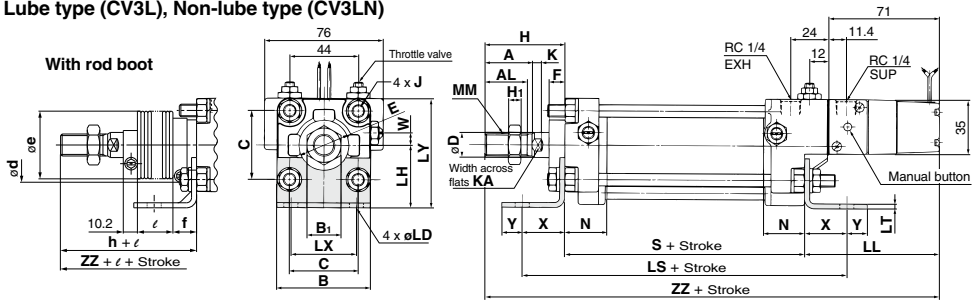


Bore size (mm)	Stroke range* (mm)	A	AL	B	B <sub>1</sub>	C	D	E	F	H <sub>1</sub>	J	K	KA	LD	LH	LL	LS	LT	LX	LY
40	Up to 500+ 501 to 600+	30	27	60	22	44	16	32	10	8	M8 x 1.25	6	14	9	40	86	138	3.2	42	70
50	Up to 600+ 601 to 1000+	35	32	70	27	52	20	40	10	11	M8 x 1.25	7	18	9	45	83	144	3.2	50	80
63	Up to 600+ 611 to 1000+	35	32	85	27	64	20	40	10	11	M10 x 1.25	7	18	11.5	50	83	166	3.2	59	93
80	Up to 750+ 751 to 1000+	40	37	102	32	78	25	52	14	13	M12 x 1.75	10	22	13.5	65	84	204	4.5	76	116
100	Up to 750+ 751 to 1000+	40	37	116	41	92	30	52	14	16	M12 x 1.75	10	26	13.5	75	85	212	6	92	133

Bore size (mm)	MM	N	S	W	X	Y	Without rod boot		With rod boot					
							H	ZZ	d	e	f	h	ℓ	ZZ
40	M14 x 1.5	27	84	8	27	13	51	221	56	43	11.2	59	1/4 stroke	229
50	M18 x 1.5	30	90	0	27	13	58	231	64	52	11.2	66	1/4 stroke	239
63	M18 x 1.5	31	98	0	34	16	58	239	64	52	11.2	66	1/4 stroke	247
80	M22 x 1.5	37	116	0	44	16	71	271	76	65	12.5	80	1/4 stroke	280
100	M26 x 1.5	40	126	0	43	17	72	283	76	65	14.0	81	1/4 stroke	292

The minimum stroke of the one with rod boot is 20 mm or more. \* Long stroke

**Rod Side Flange Type: CV3F□**

Lube type (CV3F), Non-lube type (CV3FN)

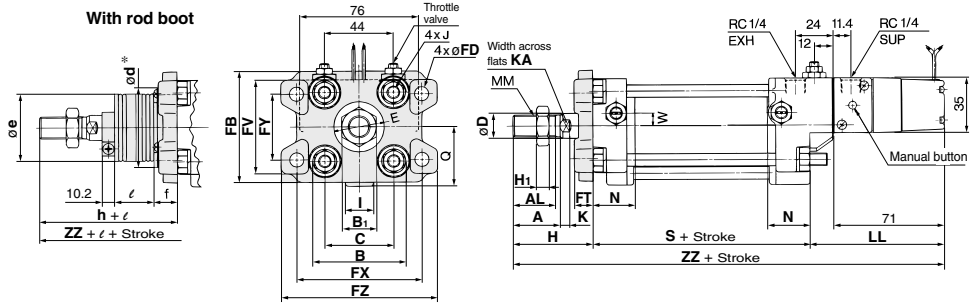

Bore size (mm)	Stroke range* (mm)	A	AL	FB	B	B <sub>1</sub>	C	D	E	FD	FT	FV	FX	FY	FZ	H <sub>1</sub>	I	J	K	KA
40	Up to 600 601 to 800**	30	27	71	60	22	44	16	32	9	12	60	80	42	100	8	18	M8 x 1.25	6	14
50	Up to 600 601 to 1000**	35	32	81	70	27	52	20	40	9	12	70	90	50	110	11	18	M8 x 1.25	7	18
63	Up to 600 611 to 1000**	35	32	101	85	27	64	20	40	11.5	15	86	105	59	130	11	18	M10 x 1.25	7	18
80	Up to 750 761 to 1000**	40	37	119	102	32	78	25	52	13.5	18	102	130	76	160	13	20	M12 x 1.75	10	22
100	Up to 750 761 to 1000**	40	37	133	116	41	92	30	52	13.5	18	116	150	92	180	16	20	M12 x 1.75	10	26


Bore size (mm)	LL	MM	N	Q	S	W	Without rod boot		With rod boot						
							H	ZZ	d*	e	f	h	ℓ	ZZ	
40	86	M14 x 1.5	27	38	84	8	51	221	52	43	15	59		1/4 stroke	229
50	83	M18 x 1.5	30	43.5	90	0	58	231	58	52	15	66		1/4 stroke	239
63	83	M18 x 1.5	31	49	98	0	58	239	58	52	17.5	66		1/4 stroke	247
80	84	M22 x 1.5	37	63	116	0	71	271	80	65	21.5	80		1/4 stroke	280
100	85	M26 x 1.5	40	73	126	0	72	283	80	65	21.5	81		1/4 stroke	292

\* The minimum stroke of the one with rod boot is 20 mm or more. \* When drilling holes to get through the rod boot for the purpose of mounting, make the holes larger than the outer diameter (ød) of the rod boot mounting bracket.  
\*\* Long stroke

**Single Clevis Type: CV3C□**

Lube type (CV3C), Non-lube type (CV3CN)

Bore size ø40 is not available.

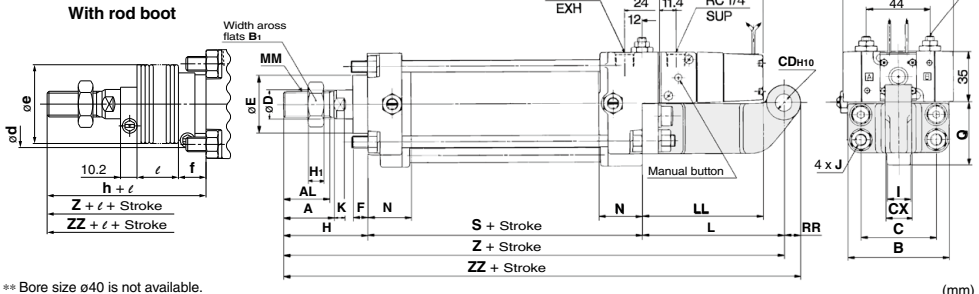

\*\* Bore size ø40 is not available.

Bore size (mm)	Stroke range** (mm)	A	AL	B	B <sub>1</sub>	C	CDH <sub>10</sub>	CX	D	E	F	H <sub>1</sub>	I	J	K	KA	L	LL
50	Up to 600	35	32	70	27	52	12 <sup>+0.070</sup> <sub>0</sub>	18 <sup>-0.1</sup> <sub>0</sub>	20	40	10	11	18	M8 x 1.25	7	18	98	83
63	Up to 600	35	32	85	27	64	16 <sup>+0.070</sup> <sub>0</sub>	25 <sup>-0.3</sup> <sub>0</sub>	20	40	10	11	18	M10 x 1.25	7	18	100	83
80	Up to 750	40	37	102	32	78	20 <sup>+0.084</sup> <sub>0</sub>	31.5 <sup>-0.1</sup> <sub>-0.3</sub>	25	52	14	13	20	M12 x 1.75	10	22	105	84
100	Up to 750	40	37	116	41	92	25 <sup>+0.084</sup> <sub>0</sub>	35.5 <sup>-0.3</sup> <sub>-0.3</sub>	30	52	14	16	20	M12 x 1.75	10	26	110	85

Bore size** (mm)	MM	N	Q	RR	S	Without rod boot		With rod boot								
						H	ZZ	d	e	f	h	ℓ	Z	ZZ		
50	M18 x 1.5	30	43.5	12	90	58	246	258	64	52	11.2	66		1/4 stroke	254	266
63	M18 x 1.5	31	49	16	98	58	256	272	64	52	11.2	66		1/4 stroke	264	280
80	M22 x 1.5	37	63	20	116	71	292	312	76	65	12.5	80		1/4 stroke	301	321
100	M26 x 1.5	40	73	25	126	72	308	333	76	65	14.0	81		1/4 stroke	317	342

\* The minimum stroke of the one with rod boot is 20 mm or more.

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ


D-□

-X□

# CV3 Series

## Double Clevis Type: CV3D□

Lube type (CV3D), Non-lube type (CV3DN)  
Bore size  $\phi 40$  is not available.

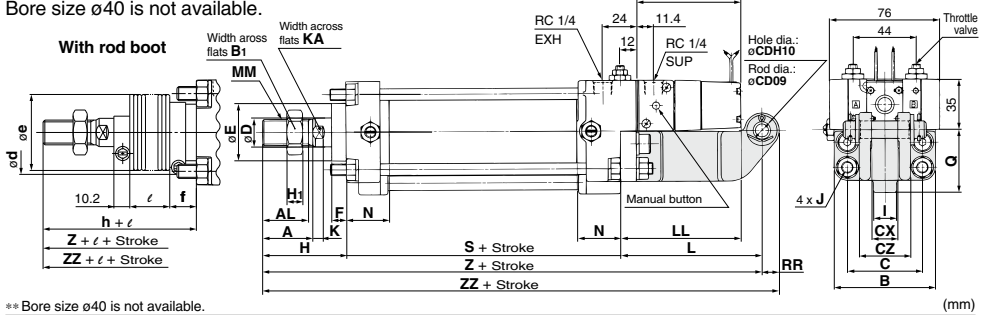

\*\* Bore size  $\phi 40$  is not available.


Bore size ** (mm)	Stroke range * (mm)	A	AL	B	B <sub>1</sub>	C	CD	CX	CZ	D	E	F	H <sub>1</sub>	I	J	K	KA	L
50	Up to 600	35	32	70	27	52	12	18 <sup>+0.3 -0.1</sup>	35.5	20	40	10	11	18	M8 x 1.25	7	18	98
63	Up to 600	35	32	85	27	64	16	25 <sup>+0.3 -0.1</sup>	50	20	40	10	11	18	M10 x 1.25	7	18	100
80	Up to 750	40	37	102	32	78	20	31.5 <sup>+0.3 -0.1</sup>	63	25	52	14	13	20	M12 x 1.75	10	22	105
100	Up to 750	40	37	116	41	92	25	35.5 <sup>+0.3 -0.1</sup>	71	30	52	14	16	20	M12 x 1.75	10	26	110

Bore size ** (mm)	LL	MM	N	Q	RR	S	Without rod boot			With rod boot						
							H	Z	ZZ	d	e	f	h	ℓ	Z	ZZ
50	83	M18 x 1.5	30	43.5	12	90	58	246	258	64	52	11.2	66	1/4 stroke	254	266
63	83	M18 x 1.5	31	49	16	98	58	256	272	64	52	11.2	66	1/4 stroke	264	280
80	84	M22 x 1.5	37	63	20	116	71	292	312	76	65	12.5	80	1/4 stroke	301	321
100	85	M26 x 1.5	40	73	25	126	72	308	333	76	65	14.0	81	1/4 stroke	317	342

\* Clevis pin, flat washer and cotter pin are shipped together. The minimum stroke with rod boot is 20 mm or more.

## Center Trunnion Type: CV3T□

Lube type (CV3T), Non-lube type (CV3TN)



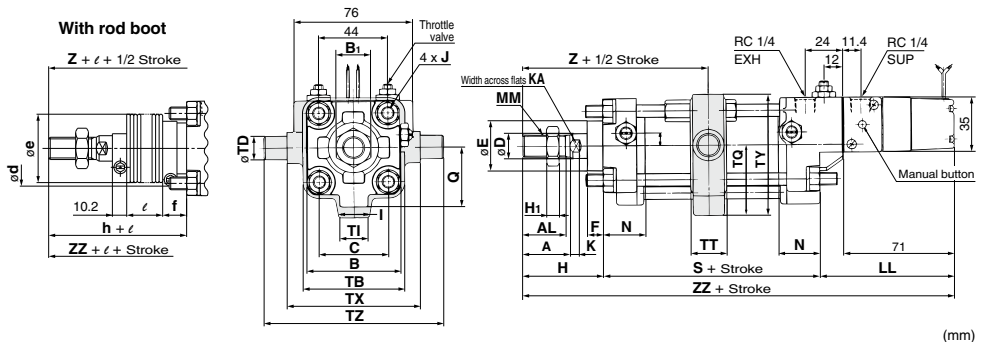


Bore size (mm)	Stroke range * (mm)	A	AL	B	B <sub>1</sub>	C	D	E	F	H <sub>1</sub>	J	K	KA	LL	MM	N	S	TB
40	25 to 500	30	27	60	22	44	16	32	10	8	M8 x 1.25	6	14	86	M14 x 1.5	27	84	65
50	25 to 600	35	32	70	27	52	20	40	10	11	M8 x 1.25	7	18	83	M18 x 1.5	30	90	75
63	50 to 600	35	32	85	27	64	20	40	10	11	M10 x 1.25	7	18	83	M18 x 1.5	31	98	90
80	50 to 750	40	37	102	32	78	25	52	14	13	M12 x 1.75	10	22	84	M22 x 1.5	37	116	110
100	50 to 750	40	37	116	41	92	30	52	14	16	M12 x 1.75	10	26	85	M26 x 1.5	40	126	130

Bore size (mm)	φTD <sub>es</sub>	TI	TQ	TT	TX	TY	TZ	W	I	Q	Without rod boot			With rod boot						
											H	Z	ZZ	d	e	f	h	ℓ	Z	ZZ
40	15 <sup>-0.032 -0.059</sup>	20	45	23	85	77.5	115	8	18	38	51	93	221	56	43	11.2	59	1/4 stroke	101	229
50	15 <sup>-0.032 -0.059</sup>	20	50	23	95	87.5	125	0	18	43.5	58	103	231	64	52	11.2	66	1/4 stroke	111	239
63	18 <sup>-0.032 -0.059</sup>	20	57	28	110	102	146	0	18	49	58	107	239	64	52	11.2	66	1/4 stroke	115	247
80	25 <sup>-0.040 -0.073</sup>	24	69.5	35	140	124.5	190	0	20	63	71	129	271	76	65	12.5	80	1/4 stroke	138	280
100	25 <sup>-0.040 -0.073</sup>	24	79.5	43	162	144.5	212	0	20	73	72	135	283	76	65	14.0	81	1/4 stroke	144	292

\* The minimum stroke of the one with rod boot is 20 mm or more.


**Electrical Entry: Dimensions for DIN Terminal**

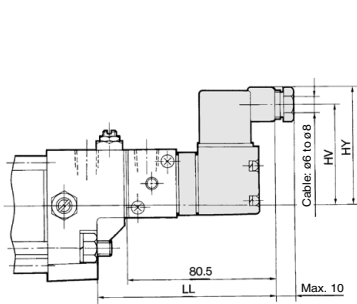

Bore size (mm)	LL	HV	HY
40	95.5	55	64
50	92.5	60	69
63	92.5	68	77
80	93.5	76	85
100	94.5	83	92

**Accessory Dimensions**


**I Type Single Knuckle Joint**



Material: Free cutting sulfur steel (mm)

Part no.	Applicable bore size (mm)	A	A <sub>1</sub>	A <sub>11</sub>	L <sub>1</sub>	MM	R <sub>1</sub>	U <sub>1</sub>	øND <sub>H10</sub>	NX
I-04	40	69	22	24	55	M14 x 1.5	15.5	20	12 <sup>+0.070</sup> <sub>-0.1</sub>	16 <sup>-0.1</sup> <sub>-0.3</sub>
I-05	50, 63	74	27	28	60	M18 x 1.5	15.5	20	12 <sup>+0.070</sup> <sub>-0.1</sub>	16 <sup>-0.1</sup> <sub>-0.3</sub>
I-08	80	91	37	36	71	M22 x 1.5	22.5	26	18 <sup>+0.070</sup> <sub>-0.1</sub>	28 <sup>-0.1</sup> <sub>-0.3</sub>
I-10	100	105	37	40	83	M26 x 1.5	24.5	28	20 <sup>+0.084</sup> <sub>0</sub>	30 <sup>-0.1</sup> <sub>-0.3</sub>

**Y Type Double Knuckle Joint**




Material: Cast iron (mm)

Part no.	Applicable bore size (mm)	A <sub>1</sub>	E <sub>1</sub>	L <sub>1</sub>	MM	R <sub>1</sub>	U <sub>1</sub>	ND	NX	NZ	L	Cotter pin size	Plain washer size
Y-04D	40	22	24	55	M14 x 1.5	13	25	12	16 <sup>+0.3</sup> <sub>-0.1</sub>	38	55.5	ø3 x 18 L	Polished round 12
Y-05D	50, 63	27	28	60	M18 x 1.5	15	27	12	16 <sup>+0.3</sup> <sub>-0.1</sub>	38	55.5	ø3 x 18 L	Polished round 12
Y-08D	80	37	36	71	M22 x 1.5	19	28	18	28 <sup>+0.3</sup> <sub>-0.1</sub>	55	76.5	ø4 x 25 L	Polished round 18
Y-10D	100	37	40	83	M26 x 1.5	21	38	20	30 <sup>+0.3</sup> <sub>-0.1</sub>	61	83	ø4 x 30 L	Polished round 20

\* Knuckle pin, cotter pin, and plain washer are shipped together.

**Clevis Pin**




Material: Carbon steel (mm)

Part no.	Applicable bore size (mm)	øDdg	L	ød	ℓ	Applicable plain washer	Applicable cotter pin
CDP-3A	50	12 <sup>+0.060</sup> <sub>-0.090</sub>	55.5	3	47.5	4.0	3 x 18
CVD-06	63	16 <sup>+0.060</sup> <sub>-0.090</sub>	75	4	65	5.0	Polished round 12 4 x 22
CVD-08	80	20 <sup>+0.060</sup> <sub>-0.117</sub>	94	5	79	7.5	Polished round 16 5 x 30
CVD-10	100	25 <sup>+0.060</sup> <sub>-0.117</sub>	105	5	90	7.5	Polished round 20 5 x 35

\* Cotter pins and flat washers are included.

**Knuckle Pin**




Material: Carbon steel (mm)

Part no.	Applicable bore size (mm)	øDd9	L	ℓ	m	ød (Drill trough)	Applicable cotter pin	Applicable plain washer
CDP-3A	40, 50, 63	12 <sup>+0.060</sup> <sub>-0.090</sub>	55.5	47.5	4	3	ø3 x 18 L	Polished round 12
CDP-5A	80	18 <sup>+0.060</sup> <sub>-0.090</sub>	76.5	66.5	5	4	ø4 x 25 L	Polished round 16
CDP-6A	100	20 <sup>+0.060</sup> <sub>-0.117</sub>	83	73	5	4	ø4 x 30 L	Polished round 20

\* Cotter pins and flat washers are included.

**Rod End Nut**



Material: Rolled steel (mm)

Part no.	Applicable bore size (mm)	d	H	B	C	D
NT-04	40	M14 x 1.5	8	22	25.4	21
NT-05	50, 63	M18 x 1.5	11	27	31.2	26
NT-08	80	M22 x 1.5	13	32	37	31
NT-10	100	M26 x 1.5	16	41	47.3	39

CVQ

CVQM

CVJ

CVM

CV3

CVS1

MVGQ

D-

-X

# Valve Mounted Cylinder: Non-rotating Rod Type

## Double Acting

# CV3K Series

### Non-lube Type: $\varnothing 40, \varnothing 50, \varnothing 63$

#### How to Order

#### Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDV3KL40-100-1

		Suffix for cylinder	
Rod boot	J	Nylon tarpaulin	
	K	Heat resistant tarpaulin	
Cushion	N	Without cushion	
	R	With cushion on rod end	
	H	With cushion on head end	
	Nil	With cushion on both ends	

\* When specifying symbol more than one, combine symbols alphabetically.


Solenoid valve	
Nil	2 position single
W	2 position double

Made to Order  
Refer to page 823 for details.

Solenoid valve voltage	
1	100 VAC (50/60 Hz)
2	200 VAC (50/60 Hz)
5	24 VDC

For other rated voltages, please consult with SMC.

Cylinder stroke (mm)  
Refer to page 823 for standard strokes.

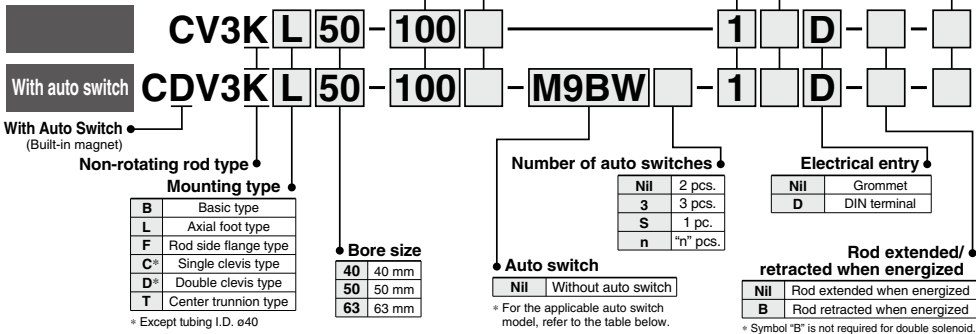

Mounting type	
B	Basic type
L	Axial foot type
F	Rod side flange type
C*	Single clevis type
D*	Double clevis type
T	Center trunnion type

Bore size	
40	40 mm
50	50 mm
63	63 mm

Number of auto switches	
Nil	2 pcs.
3	3 pcs.
S	1 pc.
n	"n" pcs.

Electrical entry	
Nil	Grommet
D	DIN terminal

Rod extended/retracted when energized	
Nil	Rod extended when energized
B	Rod retracted when energized

#### Applicable Auto Switches

Type	Special function	Electrical entry	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load	
				DC	AC	Tie-rod mounting	Band mounting	0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
Solid state auto switch	—	Grommet	3-wire (NPN)	24 V	5 V, 12 V	M9N	●	●	●	○	○	○	IC circuit	Relay, PLC	
			3-wire (PNP)			G59***	●	●	●	○	○				
			2-wire	G5P***	●	●	●	○	○						
		Terminal conduit	3-wire (NPN)	12 V	M9B	●	●	●	○	○					
			2-wire		K59***	●	●	●	○	○					
			3-wire (NPN)	24 V	G39C	●	●	●	○	○					
	2-wire	K39C	●		●	●	○	○							
	Diagnostic indication (2-color indicator)	Grommet	3-wire (NPN)	24 V	5 V, 12 V	M9NW	●	●	●	○	○	IC circuit			
			3-wire (PNP)			G59W***	●	●	●	○	○				
			2-wire	M9PW	●	●	●	○	○						
		Water resistant (2-color indicator)	Grommet	3-wire (NPN)	24 V	5 V, 12 V	M9BW	●	●	●	○		○		IC circuit
				3-wire (PNP)			G59W***	●	●	●	○		○		
2-wire				M9BW	●	●	●	○	○						
With diagnostic output (2-color indicator)	Grommet	3-wire (NPN)	24 V	5 V, 12 V	M9NA-1	○	○	○	○	○	IC circuit				
		3-wire (PNP)			M9PA-1	○	○	○	○	○					
		2-wire	M9BA-1	○	○	○	○	○							
	Terminal conduit	Grommet	4-wire (NPN)	24 V	5 V, 12 V	F59F	●	●	●	○		○	IC circuit		
			3-wire (NPN equivalent)			G59F***	●	●	●	○		○			
			2-wire	A96 (Z)6***	●	●	●	○	○						
Reed auto switch	—	Grommet	2-wire	24 V	12 V	A93 (Z)3***	●	●	●	○	○	IC circuit	Relay, PLC		
						A54	●	●	●	○	○				
			A90 (Z)0***	●	●	●	○	○							
		Terminal conduit	Grommet	2-wire	24 V	12 V	A64	●	●	●	○			○	IC circuit
							A54	●	●	●	○			○	
				A33C	●	●	●	○	○						
	Diagnostic indication (2-color indicator)	Grommet	2-wire	24 V	12 V	A34C	●	●	●	○	○	IC circuit			
						A44C	●	●	●	○	○				
			A44	●	●	●	○	○							
		DIN terminal	Grommet	2-wire	24 V	12 V	A59W	●	●	●	○			○	IC circuit
							B59W***	●	●	●	○			○	
				A44	●	●	●	○	○						

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.  
\*2 1 m type lead wire is only applicable to D-A93.  
\* Lead wire length symbols: 0.5 m.....Nil (Example) M9NW  
1 m.....M (Example) M9NWM  
3 m.....L (Example) M9NLW  
5 m.....Z (Example) M9NZ  
\* Solid state auto switches marked with "○" are produced upon receipt of order.  
\*\*\* D-B5/D-B64/G5/K5 types are mountable only upon a receipt of order. (Not mountable after the time of shipment)  
\*\*\* D-A9□ cannot be mounted on e50. Select auto switches in brackets.  
\* Since there are other applicable auto switches than listed, refer to page 831 for details.  
\* For details about auto switches with pre-wired connector, refer to pages 1014 and 1015.  
\* D-A9□/M9□/M9□/WM9□/A auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled before shipped).



# Valve Mounted Cylinder: Non-rotating Rod Type Double Acting **CV3K Series**

## Adjustable speed.

Built-in throttle valves are provided to enable speed adjustments in each direction.

**Operation type can be changed to rod extended when energized or rod retracted when energized.**

**A manual operation mechanism is provided as standard equipment (non-locking).**


**An auto switch cylinder with the switch installed can also be manufactured.**



PAT.PEND.

### Symbol

Air cushion



## Made to Order Specifications

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC7	Tie-rod, cushion valve, and tie-rod nut made of stainless steel
-XC15	Change of tie-rod length

Refer to pages 826 to 831 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Auto switch mounting bracket: Part no.

## Specifications

Applicable bore size (mm)	40	50	63
<b>Action</b>	Double acting		
<b>Fluid</b>	Air		
<b>Proof pressure</b>	1.35 MPa		
<b>Maximum operating pressure</b>	0.9 MPa		
<b>Minimum operating pressure</b>	0.15 MPa		
<b>Ambient and fluid temperature</b>	-10 to 50°C (No freezing)		
<b>Cushion</b>	Air cushion		
<b>Stroke length tolerance</b>	Up to 250 st <sup>+10</sup> °, 251 to 600 st <sup>+14</sup> °		
<b>Port size</b>	Rc 1/4		
<b>Lubrication</b>	Not required (Non-lube)		
<b>Piston speed</b>	50 to 500 mm/s *		
<b>Rod non-rotating accuracy</b>	±0.8°		
<b>Allowable rotational torque</b>	0.44 N·m or less		
<b>Mouting</b>	Basic type, Axial foot type, Rod side flange type, Single clevis type, Double clevis type, Center trunnion type		
<b>Allowable kinetic energy</b>	2.4 J	4.4 J	7.8 J

\* Operate within the range of absorbed energy.

## Solenoid Valve Specifications

<b>Applicable solenoid valve model</b>	V3□08			
<b>Coil rated voltage</b>	100/200 VAC (50/60 Hz), 24 VDC			
<b>Effective area of valve (Cv factor)</b>	18 mm <sup>2</sup> (1.0)			
<b>Electrical entry</b>	Grommet, DIN terminal			
<b>Allowable voltage</b>	-15 to 10% of the rated voltage			
<b>Coil insulation</b>	Class B or equivalent (130°C)			
<b>Apparent power</b> <sup>Note)</sup>	AC	Inrush	50 Hz	8.5 VA
			60 Hz	7.5 VA
		Holding	50 Hz	7.0 VA
			60 Hz	5.5 VA
<b>Power consumption</b> <sup>Note)</sup>	DC	6 W		

Note) At the rated voltage.


## Standard Stroke

Bore size (mm)	Standard stroke (mm)
<b>40</b>	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500*
<b>50, 63</b>	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500, 600*

Note) The cylinders with the standard strokes indicated above can be delivered in a short term. Intermediate stroke except mentioned above is manufactured upon receipt of order.  
 • When the auto switch is attached, the minimum stroke is going to be different. Refer to pages 828 and 829.  
 The minimum stroke length is different in the trunnion type. Refer to pages 828 and 829 for further information.

Please consult with SMC for longer strokes than the strokes marked with \*.

## Opening Range of Throttle Valve and Driving Speed



Conditions: Operating pressure 0.5 MPa, Horizontal mounting, No load, Spring return side  
 • The speeds shown in the graph are for reference.

## Rod Boot Material

Symbol	Rod boot material	Max. ambient temperature
<b>J</b>	Nylon tarpaulin	70°C
<b>K</b>	Heat resistant tarpaulin	110°C*

\* Maximum ambient temperature for the rod boot itself.

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

-X□

# CV3K Series

## Weight

(kg)

Bore size (mm)		40	50	63
Basic weight	Basic type	1.30	1.73	2.57
	Foot type	1.47	1.93	2.86
	Rod side flange type	1.56	2.14	3.19
	Single clevis type	—	2.46	3.68
	Double clevis type	—	2.51	3.73
	Trunnion type	1.95	2.52	3.96
Additional weight per each 50 mm of stroke		0.22	0.28	0.37
Accessory bracket	Single knuckle	0.23	0.26	0.26
	Double knuckle (with pin)	0.37	0.43	0.43

Calculation: (Example) **CV3KL40-100-1**

- Basic weight:.....1.47 (kg)
- Additional weight:.....0.22 (kg/50 st)
- Cylinder stroke:.....100 (st)  $1.47 + 0.22 \times 100 \div 50 = 1.91$  kg

## Accessory

Mounting		Basic type	Foot type	Rod side flange type	Single clevis type	Double * clevis type	Center trunnion type
Standard equipment	Rod end nut	●	●	●	●	●	●
	Clevis pin	—	—	—	—	●	—
Option	Single knuckle joint	●	●	●	●	●	●
	Double knuckle joint * (with pin)	●	●	●	●	●	●
	With rod boot	●	●	●	●	●	●

- \* Pin, plain washer and cotter pin are shipped together with double clevis and double knuckle joint.
- \* Refer to page 821 for dimensions and part numbers of the option.

Refer to page 825 for dimensions of the rod boot.

## Handling

1. Adjusting of the piston speed
2. Change of voltage specifications
3. Manual operation
4. Changing between rod extended when energized and rod retracted when energized.

Since the operations above 1. to 4. are the same as the CV3 Series, refer to page 816.

## ⚠ Precautions


- Be sure to read this before handling the products.
- Refer to back page 50 for Safety Instructions and pages 722 to 724 for Common Precautions.

## Operating Precautions

### ⚠ Caution

1. Avoid using the air cylinder in such a way that rotational torque would be applied to the piston rod.

If rotational torque is applied, the non-rotating guide will become deformed, causing a loss of non-rotating accuracy. Also, to screw a bracket or a nut onto the threaded portion at the end of the piston rod, make sure the retract the piston rod entirely, and place a wrench on the parallel sections of the rod that protrudes. To tighten, take precautions to prevent the tightening torque from being applied to the non-rotating guide.



## Disassembly/Replacement

### ⚠ Caution

1. When replacing rod seals, please contact SMC.  
Air leakage may be happened, depending on the position in which a rod seal is fitted. Thus, please contact SMC when replacing them.


## Selection

### ⚠ Warning

1. Confirm the specifications.  
Products in this catalog are designed to be used for compressed air systems. If not operated within the designated pressure or temperature, it may damage the products or cause malfunction. (Refer to specifications.)
2. Energizing continuously for a long period of time  
When the valve is continuously energized for a long period of time, the performance may deteriorate or effect peripheral equipment adversely since temperature rises when coils generate heat.

# Valve Mounted Cylinder: Non-rotating Rod Type Double Acting **CV3K Series**

## Construction

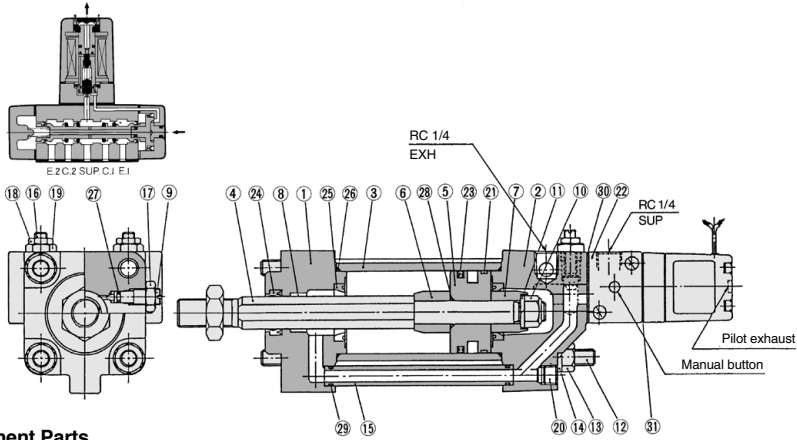

### Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Matt black painted
2	Head cover	Aluminum alloy	Matt black painted
3	Cylinder tube	Aluminum alloy	Hard anodized
4	Piston rod	Carbon steel	Hard chrome plated
5	Piston	Aluminum alloy	Chromated
6	Cushion ring A	Rolled steel	Zinc chromated
7	Cushion ring B	Rolled steel	Zinc chromated
8	Non-rotating guide	Oil impregnated sintered alloy	
9	Cushion valve	Rolled steel	Electroless nickel plated
10	Piston nut	Rolled steel	Zinc chromated
11	Spring washer	Steel wire	Zinc chromated
12	Tie-rod	Carbon steel	Zinc chromated
13	Tie-rod nut	Carbon steel	Black zinc chromated
14	Spring washer	Steel wire	Black zinc chromated
15	Pipe	Carbon steel tube	Uni-chromated
16	Needle	Sulfur easy chipping steel	Electroless nickel plated
17	lock nut	Carbon steel	Nickel plated
18	lock nut	Carbon steel	Nickel plated

No.	Description	Material	Note	
19	Needle guide	Sulfur easy chipping steel	Electroless nickel plated	
20	Plug	Chromium molybdenum steel	Black zinc chromated	
21	Wear ring	Resin		
No.	Description	No. of solenoids	Rod extended when energized	Rod retracted when energized
22	Solenoid valve	Single	(1)	(2)
		Double	(3)	(3)

\* How to order solenoid valves

Note 1) V3108-00	Voltage	Electrical entry
Note 2) V3108-00	Voltage	Electrical entry
Note 3) V3208-00	Voltage	Electrical entry

\*X23

No.	Description	Material	Note
23	Piston seal	NBR	
24	Rod seal	NBR	
25*	Cushion seal	NBR	
26	Cylinder tube gasket	NBR	
27	Cushion valve seal	NBR	

No.	Description	Material	Note
28*	Piston gasket	NBR	
29	Pipe gasket	NBR	
30	Head cover gasket	NBR	
31	Single solenoid gasket	NBR	
	Double solenoid gasket	NBR	

\* Not replaceable.


### Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
40	CV3K40-PS	Set of nos. above 23, 24,
50	CV3K50-PS	25, 27, 29, 30,
63	CV3K63-PS	26, 27, 29, 30.

\* Seal kit includes 23, 24, 26, 27, 29, 30. Order the seal kit, based on each bore size. (Not possible to replace 25, 28.)

\* Seal kit includes a grease pack (ø40, ø50: 10 g, ø63 or more: 20 g).  
Order with the following part number when only the grease pack is needed.  
**Grease pack part no.:** GR-S-010 (10 g), GR-S-020 (20 g)

## Basic Type: CV3KB□

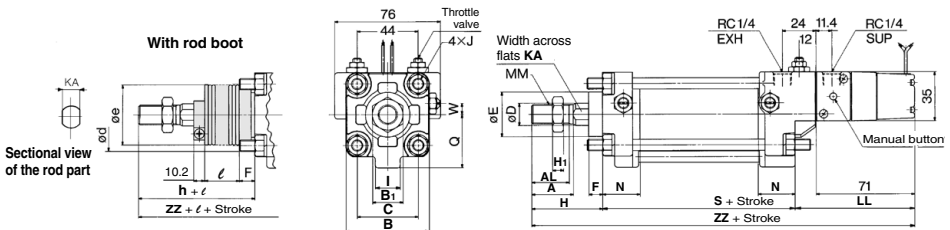

Bore size (mm)	Stroke range (mm)*	A	AL	B	B <sub>1</sub>	C	D	E	F	H <sub>1</sub>	I	J	KA	LL	MM	N	Q	S
40	Up to 500	30	27	60	22	44	16	32	10	8	18	M8 x 1.25	14	86	M14 x 1.5	27	38	84
50	Up to 600	35	32	70	27	52	20	40	10	11	18	M8 x 1.25	18	83	M18 x 1.5	30	43.5	90
63	Up to 600	35	32	85	27	64	20	40	10	11	18	M10 x 1.25	18	83	M18 x 1.5	31	49	98

Bore size (mm)	W	Without rod boot							With rod boot			
		H	ZZ	d	e	f	h	I	ZZ			
40	8	51	221	56	43	11.2	59	1/4 stroke	229			
50	0	58	231	64	52	11.2	66	1/4 stroke	239			
63	0	58	239	64	52	11.2	66	1/4 stroke	247			

\* The minimum stroke of the one with rod boot is 20 mm or more.  
\*\* For dimensions of DIN terminal, refer to page 821.

- External dimensions of each mounting bracket other than basic type are the same, except KA dimension. Refer to pages 818 to 821.
- For accessory, refer to page 821.




# Auto Switch Mounting 1

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height


<Band mounting type>

D-B5□/B64/B59W

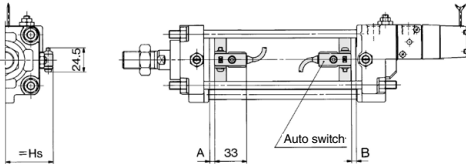

D-A3□


D-G39/K39

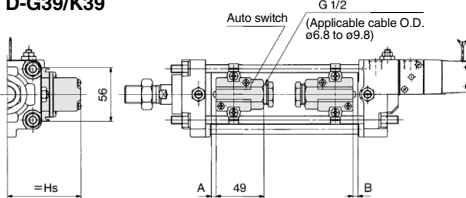


D-G5□/K59

D-G5□W/K59W

D-G59F/G5NT

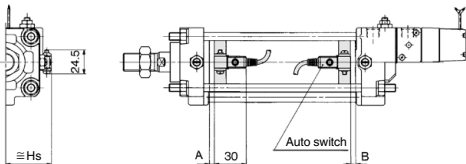

D-A44

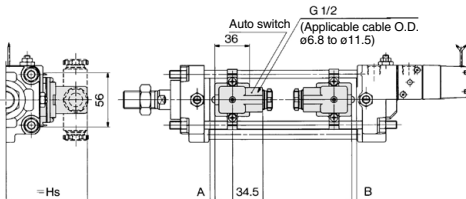

<Tie-rod mounting type>

D-A9□/A9□V

D-M9□/M9□V


D-M9□W/M9□WV

D-M9□A/M9□AV

D-Z7□/Z80


D-Y59□/Y69□/Y7P/Y7PV

D-Y7□W/Y7□WV

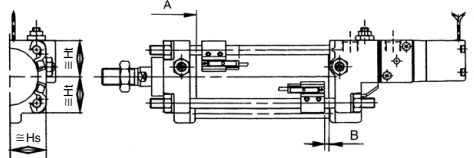


D-A5□/A6□

D-A59W

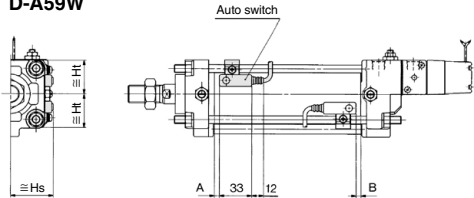

D-A3□C

D-G39C/K39C

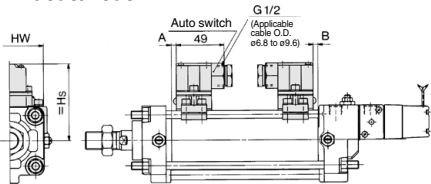


D-F5□/J59

D-F5NT


D-F5□W/J59W

D-F59F

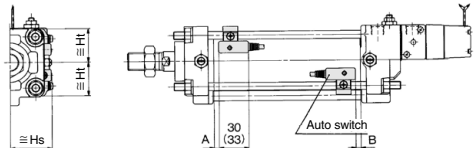

( ): Denotes the values of D-F5LF.

D-A44C

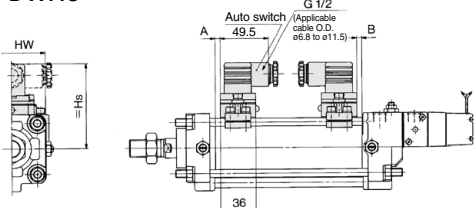

**Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height**

**Auto Switch Proper Mounting Position**

(mm)

Auto switch model	D-A9□ D-A9□V		D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□A D-M9□AV		D-A5□ D-A6□ D-A3□ D-A3□C D-A44/A44C D-G39/G39C D-K39/K39C		D-B5□ D-B64		D-F5□ D-J59 D-F5□W D-J59W D-F59F		D-G5□W D-K59W D-G59F D-G5□ D-K59 D-G5NT		D-A59W		D-F5NT		D-B59W D-Z7□ D-Z80 D-Y59□ D-Y69□ D-Y7P D-Y7PW D-Y7□W D-Y7□WV			
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
40	3 (6)	7 (4)	7 (10)	11 (8)	0 (0)	1 (0)	0 (0.5)	1.5 (0)	3.5 (6.5)	7.5 (4.5)	0 (2)	3 (0)	1 (4)	5 (2)	8.5 (11.5)	12.5 (9.5)	0.5 (3.5)	4.5 (1.5)		
50	—	—	7 (10)	11 (8)	0 (0)	1 (0)	0 (0.5)	1.5 (0)	3.5 (6.5)	7.5 (4.5)	0 (2)	3 (0)	1 (4)	5 (2)	8.5 (11.5)	12.5 (9.5)	0.5 (3.5)	4.5 (1.5)		
63	5 (8.5)	11 (7.5)	9 (12.5)	15 (11.5)	0 (2.5)	5.5 (1.5)	0 (3)	6 (2)	5.5 (9)	12 (8)	1 (4.5)	7.5 (3.5)	3 (6.5)	9.5 (5.5)	10.5 (14)	17 (13)	2.5 (6)	9 (5)		
80	8 (12)	14 (10)	12 (16)	18 (14)	2 (6)	8.5 (4)	2.5 (6.5)	9 (4.5)	8.5 (12.5)	15 (10.5)	4 (8)	10.5 (6)	6 (10)	12.5 (8)	13.5 (17.5)	20 (15.5)	5.5 (9.5)	12 (7.5)		
100	10 (13.5)	16 (12.5)	14 (17.5)	20 (16.5)	4 (7.5)	10.5 (6.5)	4.5 (8)	11 (7)	10.5 (14)	17 (13)	6 (9.5)	12.5 (8.5)	8 (11.5)	14.5 (10.5)	15.5 (19)	22 (18)	7.5 (11)	14 (10)		

Note 1) ( ): Denotes the values of non-lube type.  
 Note 2) D-G5□W/K59W/G59F types cannot be mounted on the ø40 or ø50 lube type.  
 Note 3) D-B5□, D-G5□ and D-K5□ types are mountable only upon a receipt of order. (Not mountable after the time of shipment)  
 Note 4) D-A9□ and D-A9□V types cannot be mounted on ø50  
 Note 5) Adjust the auto switch after confirming the operating conditions in the actual setting.

CVQ

CVQM

CVQ□

CVM□

CV3

CVS1

MVGQ

**Auto Switch Mounting Height**

(mm)

Auto switch model	D-A9□ D-M9□ D-M9□W D-M9□A		D-A9□V		D-M9□V D-M9□WV D-M9□AV		D-B5□ D-B64 D-B59W		D-A3□ D-G39 D-K39		D-A44		D-A5□ D-A6□ D-A59W		D-F5□ D-J59 D-F5□W D-J59W D-F59F D-F5NT		D-A3□C D-G39C D-K39C		D-A44C		D-Z7□ D-Z80 D-Y59□ D-Y7P D-Y7□W		D-Y69□ D-Y7PW D-Y7□WV		
	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs
40	30	30	32	30	35	30	38	72.5	80.5	40	31	38.5	31	73	69	81	69	30	30	30.5	30				
50	34	34	—	—	39	34	43.5	78	86	43.5	35	42.5	35	78.5	77	86.5	77	34	34	35	34				
63	41	41	43.5	41	46	41	50.5	85	93	49	42	48	42	85.5	91	93.5	91	41	41	42.5	41				
80	49.5	49	51.5	49	54	49	59	93.5	101.5	55.5	50	54	50	94	107	102	107	49.5	48.5	51	48.5				
100	57	56	59.5	56	62.5	56	69.5	104	112	63	57.5	62	57.5	104	121	112	121	58.5	56	59	56				

\* D-A9□ and D-A9□V types cannot be mounted on ø50

D-□

-X□

# Auto Switch Mounting 2

## Minimum Stroke For Auto Switch Mounting

n: Number of auto switches (mm)

Auto switch model	No. of auto switches mounted	Mounting brackets other than center trunnion	Center trunnion				
			ø40	ø50	ø63	ø80	ø100
D-A9□	2 (Different surfaces, Same surface), 1	15	80	—	90	105	115
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>		$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$115 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>
D-A9□V	2 (Different surfaces, Same surface), 1	10	80	—	90	105	115
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>		$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$105 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$115 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>
D-M9□ D-M9□W D-M9□A	2 (Different surfaces, Same surface), 1	15	85	100	115	120	
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$100 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$115 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$120 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	
D-M9□V D-M9□WV D-M9□AV	2 (Different surfaces, Same surface), 1	10	85	100	115	120	
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$85 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$100 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$115 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$120 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	
D-A5□/A6□ D-F5□/J59 D-F5□W/J59W D-F59F	2 (Different surfaces, Same surface), 1	15	90	100	110	120	
	n (Same surface)	$15 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$90 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$100 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	
D-A59W	2 (Different surfaces, Same surface)	20	90	100	110	120	
	n (Same surface)	$20 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$90 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$100 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	
	1	15	90	100	110	120	
D-F5NT	2 (Different surfaces, Same surface), 1	25	110	120	130	140	
	n (Same surface)	$25 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$130 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$140 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	
D-B5□/B64 D-G5□/K59 D-G5□W D-K59W D-G59F D-G5NT	2	Different surfaces	15	90	100	110	
		Same surface	75				
	n	Different surfaces	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$90 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$100 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$110 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	
		Same surface	$75 + 50 (n-2)$ (n = 2, 4, 6, 8...)	$90 + 50 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$100 + 50 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$110 + 50 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
		1	10	90	100	110	
D-B59W	2	Different surfaces	20	90	100	110	
		Same surface	75				
	n	Different surfaces	$20 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$90 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$100 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$110 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	
		Same surface	$75 + 50 (n-2)$ (n = 2, 3, 4, ...)	$90 + 50 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$100 + 50 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$110 + 50 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
		1	15	90	100	110	
D-A3□ D-G39 D-K39	2	Different surfaces	35	100	100	110	
		Same surface	100				
	n	Different surfaces	$35 + 30 (n-2)$ (n = 2, 3, 4, ...)	$100 + 30 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$100 + 30 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$110 + 30 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
		Same surface	$100 + 100 (n-2)$ (n = 2, 3, 4, ...)	$100 + 100 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$100 + 100 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$110 + 100 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
1	10	100	100	110			
D-A44	2	Different surfaces	35	90	100	110	
		Same surface	55				
	n	Different surfaces	$35 + 30 (n-2)$ (n = 2, 3, 4, ...)	$90 + 30 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$100 + 30 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$110 + 30 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
		Same surface	$55 + 50 (n-2)$ (n = 2, 3, 4, ...)	$90 + 50 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$100 + 50 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$110 + 50 (n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
		1	10	90	100	110	

Note 1) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.

Note 2) When "n" is an odd number, a multiple of 4 that is larger than this odd number is used for the calculation.

## Minimum Stroke For Auto Switch Mounting

n: Number of auto switches (mm)

Auto switch model	No. of auto switches mounted	Mounting brackets other than center trunnion	Center trunnion				
			ø40	ø50	ø63	ø80	ø100
<b>D-A3□C</b> <b>D-G39C</b> <b>D-K39C</b>	2	Different surfaces	20		100	100	110
		Same surface	100				
	n	Different surfaces	$20 + 35(n-2)$ (n = 2, 3, 4, ...)	$100 + 35(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>		$100 + 35(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$110 + 35(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>
		Same surface	$100 + 100(n-2)$ (n = 2, 3, 4, 5, ...)	$100 + 100(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>		$110 + 100(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
		1	10	100	100	110	
<b>D-A44C</b>	2	Different surfaces	20		90	100	110
		Same surface	55				
	n	Different surfaces	$25 + 35(n-2)$ (n = 2, 3, 4, ...)	$90 + 35(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>		$100 + 35(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$110 + 35(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>
		Same surface	$55 + 50(n-2)$ (n = 2, 3, 4, ...)	$90 + 50(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>		$100 + 35(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$110 + 50(n-2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>
		1	10	90	100	110	
<b>D-Z7□/Z80</b> <b>D-Y59□/Y7P</b> <b>D-Y7□W</b>	2 (Different surfaces, Same surface), 1	15	80	85	90	95	105
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$95 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>
<b>D-Y69□/Y7PV</b> <b>D-Y7□WV</b>	2 (Different surfaces, Same surface), 1	10	65		75	80	90
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>		$75 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>

Note 1) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.

Note 2) When "n" is an odd number, a multiple of 4 that is larger than this odd number is used for the calculation.

**CVQ**

**CVQM**

**CVJ□**

**CVM□**

**CV3**

**CVS1**

**MVGQ**

**D-□**

**-X□**

## Operating Range


Auto switch model	Bore size (mm)				
	40	50	63	80	100
D-A9□/A9□V	7	—	9	9	9
D-M9□/M9□V D-M9□W/M9□WV D-M9□A/M9□AV	4.5	5	5.5	5	6
D-Z7□/Z80	8	7	9	9.5	10.5
D-A3□/A44 D-A3□C/A44C	9	10	11	11	11
D-A5□/A6□					
D-B5□/B64					
D-A59W	13	13	14	14	15
D-B59W	14	14	17	16	18
D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV	8	7	5.5	6.5	6.5
D-F5□/J59 D-F5□W/J59W D-F5NT/F59F	4	4	4.5	4.5	4.5
D-G5□/K59 D-G5□W/K59W D-G5NT/G59F	5	6	6.5	6.5	7
D-G39/K39 D-G39C/K39C	9	9	10	10	11

- \* D-A9□ and D-A9□V types cannot be mounted on  $\phi 50$ .
- \* Since this is a guideline including hysteresis, not meant to be guaranteed. (Assuming approximately  $\pm 30\%$  dispersion.) There may be the case it will vary substantially depending on an ambient environment.

## Auto Switch Mounting Bracket Part No.

### <Tie-rod mounting type>

Auto switch model	Bore size (mm)				
	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
D-A9□/A9□V D-M9□/M9□V D-M9□W/M9□WV D-M9□A/M9□AV	BA7-040	BA7-040	BA7-063	BA7-080	BA7-080
D-A5□/A6□/A59W D-F5□/J59/F5□W/J59W D-F5NT/F59F	BT-04	BT-04	BT-06	BT-08	BT-08
D-A3□C/A44C/G39C/K39C	BA3-040	BA3-050	BA3-063	BA3-080	BA3-100
D-Z7□/Z80 D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV	BA4-040	BA4-040	BA4-063	BA4-080	BA4-080



• Mounting example of D-A9□(V)/M9□(V)/M9□W(V)/M9□A(V)

### <Band mounting type>

Auto switch model	Bore size (mm)				
	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
D-A3□/A44/G39/K39	BD1-04M	BD1-05M	BD1-06M	BD1-08M	BD1-10M
D-B5□/B64/B59W D-G5□/K59/G5□W/K59W D-G59F/G59T	BA-04	BA-05	BA-06	BA-08	BA-10

- \* D-A9□ and D-A9□V types cannot be mounted on  $\phi 50$ .
- \* Auto switch mounting brackets are included in D-A3□C/A44C/G39C/K39C. When the auto switch mounting bracket is needed separately, order it with the above part number. When ordering an auto switch alone, specify it as shown below according to the cylinder size.  
Ex.)  $\phi 40$ : D-A3□C-4,  $\phi 50$ : D-A3□C-5  
 $\phi 63$ : D-A3□C-6,  $\phi 80$ : D-A3□C-8,  $\phi 100$ : D-A3□C-10

Other than the models listed in "How to Order", the following auto switches are applicable.  
For detailed specifications, refer to pages 941 to 1067.

Auto switch type	Model	Electrical entry (Fetching direction)	Features
<b>Reed</b>	D-A93V, A96V	Grommet (Perpendicular)	—
	D-A90V		Without indicator light
	D-A53, A56, B53, Z73, Z76	Grommet (In-line)	—
	D-A67, Z80		Without indicator light
<b>Solid state</b>	D-M9NV, M9PV, M9BV	Grommet (Perpendicular)	—
	D-Y69A, Y69B, Y7PV		Diagnostic indication (2-color indicator)
	D-M9NWW, M9PWV, M9BWW		Water resistant (2-color indicator)
	D-Y7NWW, Y7PWV, Y7BWW		—
	D-M9NAV, M9PAV, M9BAV	Grommet (In-line)	—
	D-Y59A, Y59B, Y7P		Diagnostic indication (2-color indicator)
	D-F59, F5P, J59		—
	D-Y7NW, Y7PW, Y7BW		Diagnostic indication (2-color indicator)
	D-F59W, F5PW, J59W		—
	D-F5NT, G5NT		With timer

\* With pre-wired connector is also available in solid state auto switches.  
For details, refer to pages 1014 and 1015.

\* Normally closed (NC = b contact), solid state auto switch (D-F9G/F9H/Y7G/Y7H type) are also available. For details, refer to pages 959 and 961.

**CVQ**

**CVQM**

**CVJ**

**CVM**

**CV3**

**CVS1**

**MVGQ**

**D**-

**-X**

# Valve Mounted Cylinder Double Acting CVS1 Series

ø40, ø50, ø63, ø80, ø100

## How to Order

Mounting type	Port thread type	Cylinder stroke (mm)	Electrical entry
B Basic type	Nil Rc	Refer to page 833 for standard strokes.	Nil Grommet
L Axial foot type	TN NPT		T Conduit terminal
F Rod side flange type	TF G		D DIN terminal
C Head side flange type			DL DIN terminal with indicator light
G Single clevis type			TZ Conduit terminal with surge voltage suppressor
D Double clevis type			
T Center trunnion type			

Bore size	Solenoid valve
40 40 mm	Nil 2 position single (VS4124-00□□-X46)
50 50 mm	W 2 position double (VS4224-00□□)
63 63 mm	Y 3 position closed center (VS4324-00□□)
80 80 mm	Z 3 position exhaust center (VS4424-00□□)
100 100 mm	

**Example Order:** CVS1 L N 40 - 100 - 1 W D

**With auto switch:** CDVS1 L N 40 - 100 - M9BW - 1 W D

With Auto Switch (Built-in magnet)	Cushion	Suffix for cylinder	Number of auto switches	Solenoid valve voltage
Nil Aluminum tube	Nil Not available with auto switch.	J Nylon tarpaulin	Nil 2 pcs.	S 1 pc.
FN* Steel tube	R With cushion on rod end	K Heat resistant tarpaulin	3 3 pcs.	n "n" pcs.
	H With cushion on head end	N Rubber bumper		
	Nil With cushion on both ends	R With cushion on rod end		

\* When specifying symbol more than one, combine symbols alphabetically.

\* For the applicable auto switch model, refer to the table below.

## Applicable Auto Switches

Refer to pages 941 to 1067 for further information on auto switches.

Type	Special function	Electrical entry	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load	
				DC	AC	Tie-rod mounting	Band mounting	0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
Solid state auto switch	—	Grommet	3-wire (NPN)	24 V	5 V, 12 V	—	M9N	●	●	○	○	○	IC circuit	Relay, PLC	
			3-wire (PNP)				G59**	●	—	●	○	○			
		2-wire	12 V	M9B	●	●	●	○	○	—					
		3-wire (NPN)	12 V	G39C	G39	—	—	—	—	—	—				
	Diagnostic indication (2-color indicator)	Terminal conduit	2-wire	24 V	5 V, 12 V	—	K39C	K39	—	—	—	—	—		
			3-wire (NPN)				M9NW	●	●	●	○	○	IC circuit		
	Water resistant (2-color indicator)	Grommet	3-wire (NPN)	24 V	12 V	—	M9PW	●	●	●	○	○	—		
			3-wire (PNP)				G5PW**	●	●	●	○	○	—		
			2-wire				M9BW	●	●	●	○	○	—		
			3-wire (NPN)				M9NA*1	—	○	○	○	○	○		IC circuit
Reed auto switch	—	Grommet	2-wire	24 V	12 V	—	M9PA*1	—	○	○	●	○	○	—	
							M9BA*1	—	○	○	●	○	○	—	
		Terminal conduit	Yes	2-wire	24 V	12 V	—	F59F	G59F**	●	—	●	○	○	IC circuit
								A54	B54**	●	—	●	○	○	—
		DIN terminal	Yes	2-wire	24 V	12 V	—	A64	B64**	●	—	●	○	○	—
								A33C	A33	—	—	—	—	—	—
Diagnostic indication (2-color indicator)	Grommet	2-wire	24 V	12 V	—	A34C	A34	—	—	—	—	—	—		
						A44C	A44	—	—	—	—	—	—	—	

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Consult with SMC regarding water resistant types with the above model numbers.

\*2 1 m type lead wire is only applicable to D-A93.

\* Lead wire length symbols: 0.5 m.....Nil (Example) M9NW  
1 m.....M (Example) M9NWM  
3 m.....L (Example) M9NWL  
5 m.....Z (Example) M9NVZ

\* Solid state auto switches marked with "○" are produced upon receipt of order.

\*\* D-B5□/G5□/K3□ types are mountable only upon a receipt of order. (Not mountable after the time of shipment)

\*\*\* D-A9□ cannot be mounted on ø50. Select auto switches in brackets.

\* Since there are other applicable auto switches than listed, refer to page 849 for details.

\* For details about auto switches with pre-wired connector, refer to pages 1014 and 1015.

\* D-AR□/M9□/M9□-W/M9□-A auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled before shipped.)

**Speed controller installed**

Operation type can be changed to rod extended when energized or rod retracted when energized.

A selection of solenoid valves is possible.


Single, double and 3 position solenoid valves are mountable.

An auto switch cylinder with the switch installed can also be manufactured.



**Symbol**

Air cushion



**Made to Order Specifications**

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC4	With heavy duty scraper
-XC6	Made of stainless steel
-XC7	Tie-rod, cushion valve, and tie-rod nut made of stainless steel
-XC14	Change of trunnion bracket mounting position
-XC15	Change of tie-rod length
-XC22	Fluororubber seals
-XC27	Double clevis and double knuckle joint pins made of stainless steel
-XC28	Compact flange made of SS400
-XC29	Double knuckle joint with spring pin
-XC35	With coil scraper
-XC65	-XC6 + -XC7

Refer to pages 844 to 849 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Auto switch mounting bracket: Part no.

**Specifications**

Bore size (mm)		40	50	63	80	100	
Fluid	Air						
Action	Double acting						
Proof pressure	1.5 MPa						
Maximum operating pressure	1.0 MPa						
Ambient and fluid temperatures	-10 to 60°C *1						
Minimum operating pressure	0.05 MPa						
Piston speed	50 to 500 mm/s *3						
Cushion	Air cushion or Rubber bumper						
Stroke length tolerance	Up to 250 <sup>+0.10</sup> , 251 to 1000 <sup>+0.14</sup>						
Lubrication	Not required (Non-lube)						
Mounting	Basic type, Foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Center trunnion type						
Port size	Rc 1/4						
Allowable kinetic energy (J) *2	Air cushion	When activated	2.8	4.6	7.8	16	29
		When not activated	0.33	0.56	0.91	1.5	2.68
	Rubber bumper	1.8	3.6	6.0	12.0	12.0	

\*1 No freezing

\*2 Activate the air cushion when operating the cylinder. If this is not done, the piston rod assembly or the tie-rods will be damaged when the allowable kinetic energy exceeds the values shown in the above table.

\*3 For operating piston speed for each size, refer to page 834.

**Solenoid Valve Specifications**

Applicable solenoid valve model	VS4□24			
Coil rated voltage	Refer to the solenoid valve voltage shown below.			
Electrical entry	Grommet, Conduit terminal, DIN terminal, DIN terminal with indicator light, Conduit terminal with surge voltage suppressor			
Allowable voltage	-15 to 10% of the rated voltage			
Coil insulation	Class B or equivalent (130°C)			
Apparent power <sup>Note)</sup>	AC	Inrush	50 Hz	100 VA
			60 Hz	90 VA
		Holding	50 Hz	20 VA
			60 Hz	14 VA
Power consumption <sup>Note)</sup>	DC	13.2 W		

Note) At the rated voltage.

**Solenoid valve voltage**

1	100 VAC (50/60 Hz)
2	200 VAC (50/60 Hz)
3	110 VAC (50/60 Hz)
4	220 VAC (50/60 Hz)
5	24 VDC
6	12 VDC
7	240 VAC (50/60 Hz)
8	48 VAC (50/60 Hz)
B	24 VAC (50/60 Hz)
P	100 VDC
W	32 VDC
Y	48 VDC
Z	110 VDC

For other rated voltages, please contact SMC.

**Standard Strokes**

Bore size	Standard stroke (mm)	
	Stroke range ①	Stroke range ②
40	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500	Up to 1000
	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500, 600	
50, 63	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500, 600	Up to 1000
	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500, 600, 700	

Note 1) Intermediate strokes not listed above are produced upon receipt of order.

Note 2) Applicable strokes should be confirmed according to the usage. For details, refer to "Air Cylinders Model Selection" on front matter pages of the Best Pneumatics No. 2 or the Web Catalog. In addition, the products that exceed the stroke range ① might not be able to fulfill the specifications due to the deflection etc.

Note 3) Please consult with SMC for manufacturability and the part numbers when exceeding the stroke range ②.

Note 4) The minimum stroke length is different in the trunnion type and types with auto switch. Refer to pages 828 and 829.

**Rod Boot Material**

Symbol	Rod boot material	Max. ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C *

\* Maximum ambient temperature for the rod boot itself.

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

-X□



# CVS1 Series

## Accessory

Mounting		Basic type	Axial foot type	Rod side flange type	Head side flange type	Single clevis type	Double clevis* type	Center trunnion type
Standard equipment	Rod end nut	●	●	●	●	●	●	●
	Clevis pin	—	—	—	—	—	●	—
Option	Single knuckle joint	●	●	●	●	●	●	●
	Double knuckle joint* (with pin)	●	●	●	●	●	●	●
	With rod boot	●	●	●	●	●	●	●

\* Pin, plain washer and cotter pin are packaged together with double clevis and double knuckle joint.

\* Refer to page 839 for dimensions and part numbers of the option.  
Refer to page 836 for dimensions of the rod boot.

## Weight

(kg)

Bore size (mm)		40	50	63	80	100
Basic weight	Basic type	2.32(2.42)	2.73(2.86)	3.67(3.88)	5.25(5.56)	6.81(7.21)
	Axial foot type	2.49(2.59)	2.93(3.06)	3.96(4.17)	6.04(6.35)	7.74(8.14)
	Rod side flange type	2.72(2.82)	3.33(3.46)	4.63(4.84)	7.09(7.40)	9.13(9.53)
	Head side flange type	2.82(2.92)	3.47(3.60)	4.63(4.84)	7.09(7.40)	9.13(9.53)
	Single clevis type	2.58(2.68)	3.17(3.30)	4.42(4.63)	6.63(6.94)	9.11(9.51)
	Double clevis type	2.57(2.67)	3.15(3.28)	4.44(4.65)	6.62(6.93)	9.13(9.53)
	Trunnion type	2.92(3.07)	3.47(3.66)	5.01(5.38)	7.58(8.03)	10.33(10.92)
Additional weight per each 50 mm of stroke		0.20(0.28)	0.25(0.35)	0.31(0.43)	0.46(0.70)	0.58(0.87)
Accessory bracket	Single knuckle	0.23	0.26	0.26	0.60	0.83
	Double knuckle (with pin)	0.37	0.43	0.43	0.87	1.27

Calculation: (Example) **CVS1L40-100-1**

• Basic weight.....2.48 (kg)

• Additional weight.....0.20 (kg/50 st)

• Cylinder stroke.....100 (st)  $2.48 + 0.20 \times 100 + 50 = 2.88$  kg

\* ( ): Steel tube type

## Mounting Bracket Part No.

Bore size (mm)	40	50	63	80	100
Axial foot*	CA1-L04	CA1-L05	CA1-L06	CA1-L08	CA1-L10
Flange	CA1-F04	CA1-F05	CA1-F06	CA1-F08	CA1-F10
Single clevis	CA1-C04	CA1-C05	CA1-C06	CA1-C08	CA1-C10
Double clevis**	CA1-D04	CA1-D05	CA1-D06	CA1-D08	CA1-D10


\* Order two foot brackets per cylinder.

\*\* Accessories for each mounting bracket are as follows.

Foot, Flange, Single clevis: Body mounting bolts, Spring washer

Double clevis: Body mounting bolts, Spring washer, Clevis pin, Flat washer, Cotter pin.


## Opening Range of Throttle Valve and Piston Speed



Conditions: Operating pressure 0.5 MPa,  
Horizontal mounting, No load, Extending stroke  
• The speed shown above are for reference.


## Piston Speed Adjustment Procedure

- To slow down the piston speed, screw in the speed controller needle clockwise, which reduces the amount of air that is discharged.
- The speed controller needle opens fully when it is loosened 3 1/2 turns from its fully closed position. After the specified speed has been set, secure the needle with the lock nut.




## Changing between Rod Extended when Energized and Rod Retracted when Energized

- This is possible by reversing the SUP port and EXH port piping.




- This is possible by inverting the solenoid valve direction 180°.




## Manual Operation

Using a screwdriver or its equivalent, push the center of the rubber plug on the head of the solenoid cap of the solenoid valve.

(It is not necessary to remove the rubber plug.)



## Construction

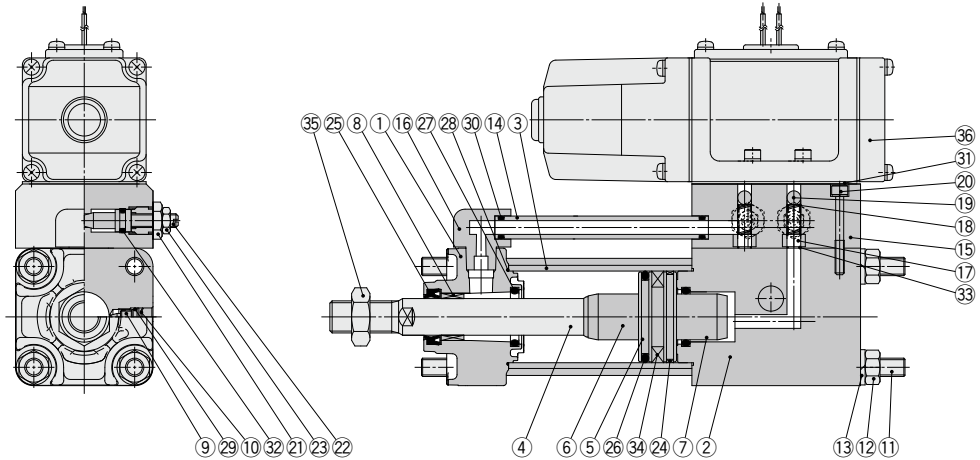

### Component Parts

No.	Description	Material	Qty	Note
1	Rod cover	Aluminum die-casted	1	Black painted
2	Head cover	Aluminum alloy	1	Black painted
3	Cylinder tube	Aluminum alloy	1	Hard anodized
4	Piston rod	Carbon steel	1	Hard chrome plating
5	Piston	Aluminum alloy	1	
6	Cushion ring A	Aluminum alloy	1	Anodized
7	Cushion ring B	Aluminum alloy	1	Anodized
8*	Bushing	Bearing alloy	1	
9	Cushion valve	Steel wire	2	Trivalent zinc chromated
10	Retaining ring	Spring steel	2	Phosphate coating
11	Tie-rod	Carbon steel	4	Trivalent zinc chromated
12	Tie-rod nut	Rolled steel	4	Trivalent black zinc chromated
13	Spring washer	Steel wire	8	Trivalent black zinc chromated
14	Pipe	Carbon steel tube	1	Trivalent zinc chromated
15	Sub-plate	Aluminum die-casted	1	Platinum silver
16*	Guide tube fitting	Aluminum die-casted	1	Platinum silver
17*	Valve port	Rolled steel	2	Electroless nickel plating
18*	Check spring	Spring steel	2	Trivalent zinc chromated

Note) Add "-X46" to the end of the part numbers for single solenoid type.

\* How to order solenoid valves/VS4□24-00 [Voltage] [Electrical entry]

\* Not replaceable.

No.	Description	Material	Qty	Note
19*	Check ball	Polyurethane rubber	2	Ball 9/32
20	Hex. socket head cap screw with SW	Chromium molybdenum steel	4	Trivalent zinc chromated
21	Needle guide	Carbon steel	2	Trivalent zinc chromated
22	Speed adjustment needle	Rolled steel	2	Electroless nickel plating
23	Lock nut	Carbon steel	2	Trivalent zinc chromated
24	Wear ring	Resin	1	
25	Rod seal	NBR	1	
26	Piston seal	NBR	1	
27*	Cushion seal	Urethane	2	
28	Cylinder tube gasket	NBR	2	
29*	Cushion valve seal	NBR	2	
30	Pipe gasket	NBR	2	
31	Gasket	NBR	1	
32	Speed adjustment needle seal	NBR	2	
33	Valve port gasket	NBR	4	
34	Magnet	—	(1)	
35	Rod end nut	Rolled steel	1	Trivalent zinc chromated
36	Solenoid valve	—	1	VS4124-00□-X46

### Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
40	CVS1N40-PS	Set of nos. above ⑫, ⑬, ⑭, ⑮, ⑯
50	CVS1N50-PS	
63	CVS1N63-PS	
80	CVS1N80-PS	
100	CVS1N100-PS	

\* Seal kit includes ⑫, ⑬, ⑭, ⑮, and ⑯. Order the seal kit based on each bore size. (The parts indicated with numbers ⑭ and ⑮ are not replaceable.)

\* Seal kit includes a grease pack (ø40, ø50: 10 g, ø63, ø80: 20 g, ø100: 30 g).

Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1


MVGQ

D-□

-X□

# CVS1 Series


## Basic Type: CVS1B

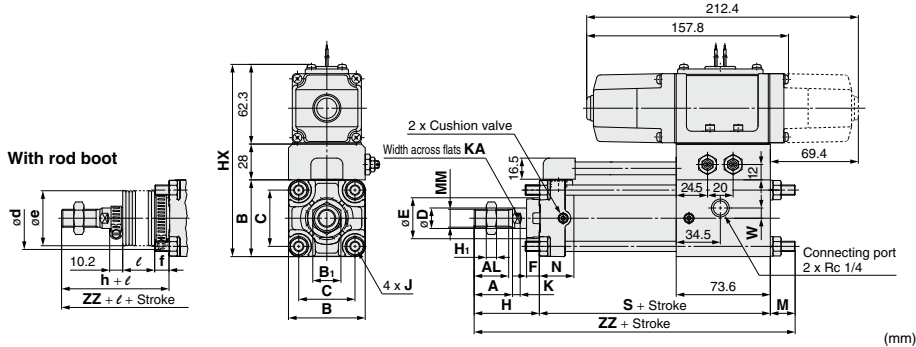

Bore size (mm)	Stroke* range (mm)	A	AL	B	B <sub>1</sub>	C	D	E	F	H <sub>1</sub>	HX	J	K	KA	M	MM	N	S
40	Up to 1000	30	27	60	22	44	16	32	10	8	150	M8 x 1.25	6	14	19.4	M14 x 1.5	27	130.6
50	Up to 1000	35	32	70	27	52	20	40	10	11	160	M8 x 1.25	7	18	16.4	M18 x 1.5	30	133.6
63	Up to 1000	35	32	85	27	64	20	40	10	11	175	M10 x 1.25	7	18	18.4	M18 x 1.5	31	140.6
80	Up to 1000	40	37	102	32	78	25	52	14	13	192	M12 x 1.75	10	22	21.4	M22 x 1.5	37	152.6
100	Up to 1000	40	37	116	41	92	30	52	14	16	206	M12 x 1.75	10	26	21.4	M26 x 1.5	40	159.6

Bore size (mm)	W	Without rod boot		With rod boot						* The minimum stroke of the one with rod boot is 20 mm or more.
		H	ZZ	d	e	f	h	ℓ	ZZ	
40	8	51	201	56	43	11.2	59	1/4 stroke	209	
50	8	58	208	64	52	11.2	66	1/4 stroke	216	
63	8	58	217	64	52	11.2	66	1/4 stroke	225	
80	0	71	245	76	65	12.5	80	1/4 stroke	254	
100	0	72	253	76	65	14	81	1/4 stroke	262	

## Axial Foot Type: CVS1L

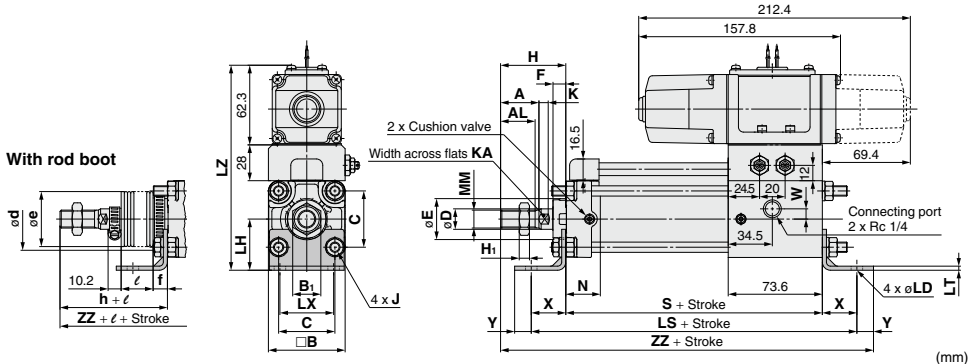


Bore size (mm)	Stroke* range (mm)	A	AL	B	B <sub>1</sub>	C	D	E	F	H <sub>1</sub>	J	K	KA	LD	LH	LS	LT	LX	LZ	MM
40	Up to 1000	30	27	60	22	44	16	32	10	8	M8 x 1.25	6	14	9	40	184.6	3.2	42	160	M14 x 1.5
50	Up to 1000	35	32	70	27	52	20	40	10	11	M8 x 1.25	7	18	9	45	187.6	3.2	50	170	M18 x 1.5
63	Up to 1000	35	32	85	27	64	20	40	10	11	M10 x 1.25	7	18	11.5	50	208.6	3.2	59	182	M18 x 1.5
80	Up to 1000	40	37	102	32	78	25	52	14	13	M12 x 1.75	10	22	13.5	65	240.6	4.5	76	206	M22 x 1.5
100	Up to 1000	40	37	116	41	92	30	52	14	16	M12 x 1.75	10	26	13.5	75	245.6	6	92	223	M26 x 1.5

Bore size (mm)	N	S	W	X	Y	Without rod boot		With rod boot					
						H	ZZ	d	e	f	h	ℓ	ZZ
40	27	130.6	8	27	13	51	221.6	56	43	11.2	59	1/4 stroke	229.6
50	30	133.6	8	27	13	58	231.6	64	52	11.2	66	1/4 stroke	239.6
63	31	140.6	8	34	16	58	248.6	64	52	11.2	66	1/4 stroke	256.6
80	37	152.6	0	44	16	71	283.6	76	65	12.5	80	1/4 stroke	292.6
100	40	159.6	0	43	17	72	291.6	76	65	14	81	1/4 stroke	300.6

\* The minimum stroke of the one with rod boot is 20 mm or more.  
\*\* Long stroke

**Rod Side Flange Type: CVS1F**

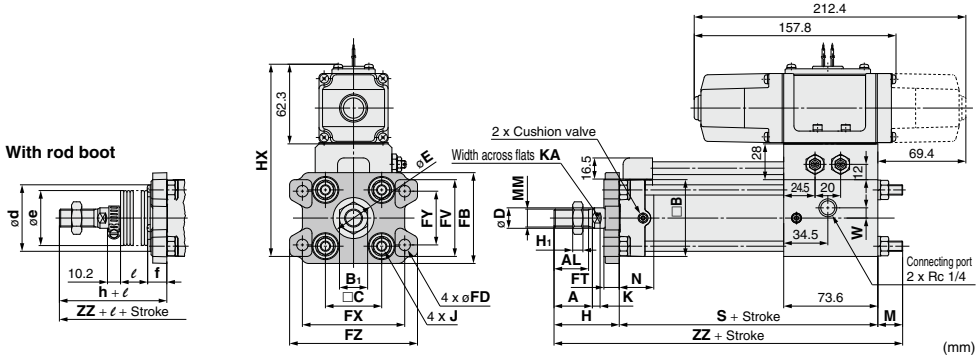

Bore size (mm)	Stroke* range (mm)	A	AL	B	B <sub>1</sub>	C	D	E	FB	FD	FT	FV	FX	FY	FZ	H <sub>i</sub>	HX	J	K	KA	M
40	Up to 1000	30	27	60	22	44	16	32	71	9	12	60	80	42	100	8	150	M8 x 1.25	6	14	19.4
50	Up to 1000	35	32	70	27	52	20	40	81	9	12	70	90	50	110	11	160	M8 x 1.25	7	18	16.4
63	Up to 1000	35	32	85	27	64	20	40	101	11.5	15	86	105	59	130	11	175	M10 x 1.25	7	18	18.4
80	Up to 1000	40	37	102	32	78	25	52	119	13.5	18	102	130	76	160	13	192	M12 x 1.75	10	22	21.4
100	Up to 1000	40	37	116	41	92	30	52	133	13.5	18	116	150	92	180	16	206	M12 x 1.75	10	26	21.4

Bore size (mm)	MM	N	S	W	Without rod boot				With rod boot					
					H	ZZ	d**	e	f	h	$\ell$	ZZ		
40	M14 x 1.5	27	130.6	8	51	201	52	43	15	59	1/4 stroke	209		
50	M18 x 1.5	30	133.6	8	58	208	58	52	15	66	1/4 stroke	216		
63	M18 x 1.5	31	140.6	8	58	217	58	52	17.5	66	1/4 stroke	225		
80	M22 x 1.5	37	152.6	0	71	245	80	65	21.5	80	1/4 stroke	254		
100	M26 x 1.5	40	159.6	0	72	253	80	65	21.5	81	1/4 stroke	262		

\* The minimum stroke of the one with rod boot is 20 mm or more.  
\*\* Long stroke  
\*\*\* Machine larger holes than the outside diameter  $\phi$ d of the mounting bracket for rod boot when mounting the rod boot part to the through for mounting.

CVQ

CVQM

CVJ


CVM

CV3

CVS1

MVGQ

**Head Side Flange Type: CVS1G**

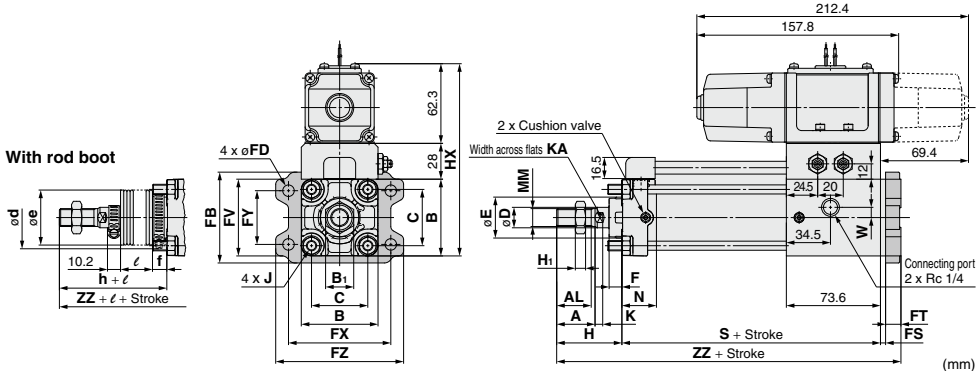

Bore size (mm)	Stroke* range (mm)	A	AL	B	B <sub>1</sub>	C	D	E	F	FB	FD	FT	FV	FX	FY	FZ	H <sub>i</sub>	HX	J	K
40	Up to 1000	30	27	60	22	44	16	32	10	71	9	12	60	80	42	100	8	150	M8 x 1.25	6
50	Up to 1000	35	32	70	27	52	20	40	10	81	9	12	70	90	50	110	11	160	M8 x 1.25	7
63	Up to 1000	35	32	85	27	64	20	40	10	101	11.5	15	86	105	59	130	11	175	M10 x 1.25	7
80	Up to 1000	40	37	102	32	78	25	52	14	119	13.5	18	102	130	76	160	13	192	M12 x 1.75	10
100	Up to 1000	40	37	116	41	92	30	52	14	133	13.5	18	116	150	92	180	16	206	M12 x 1.75	10

Bore size (mm)	KA	MM	N	S	W	Without rod boot				With rod boot					
						H	ZZ	d	e	f	h	$\ell$	ZZ		
40	14	M14 x 1.5	27	130.6	8	51	197.6	56	43	11.2	59	1/4 stroke	205.6		
50	18	M18 x 1.5	30	133.6	8	58	207.6	64	52	11.2	66	1/4 stroke	215.6		
63	18	M18 x 1.5	31	140.6	8	58	213.6	64	52	11.2	66	1/4 stroke	221.6		
80	22	M22 x 1.5	37	152.6	0	71	241.6	76	65	12.5	80	1/4 stroke	250.6		
100	26	M26 x 1.5	40	159.6	0	72	249.6	76	65	14	81	1/4 stroke	258.6		


\* The minimum stroke of the one with rod boot is 20 mm or more.

D-

X-

# CVS1 Series

## Single Clevis Type: CVS1C

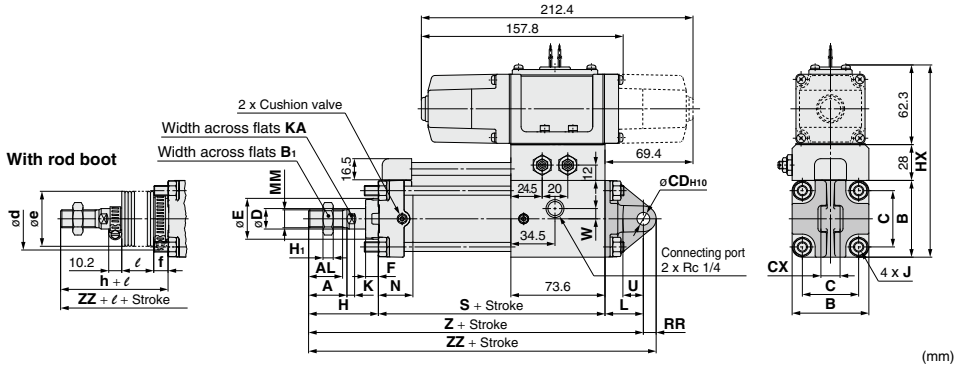


Bore size (mm)	Stroke* range (mm)	A	AL	B	B <sub>1</sub>	C	CD <sub>H10</sub>	CX	D	E	F	H <sub>1</sub>	HX	J	K	KA	L	MM
		40	Up to 1000	30	27	60	22	44	10 <sup>+0.058</sup> <sub>-0.03</sub>	15 <sup>-0.1</sup> <sub>-0.3</sub>	16	32	10	8	150	M8 x 1.25	6	14
50	Up to 1000	35	32	70	27	52	12 <sup>+0.070</sup> <sub>-0.04</sub>	18 <sup>-0.1</sup> <sub>-0.3</sub>	20	40	10	11	160	M8 x 1.25	7	18	35	M18 x 1.5
63	Up to 1000	35	32	85	27	64	16 <sup>+0.070</sup> <sub>-0.04</sub>	25 <sup>-0.1</sup> <sub>-0.3</sub>	20	40	10	11	175	M10 x 1.25	7	18	40	M18 x 1.5
80	Up to 1000	40	37	102	32	78	20 <sup>+0.084</sup> <sub>-0.04</sub>	31.5 <sup>-0.1</sup> <sub>-0.3</sub>	25	52	14	13	192	M12 x 1.75	10	22	48	M22 x 1.5
100	Up to 1000	40	37	116	41	92	25 <sup>+0.084</sup> <sub>-0.04</sub>	35.5 <sup>-0.1</sup> <sub>-0.3</sub>	30	52	14	16	206	M12 x 1.75	10	26	58	M26 x 1.5

Bore size (mm)	N	RR	S	U	W	Without rod boot			With rod boot						
						H	Z	ZZ	d	e	f	h	ℓ	Z	ZZ
40	27	10	130.6	16	8	51	211.6	221.6	56	43	11.2	59	1/4 stroke	219.6	229.6
50	30	12	133.6	19	8	58	266.6	238.6	64	52	11.2	66	1/4 stroke	234.6	246.6
63	31	16	140.6	23	8	58	238.6	254.6	64	52	11.2	66	1/4 stroke	246.6	262.6
80	37	20	152.6	28	0	71	271.6	291.6	76	65	12.5	80	1/4 stroke	280.6	300.6
100	40	25	159.6	36	0	72	289.6	314.6	76	65	14	81	1/4 stroke	298.6	323.6

\* The minimum stroke of the one with rod boot is 20 mm or more.

## Double Clevis Type: CVS1D

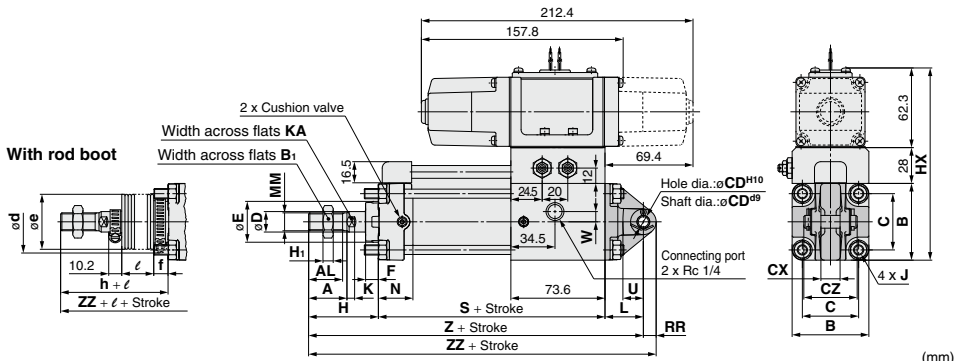

Bore size (mm)	Stroke* range (mm)	A	AL	B	B <sub>1</sub>	C	CD <sub>H10</sub>	CX	CZ	D	E	F	H <sub>1</sub>	HX	J	K	KA	L
		40	Up to 1000	30	27	60	22	44	10 <sup>+0.058</sup> <sub>-0.03</sub>	15 <sup>+0.3</sup> <sub>-0.1</sub>	29.5	16	32	10	8	150	M8 x 1.25	6
50	Up to 1000	35	32	70	27	52	12 <sup>+0.070</sup> <sub>-0.04</sub>	18 <sup>+0.3</sup> <sub>-0.1</sub>	38	20	40	10	11	160	M8 x 1.25	7	18	35
63	Up to 1000	35	32	85	27	64	16 <sup>+0.070</sup> <sub>-0.04</sub>	25 <sup>+0.3</sup> <sub>-0.1</sub>	49	20	40	10	11	175	M10 x 1.25	7	18	40
80	Up to 1000	40	37	102	32	78	20 <sup>+0.084</sup> <sub>-0.04</sub>	31.5 <sup>+0.3</sup> <sub>-0.1</sub>	61	25	52	14	13	192	M12 x 1.75	10	22	48
100	Up to 1000	40	37	116	41	92	25 <sup>+0.084</sup> <sub>-0.04</sub>	35.5 <sup>+0.3</sup> <sub>-0.1</sub>	64	30	52	14	16	206	M12 x 1.75	10	26	58

Bore size (mm)	MM	N	RR	S	U	W	Without rod boot			With rod boot						
							H	Z	ZZ	d	e	f	h	ℓ	Z	ZZ
40	M14 x 1.5	27	10	130.6	16	8	51	211.6	221.6	56	43	11.2	59	1/4 stroke	219.5	229.6
50	M18 x 1.5	30	12	133.6	19	8	58	226.6	238.6	64	52	11.2	66	1/4 stroke	234.6	246.6
63	M18 x 1.5	31	16	140.6	23	8	58	238.6	254.6	64	52	11.2	66	1/4 stroke	246.6	262.6
80	M22 x 1.5	37	20	152.6	28	0	71	271.6	291.6	76	65	12.5	80	1/4 stroke	280.6	300.6
100	M26 x 1.5	40	25	159.6	36	0	72	289.6	314.6	76	65	14	81	1/4 stroke	298.6	323.6

\* The minimum stroke of the one with rod boot is 20 mm or more.

\* Clevis pin, flat washer and cotter pin are shipped together.







# CVS1 Series

## Specific Product Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and pages 3 to 12 for Actuator and Auto Switch Precautions.

### Selection

#### ⚠ Warning

##### 1. Confirm the specifications.

Products in this catalog are designed to be used for compressed air systems. If not operated within the designated pressure or temperature, it may damage the products or cause malfunction. (Refer to specifications.)

##### 2. Energizing continuously for a long period of time

When the valve is continuously energized for a long period of time, the performance may deteriorate or effect peripheral equipment adversely since temperature rises when coils generate heat.

##### 3. Mounting orientation

Metal seal: For single solenoids, mounting orientation is flexible. For double solenoids and 3 position valves, mount a spool valve horizontally.

### Handling

#### ⚠ Warning

##### 1. Do not open the cushion valve beyond the stopper.

A retaining ring is installed as a cushion valve retention mechanism. Do not open the cushion valve beyond it. If not operated in accordance with the above precautions, the cushion valve may be ejected from the cover when air pressure is supplied.

Bore size (mm)	Width across flats	Socket wrench
40, 50	2.5	JIS 4648 Hexagonal wrench key 2.5
63, 80, 100	4	JIS 4648 Hexagonal wrench key 4

##### 2. Use the air cushion at the end of cylinder stroke.

Otherwise, the tie-rod or piston rod assembly will be damaged.

### Handling


#### ⚠ Caution

##### 1. Do not use a pneumatic type as an air-hydro cylinder. It can cause oil leak.

##### 2. Do not rotate the piston rod when the rod boot is fixed.

Before rotating the piston rod, loosen the band to avoid twisting the rod boot.

##### 3. Install the rod boot with the breathing hole facing downwards or in a direction suitable to prevent dust, moisture etc. from entering easily into the rod boot.



### Disassembly/Replacement

#### ⚠ Caution

##### 1. Use a socket wrench when the bracket is replaced.

If other tools are used, the nut or other parts may be deformed or the work efficiency may decrease. For applicable sockets, refer to the table below.

Bore size (mm)	Nut	Width across flats	Socket	Tightening torque (N·m)
40, 50	DA00040	13	JIS B4636	7.4
	(M8 x 1.25, Hexagon nut 3 types)		+ Two-angle socket 13	
63	DA00010	17	JIS B4636	20
	(M10 x 1.25, Hexagon nut 3 types)		+ Two-angle socket 17	
80, 100	DA00131	19	JIS B4636	29
	(M12 x 1.75, Hexagon nut 3 types)		+ Two-angle socket 19	

##### 2. Do not replace the bushing.

As the bushing is press-fit, replace the cover assembly when the bushing must be replaced.

##### 3. When a seal is replaced, apply grease to the new seal before it is assembled.

Operation of the cylinder without greasing will result in extreme abrasion of the seal, causing premature air leakage.

##### 4. Do not disassemble the trunnion type cylinder because the mounting precision is required.

It is difficult to align the axial center of the trunnion with the axial center of the cylinder. Thus, if this type of cylinder is disassembled and reassembled, the required dimensional accuracy cannot be attained, which may lead to malfunctions.

CVQ

CVQM

CVJ

CVM

CV3

CVS1

MVGQ

D-

-X






### Speed controller installed

Operation type can be changed to rod extended when energized or rod retracted when energized.


A selection of solenoid valves is possible.

Single, double and 3 position solenoid valves are mountable.



#### Symbol

Air cushion



### Made to Order Specifications

[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC7	Tie-rod, cushion valve, and tie-rod nut made of stainless steel
-XC14	Change of trunnion bracket mounting position
-XC15	Change of tie-rod length
-XC27	Double clevis and double knuckle joint pins made of stainless steel
-XC28	Compact flange made of SS400

Refer to pages 844 to 849 for cylinders with auto switches.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Auto switch mounting bracket: Part no.

### Specifications

Bore size (mm)	40	50	63
Type	Non-lube		
Action	Double acting		
Fluid	Air		
Proof pressure	1.5 MPa		
Maximum operating pressure	1.0 MPa		
Minimum operating pressure	0.05 MPa		
Ambient and fluid temperature	-10 to 60°C (No freezing)		
Cushion	Air cushion		
Stroke length tolerance	Up to 250 st $^{+1.0}_0$ , 251 to 600 st $^{+1.4}_0$		
Port size	Rc 1/4		
Lubrication	Not required (Non-lube)		
Electrical entry	Grommet, Conduit terminal, DIN terminal, DIN terminal with indicator light, Conduit terminal with surge voltage suppressor		
Rod non-rotating accuracy	±0.8°		
Allowable rotational torque	0.44 N·m or less		
Piston speed	50 to 500 mm/s* (Note)		
Allowable kinetic energy	2.4 J	4.4 J	7.8 J
Mounting type	Basic type, Axial foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Center trunnion type		

\* Operate within the range of absorbed energy.

Note) Refer to page 842 for operating piston speed for each size.

### Solenoid Valve Specifications

Applicable solenoid valve model	VS4□24			
Coil rated voltage	100/200 VAC (50/60 Hz), 24 VDC			
Effective area of valve (Cv factor)	Single 26.5 mm <sup>2</sup> (1.47)			
Allowable voltage	-15 to 10% of the rated voltage			
Coil insulation	Class B or equivalent (130°C)			
Apparent power (Note)	AC	Inrush	50 Hz	100 VA
			60 Hz	90 VA
		Holding	50 Hz	20 VA
			60 Hz	14 VA
Power consumption (Note)	DC	13.2 W		

Note) At the rated voltage.

### Standard Stroke

Bore size (mm)	Standard stroke (mm)
40	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500*
50, 63	25, 50, 75, 100, 125, 150, 200, 250, 300, 350, 400, 450, 500, 600*

Please consult with SMC for longer strokes than the strokes marked with \*.

### Rod Boot Material

Symbol	Rod boot material	Max. ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C*

\* Maximum ambient temperature for the rod boot itself.

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1


MVGQ

D-□

-X□

# CVS1K Series

## Opening Range of Throttle Valve and Piston Speed



Conditions: Operating pressure 0.5 MPa, Horizontal mounting,  
No load, Spring return side

• The actuating speeds above are for reference.

## Accessory

	Mounting	Basic type	Foot type	Rod side flange type	Head side flange type	Single clevis type	Double clevis type	Center trunnion type
Standard equipment	Rod end nut	●	●	●	●	●	●	●
	Clevis pin	—	—	—	—	—	●	—
Option	Single knuckle joint	●	●	●	●	●	●	●
	Double knuckle joint* (With pin)	●	●	●	●	●	●	●
	With rod boot	●	●	●	●	●	●	●

\* Pin, plain washer and cotter pin are shipped together with double clevis and double knuckle joint.

\* Refer to page 839 for dimensions and part numbers of the option. Refer to page 843 for dimensions of the rod boot.

## Handling

1. Adjusting of the piston speed
2. Interchange between the spring return type and the spring extend type

### 3. Manual override

Since the operations above 1. to 3. are the same as the CVS1 series, refer to page 834.

## Weight

(kg)

Bore size (mm)		40	50	63
Basic weight	Basic type	2.48	3.04	4.12
	Foot type	2.65	3.24	4.41
	Rod side flange type	2.88	3.64	5.08
	Head side flange type	2.98	3.78	5.08
	Single clevis type	2.74	3.48	4.87
	Double clevis type	2.73	3.46	4.89
	Trunnion type	3.08	3.78	5.46
Additional weight per each 50 mm of stroke		0.22	0.28	0.37
Accessory bracket	Single knuckle	0.23	0.26	0.26
	Double knuckle (With pin)	0.37	0.43	0.43

Calculation: (Example) CVS1KL40-100-1

- Standard weight.....2.65 (kg)
- Premium weight.....0.22 (kg/50 st)
- Cylinder stroke.....100 (st)  $2.65 + 0.22 \times 100 \div 50 = 3.09$  kg
- \* Add 0.34 kg for the double solenoid type.


## ⚠ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and pages 722 to 724 for Common Precautions.

### Operating Precautions

#### ⚠ Caution

1. Avoid using the air cylinder in such a way that rotational torque would be applied to the piston rod.
  - If rotational torque is applied, the non-rotating guide will become deformed, causing a loss of non-rotating accuracy. Also, to screw a bracket or a nut onto the threaded portion at the end of the piston rod, make sure the retract the piston rod entirely, and place a wrench on the parallel sections of the rod that protrudes. To tighten, take precautions to prevent the tightening torque from being applied to the non-rotating guide.



### Disassembly/Replacement

#### ⚠ Caution

1. When replacing rod seals, please contact SMC.
 

Air leakage may be happened, depending on the position in which a rod seal is fitted. Thus, please contact SMC when replacing them.
2. Do not replace the non-rotating guide.
 

Since the non-rotating guide is press fitted, the entire cover assembly needs to be replaced instead of a single part.

### Selection

#### ⚠ Warning




1. Confirm the specifications.
 

Products in this catalog are designed to be used for compressed air systems. If not operated within the designated pressure or temperature, it may damage the products or cause malfunction. (Refer to specifications.)
2. Energizing continuously for a long period of time
  - When the valve is continuously energized for a long period of time, the performance may deteriorate or effect peripheral equipment adversely since temperature rises when coils generate heat.
3. Mounting orientation
 

Metal seal: For single solenoids, mounting orientation is flexible. For double solenoids and 3 position valves, mount a spool valve horizontally.

## Construction

### Lube type

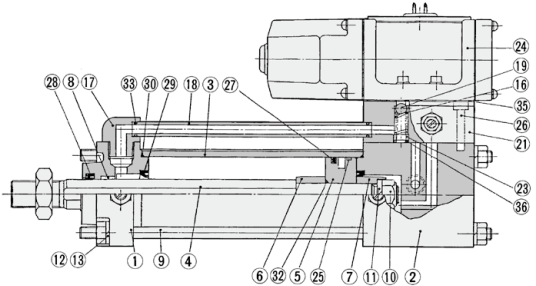

### Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Matt black painted
2	Head cover	Aluminum alloy	Matt black painted
3	Cylinder tube	Aluminum alloy	Hard anodized
4	Piston rod	Carbon steel	Hard chrome plated
5	Piston	Aluminum alloy	Chromated
6	Cushion ring A	Rolled steel	Zinc chromated
7	Cushion ring B	Rolled steel	Zinc chromated
8*	Non-rotating guide	Oil impregnated sintered alloy	
9	Tie-rod	Carbon steel	Zinc chromated
10	Piston nut	Rolled steel	Zinc chromated
11	Spring washer	Steel wire	Zinc chromated
12	Tie-rod nut	Carbon steel	Black zinc chromated
13	Spring washer	Steel wire	Black zinc chromated
14	Needle guide	Carbon steel	Electroless nickel plated
15	Speed adjustment needle	Carbon steel	Electroless nickel plated
16*	Check spring	Steel wire	Zinc chromated
17*	Guide tube fitting	Aluminum alloy	Platinum silver
18	Pipe	Carbon steel tube	Chromated

\* Not replaceable

No.	Description	Material	Note
19	Check ball	Polyurethane rubber	9/32
20	Lock nut	Carbon steel	Nickel plated
21	Sub-plate	Aluminum alloy	Platinum silver
22	Cushion valve	Rolled steel	Electroless nickel plated
23*	Valve port	Brass	
24	Solenoid valve	—	Refer to the note below.*
25	Wear ring	Resin	
26	Hexagon socket head cap screw	Chromium molybdenum steel	Black zinc chromated

(Note) Add "X46" at the end of the part number for single solenoid type.

\* How to order solenoid valves

VS4□24- [Voltage] [Electrical entry]

No.	Description	Material	Note
27	Piston seal	NBR	
28	Rod seal	NBR	
29*	Cushion seal	NBR	
30	Cylinder tube gasket	NBR	

No.	Description	Material	Note
31	Cushion valve seal	NBR	
32*	Piston gasket	NBR	
33	Pipe gasket	NBR	
34	Speed adjustment valve seal	NBR	
35	Gasket	NBR	
36	Valve port gasket	NBR	

### Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
40	CVS1K40-PS	Set of nos. above
50	CVS1K50-PS	②⑦, ②⑧, ③①, ③①, ③③, ③③
63	CVS1K63-PS	③③, ③③


\* Seal kit includes ②⑦, ②⑧, ③①, ③③, ③③, ③③. Order the seal kit, based on each bore size.

\* Seal kit includes a grease pack (ø40, ø50: 10 g, ø63 or more: 20 g).

Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

### Basic Type: CVS1K

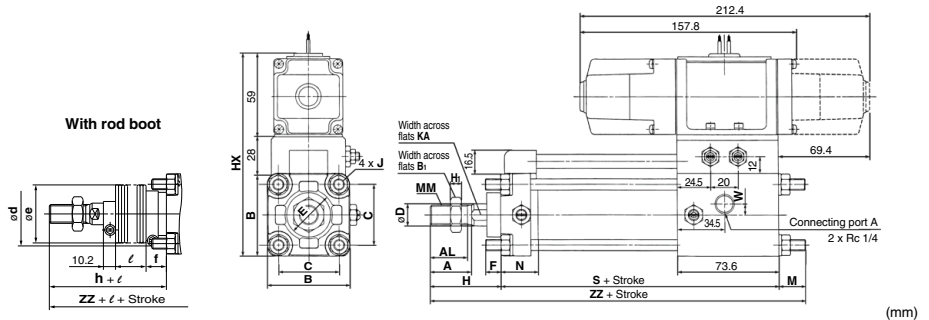

Bore size (mm)	Stroke range (mm)*	A	AL	B	B <sub>1</sub>	C	D	E	F	H <sub>1</sub>	HX	J	KA	M	MM	N	S	W
40	to 500	30	27	60	22	44	16	32	10	8	147	M8 x 1.25	14	19.4	M14 x 1.5	27	130.6	8
50	to 600	35	32	70	27	52	20	40	10	11	157	M8 x 1.25	18	16.4	M18 x 1.5	30	133.6	8
63	to 600	35	32	86	27	64	20	40	10	11	173	M10 x 1.25	18	18.4	M18 x 1.5	31	140.6	8

Bore size (mm)	Without rod boot		With rod boot					
	H	ZZ	d	e	f	h	ℓ	ZZ
40	51	201	56	43	11.2	59	1/4 stroke	209
50	58	208	64	52	11.2	66	1/4 stroke	216
63	58	217	64	52	11.2	66	1/4 stroke	225

\* The minimum stroke of the one with rod boot is 20 mm or more.

• External dimensions of each mounting bracket other than basic type are the same, except KA dimension. Refer to pages 836 to 839.


• For accessory, refer to page 839.

# Auto Switch Mounting


## Auto Switch Proper Mounting Position (Detection at Stroke End) and Mounting Height

<Tie-rod mounting type>


- D-M9□/M9□V                    D-Z7□/Z80
- D-M9□W/M9□WV                D-Y59□/Y69□/Y7P/Y7PV
- D-M9□A/M9□AV                 D-Y7□W/Y7□WV
- D-A9□/A9□V

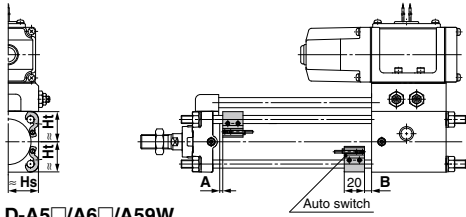


D-A5□/A6□/A59W

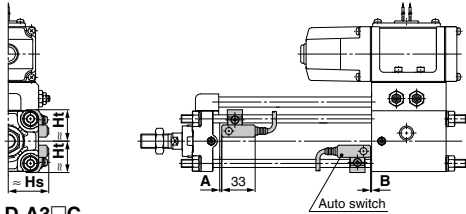


D-A3□C  
D-G39C/K39C

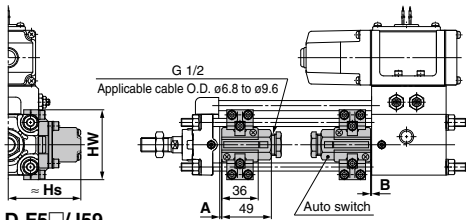

D-F5□/J59  
D-F5NT  
D-F5□W/J59W/F59F

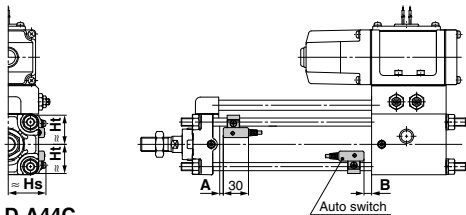


D-A44C

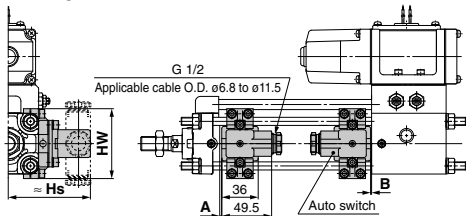


<Band mounting type>


- D-B5□/B64/B59W

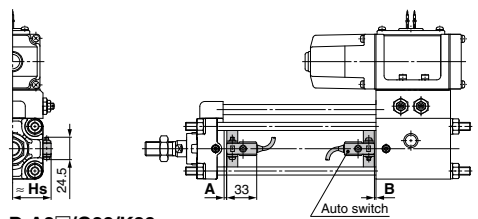


D-A3□/G39/K39

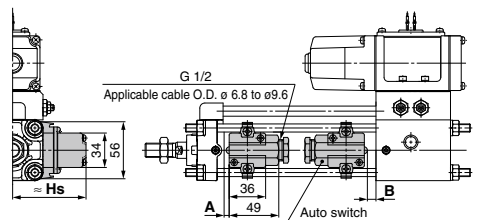

D-G5□/K59/G5□W/K59W  
D-G59F/G5NT

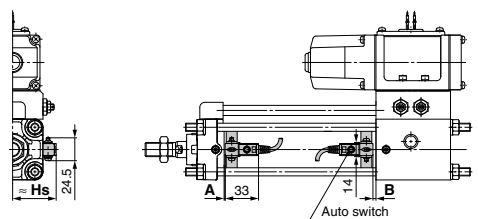

D-A44

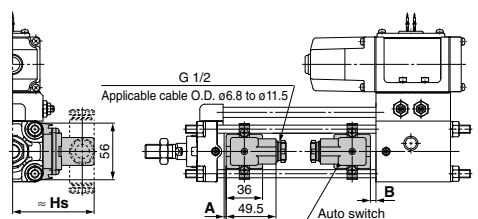

**Auto Switch Proper Mounting position (Detection at Stroke End) and Mounting Height**

**Auto Switch Proper Mounting Position (Standard type)** (mm)

Auto switch model	D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□A D-M9□AV		D-A9□ D-A9□V		D-Y59□ D-Y69□ D-Y7P D-Y7PV D-Y7□W D-Y7□WV D-Y7BA D-Z7□ D-Z80 D-B59W		D-F5□ D-J59 D-F59F D-F5□W D-J59W D-F5BA		D-F5NT		D-A59W		D-G39 D-G39C D-K39 D-K39C D-A5□ D-A6□ D-A3□ D-A3□C D-A44 D-A44C		D-G5□ D-G5NT D-G5□W D-K59 D-K59C D-G59F D-F5BA D-F5NT		D-B5□ D-B64			
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
40	9	9	5	5	2.5	2.5	5.5	5.5	10.5	10.5	3	3	0	0	1	1	0	0		
50	9.5	8.5	5.5	4.5	3	2	6	5	11	10	3.5	2.5	0	0	1.5	0.5	0	0		
63	12.5	11.5	8.5	7.5	6	5	9	8	14	13	6.5	5.5	2.5	1.5	4.5	3.5	3	2		
80	16.5	13.5	12.5	9.5	10	7	13	10	18	15	10.5	7.5	6.5	3.5	8.5	5.5	7	4		
100	18	16	14	12	11.5	9.5	14.5	12.5	19.5	17.5	12	10	8	6	10	8	8.5	6.5		

Note 1) D-B5□ type, D-G5□ type, D-K5□ type are mountable only upon a receipt of order. (Not mountable after the time of shipment)  
 Note 2) Adjust the auto switch after confirming the operating conditions in the actual setting.

**Auto Switch Mounting Height (Standard type)** (mm)

Auto switch model	D-M9□ D-M9□W D-M9□A D-A9□		D-M9□V D-M9□WV D-M9□AV		D-A9□V		D-Y59□ D-Y7P D-Y7BA D-Y7□W D-Z7□ D-Z80		D-Y69□ D-Y7PV D-Y7□WV		D-G5□ D-K59 D-G5NT D-G5□W D-K59W D-G5BA D-G59F D-B5□ D-B64 D-B59W		D-G39 D-K39 D-A3□		D-A44		D-F5□ D-J59 D-F5□W D-J59W D-F5BA D-F59F D-F5NT		D-A5□ D-A6□ D-A59W		D-G39C D-K39C D-A3□C		D-A44C	
	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht
40	30	30	34	30	31	30	30	30	30	30	37	71.5	81.5	38	31.5	38.5	31.5	73	69	81	69			
50	34	34	38	34	35	34	34	34	34	34	42	76.5	86.5	42	35.5	42	35.5	78.5	77	86.5	77			
63	41	41	44	41	41.5	41	41	41	41	41	49	83.5	93.5	47	43	46.5	43	85.5	91	93.5	91			
80	49.5	49	52.5	49	50	49	49.5	49	49.5	49	57.5	92	102	53.5	51	53.5	51	94	107	102	107			
100	56.5	56	61	56	58.5	56	56.5	55.5	57.5	55.5	68	102.5	112.5	61	57.5	61.5	57.5	104	121	112	121			

**Auto Switch Proper Mounting Position (Non-rotating rod type)** (mm)

Auto switch model	D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□A D-M9□AV		D-A9□ D-A9□V		D-A5□ D-A6□ D-A3□ D-A3□C D-A44/A44C D-G39/G39C D-K39/K39C		D-B5□ D-B64		D-F5□ D-J59 D-F5□W D-J59W D-F59F		D-G5□W D-K59W D-G59F D-G5□ D-K59 D-G5NT		D-A59W		D-A44FNT		D-B59W D-Z80 D-Y59□ D-Y69□ D-Y7P D-Y7PV D-Y7□W D-Y7□WV	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
40	10	8	6	4	0	0	0.5	0	6.5	4.5	2	0	4	2	11.5	9.5	3.5	1.5
50	10	8	—	—	0	0	0.5	0	6.5	4.5	2	0	4	2	11.5	9.5	3.5	1.5
63	12.5	11.5	8.5	7.5	2.5	1.5	3	2	9	8	4.5	3.5	6.5	5.5	14	13	6	5
80	16	14	12	10	6	4	6.5	4.5	12.5	10.5	8	6	10	8	17.5	15.5	9.5	7.5
100	17.5	16.5	13.5	12.5	7.5	6.5	8	7	14	13	9.5	8.5	11.5	10.5	19	18	11	10

Note 1) D-B5□ type, D-G5□ type, D-K5□ type are mountable only upon a receipt of order. (Not mountable after the time of shipment)  
 Note 2) D-A9□ and D-A9□V types cannot be mounted on ø50.  
 Note 3) Adjust the auto switch after confirming the operating conditions in the actual setting.

**Auto Switch Mounting Height (Non-rotating rod type)** (mm)

Auto switch model	D-M9□ D-M9□W D-M9□A D-A9□		D-M9□V D-M9□WV D-M9□AV		D-A9□V		D-B5□ D-B64 D-B59W D-G5□ D-K59 D-G5NT D-G5□W D-K59W D-G59F		D-A3□ D-G39 D-K39		D-A44		D-A5□ D-A6□ D-A59W		D-A3□C D-G39C D-K39C		D-A44C		D-Z7□ D-Z80 D-Y59□ D-Y7P D-Y7□W		D-Y69□ D-Y7PV D-Y7□WV	
	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht
40	30	30	35	30	32	30	38	72.5	80.5	40	31	38.5	31	73	69	81	69	30	30	30.5	30	
50	34	34	39	34	—	—	43.5	78	86	43.5	35	42.5	35	78.5	77	86.5	77	34	34	35	34	
63	41	41	46	41	43.5	41	50.5	85	93	49	42	48	42	85.5	91	93.5	91	41	41	42.5	41	
80	49.5	49	54	49	51.5	49	59	93.5	101.5	55.5	50	54	50	94	107	102	107	49.5	48.5	51	48.5	
100	57	56	62.5	56	59.5	56	69.5	104	112	63	57.5	62	57.5	104	121	112	121	59.5	56	59	56	

\* D-A9□ and D-A9□V types cannot be mounted on ø50.

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

-X□

## Minimum Stroke for Auto Switch Mounting (Standard Type)

		n: Number of auto switches (mm)					
Auto switch model	Number of auto switches	Brackets other than center trunnion	Center trunnion				
			ø40	ø50	ø63	ø80	ø100
D-M9□ D-M9□W	2 (Different surfaces and same surface) 1	15	80		85	90	95
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)		$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$95 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)
D-M9□V D-M9□WV	2 (Different surfaces and same surface) 1	10	55		60	65	70
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$55 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)		$60 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$70 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)
D-M9□A	2 (Different surfaces and same surface) 1	15	80		85	95	100
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)		$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$95 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$100 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)
D-M9□AV	2 (Different surfaces and same surface) 1	10	60		65	70	75
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$60 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)		$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$70 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$75 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)
D-A9□	2 (Different surfaces and same surface) 1	15	75		80	85	90
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$75 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)		$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)
D-A9□V	2 (Different surfaces and same surface) 1	10	50		55	60	65
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$50 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)		$55 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$60 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)
D-F5□/J59 D-F5□W/J59W D-F5BA/F59F D-A5□/A6	2 (Different surfaces and same surface) 1	15	90		100	110	120
	n (Same surface)	$15 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$90 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)		$100 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)
D-F5NT	2 (Different surfaces and same surface) 1	25	110		120	130	140
	n (Same surface)	$25 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)		$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$130 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$140 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)
D-A59W	2 (Different surfaces and same surface) 1	20	90		100	110	120
	n (Same surface)	$20 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$90 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)		$100 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)
	1	15	90		100	110	120
D-G5□/K59 D-G5□W D-K59W D-G5BA D-G59F D-G5NT D-B5□/B64	2 Different surfaces	15	90	100	110		
	Same surface	75					
	n	Different surfaces	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$90 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$100 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$110 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	
		Same surface	$75 + 50 (n-2)$ (n = 2, 3, 4...)	$90 + 50 (n-2)$ (n = 2, 4, 6, 8... Note 1)	$100 + 50 (n-2)$ (n = 2, 4, 6, 8... Note 1)	$110 + 50 (n-2)$ (n = 2, 4, 6, 8... Note 1)	
			1	10	90	100	110
D-B59W	2 Different surfaces	20	90	100	110		
	Same surface	75					
	n	Different surfaces	$20 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8... Note 1)	$90 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$100 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	$110 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16... Note 2)	
		Same surface	$75 + 50 (n-2)$ (n = 2, 3, 4...)	$90 + 50 (n-2)$ (n = 2, 4, 6, 8... Note 1)	$100 + 50 (n-2)$ (n = 2, 4, 6, 8... Note 1)	$110 + 50 (n-2)$ (n = 2, 4, 6, 8... Note 1)	
1	15	90	100	110			

Note 1) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.

Note 2) When "n" is an odd number, a multiple of 4 that is larger than this odd number is used for the calculation.

**Minimum Stroke for Auto Switch Mounting (Standard Type)**

n: Number of auto switches (mm)

Auto switch model	Number of auto switches	Brackets other than center trunnion	Center trunnion				
			ø40	ø50	ø63	ø80	ø100
D-G39 D-K39 D-A3□	2	Different surfaces	35	75	80	90	
		Same surface	100	100	100	100	
	n	Different surfaces	$35 + 30(n - 2)$ (n = 2, 3, 4...)	$75 + 30(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$80 + 30(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$90 + 30(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
		Same surface	$100 + 100(n - 2)$ (n = 2, 3, 4...)		$100 + 100(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>		
	1	10	75	80	90		
D-A44	2	Different surfaces	35	75	80	90	
		Same surface	55				
	n	Different surfaces	$35 + 30(n - 2)$ (n = 2, 3, 4...)	$75 + 30(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$80 + 30(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$90 + 30(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
		Same surface	$55 + 50(n - 2)$ (n = 2, 3, 4...)	$75 + 50(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$80 + 50(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$90 + 50(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
	1	10	75	80	90		
D-G39C D-K39C D-A3□C	2	Different surfaces	20	75	80	90	
		Same surface	100	100	100	100	
	n	Different surfaces	$20 + 35(n - 2)$ (n = 2, 3, 4...)	$75 + 35(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$80 + 35(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$90 + 35(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
		Same surface	$100 + 100(n - 2)$ (n = 2, 3, 4, 5...)		$100 + 100(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>		
	1	10	75	80	90		
D-A44C	2	Different surfaces	20	75	80	90	
		Same surface	55				
	n	Different surfaces	$20 + 35(n - 2)$ (n = 2, 3, 4...)	$75 + 35(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$80 + 35(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$90 + 35(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
		Same surface	$55 + 50(n - 2)$ (n = 2, 3, 4...)	$75 + 50(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$80 + 50(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$90 + 50(n - 2)$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	
	1	10	75	80	90		
D-Y59□/Y7P D-Y7□W D-Z7□/Z80	2 (Different surfaces and same surface) 1	15	80	85	90	95	105
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$95 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>
D-Y69□/Y7PV D-Y7□WV	2 (Different surfaces and same surface) 1	10	65	75	80	90	
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$75 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	
D-Y7BA	2 (Different surfaces and same surface) 1	20	95	100	105	110	
	n	$20 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1)</sup>	$95 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$100 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$105 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	$110 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2)</sup>	

Note 1) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.  
 Note 2) When "n" is an odd number, a multiple of 4 that is larger than this odd number is used for the calculation.

CVQ  
 CVQM  
 CVJ□  
 CVM□  
 CV3  
 CVS1  
 MVGQ

D-□  
 -X□



## Minimum Stroke For Auto Switch Mounting (Non-rotating Rod Type)

n: Number of auto switches (mm)

Auto switch model	No. of auto switches mounted	Mounting brackets other than center trunnion	Center trunnion				
			ø40	ø50	ø63	ø80	ø100
D-M9□ D-M9□W	2 (Different surfaces, Same surface), 1	15	80		85	90	95
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1</sup>	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>		$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$95 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>
D-M9□A	2 (Different surfaces, Same surface), 1	15	85		90	95	105
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1</sup>	$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>		$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$95 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>
D-M9□V D-M9□WV	2 (Different surfaces, Same surface), 1	10	55		60	65	70
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1</sup>	$55 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>		$60 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$70 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>
D-M9□AV	2 (Different surfaces, Same surface), 1	10	60		65	75	80
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1</sup>	$60 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>		$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$75 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>
D-A9□	2 (Different surfaces, Same surface), 1	15	75	—	80	85	90
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1</sup>	$75 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	—	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>
D-A9□V	2 (Different surfaces, Same surface), 1	10	50	—	55	60	65
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1</sup>	$50 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	—	$55 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$60 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>
D-A5□/A6□ D-F5□/J59 D-F5□W/J59W D-F59F	2 (Different surfaces, Same surface), 1	15	90		100	110	120
	n (Same surface)	$15 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1</sup>	$90 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>		$100 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>
D-A59W	2 (Different surfaces, Same surface)	20	90		100	110	120
	n (Same surface)	$20 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1</sup>	$90 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>		$100 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>
	1	15	90		100	110	120
D-F5NT	2 (Different surfaces, Same surface), 1	25	110		120	130	140
	n (Same surface)	$25 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...) <sup>Note 1</sup>	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>		$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$130 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>	$140 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...) <sup>Note 2</sup>
D-B5□/B64 D-G5□/K59 D-G5□W D-K59W D-G59F D-G5NT	2 Different surfaces	15	90		100	110	
	Same surface	75	90		100	110	
D-B59W	n Different surfaces	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8, ...) <sup>Note 1</sup>	$90 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16, ...) <sup>Note 2</sup>		$100 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16, ...) <sup>Note 2</sup>	$110 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16, ...) <sup>Note 2</sup>	
	Same surface	$75 + 50(n-2)$ (n = 2, 3, 4, ...) <sup>Note 1</sup>	$90 + 50(n-2)$ (n = 2, 4, 6, 8, ...) <sup>Note 1</sup>		$100 + 50(n-2)$ (n = 2, 4, 6, 8, ...) <sup>Note 1</sup>	$110 + 50(n-2)$ (n = 2, 4, 6, 8, ...) <sup>Note 1</sup>	
	1	10	90		100	110	
D-B59W	2 Different surfaces	20	90		100	110	
	Same surface	75	90		100	110	
	n Different surfaces	$20 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8, ...) <sup>Note 1</sup>	$90 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16, ...) <sup>Note 2</sup>		$100 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16, ...) <sup>Note 2</sup>	$110 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16, ...) <sup>Note 2</sup>	
	Same surface	$75 + 50(n-2)$ (n = 2, 3, 4, ...) <sup>Note 1</sup>	$90 + 50(n-2)$ (n = 2, 4, 6, 8, ...) <sup>Note 1</sup>		$100 + 50(n-2)$ (n = 2, 4, 6, 8, ...) <sup>Note 1</sup>	$110 + 50(n-2)$ (n = 2, 4, 6, 8, ...) <sup>Note 1</sup>	
1	15	90		100	110		

Note 1) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.

Note 2) When "n" is an odd number, a multiple of 4 that is larger than this odd number is used for the calculation.

CVQ

CVQM

CVJ□

CVM□

CV3

CVS1

MVGQ

D-□

X-□

## Minimum Stroke For Auto Switch Mounting (Non-rotating Rod Type)

			n: Number of auto switches (mm)					
Auto switch model	No. of auto switches mounted	Mounting brackets other than center trunnion	Center trunnion					
			ø40	ø50	ø63	ø80	ø100	
<b>D-A3□</b> <b>D-G39</b> <b>D-K39</b>	2	Different surfaces	35	100		100	110	
		Same surface	100	100		100	110	
	n	Different surfaces	$35 + 30(n-2)$ (n = 2, 3, 4, ...)	$100 + 30(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)		$100 + 30(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	$100 + 30(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	
		Same surface	$100 + 100(n-2)$ (n = 2, 3, 4, ...)	$100 + 100(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)		$100 + 100(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	$100 + 100(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	
	1	10	75	80	80	90		
<b>D-A44</b>	2	Different surfaces	35	100		100	100	
		Same surface	55	75		80	90	
	n	Different surfaces	$35 + 30(n-2)$ (n = 2, 3, 4, ...)	$75 + 30(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)		$80 + 30(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	$100 + 30(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	
		Same surface	$55 + 50(n-2)$ (n = 2, 3, 4, ...)	$75 + 50(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)		$80 + 50(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	$90 + 50(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	
	1	10	75	80	80	90		
<b>D-A3□C</b> <b>D-G39C</b> <b>D-K39C</b>	2	Different surfaces	20	100		100	100	
		Same surface	100	100		100	100	
	n	Different surfaces	$20 + 35(n-2)$ (n = 2, 3, 4, ...)	$100 + 35(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)		$100 + 35(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	$100 + 35(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	
		Same surface	$100 + 100(n-2)$ (n = 2, 3, 4, 5-...)	$100 + 100(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)		$100 + 100(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	$100 + 100(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	
	1	10	75	80	80	90		
<b>D-A44C</b>	2	Different surfaces	20	75		80	90	
		Same surface	55	75		80	90	
	n	Different surfaces	$20 + 35(n-2)$ (n = 2, 3, 4, ...)	$75 + 35(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)		$80 + 35(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	$90 + 35(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	
		Same surface	$55 + 50(n-2)$ (n = 2, 3, 4, ...)	$75 + 50(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)		$80 + 50(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	$90 + 50(n-2)$ (n = 2, 4, 6, 8, ...) Note 1)	
	1	10	75	80	80	90		
<b>D-Z7□/Z80</b> <b>D-Y59□/Y7P</b> <b>D-Y7□W</b>	2 (Different surfaces, Same surface), 1	15	80	85	90	95	105	
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8-...) Note 1)	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16-...) Note 2)	$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16-...) Note 2)	$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16-...) Note 2)	$95 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16-...) Note 2)	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16-...) Note 2)	
<b>D-Y69□/Y7PV</b> <b>D-Y7□WV</b>	2 (Different surfaces, Same surface), 1	10	65		75	80	90	
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8-...) Note 1)	$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16-...) Note 2)		$75 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16-...) Note 2)	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16-...) Note 2)	$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16-...) Note 2)	

Note 1) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.  
 Note 2) When "n" is an odd number, a multiple of 4 that is larger than this odd number is used for the calculation.

**CVQ**  
**CVQM**  
**CVJ□**  
**CVM□**  
**CV3**  
**CVS1**  
**MVGQ**

**D-□**  
**-X□**

# CVS1 Series

## Operating Range


Auto switch model	Bore size (mm)				
	40	50	63	80	100
D-M9□/M9□V D-M9□W/M9□WV D-M9□A/M9□AV	4.5	5	5.5	5	6
D-A9□/A9□V	7	—	9	9	9
D-Z7□/Z80	8	7	9	9.5	10.5
D-A3□/A44 D-A3□C/A44C	9	10	11	11	11
D-A5□/A6□					
D-B5□/B64					
D-A59W	13	13	14	14	15
D-B59W	14	14	17	16	18
D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV	8	7	5.5	6.5	6.5
D-F5□/J59 D-F5□W/J59W D-F5NT/F59F	4	4	4.5	4.5	4.5
D-G5□/K59 D-G5□W/K59W D-G5NT/G59F	5	6	6.5	6.5	7
D-G39/K39 D-G39C/K39C	9	9	10	10	11

\* D-A9□ and D-A9□V types cannot be mounted on ø50  
 \* Since this is a guideline including hysteresis, not meant to be guaranteed. (Assuming approximately ±30% dispersion.)  
 There may be the case it will vary substantially depending on an ambient environment.

## Auto Switch Mounting Bracket Part No.

### <Tie-rod mounting type>

Auto switch model	Bore size (mm)				
	40	50	63	80	100
D-M9□/M9□V D-M9□W/M9□WV D-M9□A/M9□AV D-A9□/A9□V	BA7-040	BA7-040	BA7-063	BA7-080	BA7-080
D-F5□/J59 D-F5□W/J59W D-F59F/F5NT D-A5□/A6□ D-A59W	BT-04	BT-04	BT-06	BT-08	BT-08
D-G39C/K39C D-A3□C/A44C	BA3-040	BA3-050	BA3-063	BA3-080	BA3-100
D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV D-Y7BA D-Z7□/Z80	BA4-040	BA4-040	BA4-063	BA4-080	BA4-080



\* The figure shows the mounting example for the D-M9□(V)/M9□W(V)/M9□A(V)/A9□(V) types.

### <Band mounting type>

#### Standard

Auto switch model	Bore size (mm)				
	40	50	63	80	100
D-G39/K39 D-A3□/A44	BDS-04M	BDS-05M	BMB1-063	BMB1-080	BMB1-100
D-G5□/K59 D-G5□W/K59W D-G59F D-G5NT D-B5□/B64 D-B59W	BH2-040	BA5-050	BAF-06	BAF-08	BAF-10

#### Non-rotating rod

Auto switch model	Bore size (mm)				
	40	50	63	80	100
D-G39/K39 D-A3□/A44	BD1-04M	BD1-05M	BD1-06M	BD1-08M	BD1-10M
D-G5□/K59 D-G5□W/K59W D-G59F D-G5NT D-B5□/B64 D-B59W	BA-04	BA-05	BA-06	BA-08	BA-10

Note 1) Auto switch brackets are included in the D-A3□C/A44C/G39C/K39C types. Specify the part number as follows depending on the cylinder size when ordering.  
 (Example) ø40: D-A3□C-4, ø50: D-A3□C-5, ø63: D-A3□C-6, ø80: D-A3□C-8, ø100: D-A3□C-10

Other than the models listed in "How to Order", the following auto switches are applicable.  
For detailed specifications, refer to pages 941 to 1067.

Auto switch type	Model	Electrical entry (Fetching direction)	Features
<b>Reed</b>	D-A93V, A96V	Grommet (Perpendicular)	—
	D-A90V		Without indicator light
	D-A53, A56, B53, Z73, Z76	Grommet (In-line)	—
	D-A67, Z80		Without indicator light
<b>Solid state</b>	D-M9NV, M9PV, M9BV	Grommet (Perpendicular)	—
	D-Y69A, Y69B, Y7PV		Diagnostic indication (2-color indicator)
	D-M9NWV, M9PWV, M9BWW		
	D-Y7NWW, Y7PWW, Y7BWW		Water resistant (2-color indicator)
	D-M9NAV, M9PAV, M9BAV		
	D-Y59A, Y59B, Y7P		—
	D-F59, F5P, J59	Grommet (In-line)	Diagnostic indication (2-color indicator)
	D-Y7NW, Y7PW, Y7BW		
	D-F59W, F5PW, J59W		With timer
	D-F5NT, G5NT		

\* With pre-wired connector is also available in solid state auto switches. For details, refer to pages 1014 and 1015.

\* Normally closed (NC = b contact), solid state auto switch (D-F9G/F9H/Y7G/Y7H type) are also available. For details, refer to pages 959 and 961.

**CVQ**

**CVQM**

**CVJ**

**CVM**

**CV3**

**CVS1**

**MVGQ**

**D-**

**-X**